

OCCUPANCY CLASSIFICATION (SECTION 305.1):
GROUP B - OFFICE / A-3 - ASSEMBLY.

CONSTRUCTION TYPE (TABLE 503 & 601):ED
TYPE V-B - NON-RATED
BEARING & NON-BEARING WALLS:
INTERIOR - NO RATING REQUIRED
EXTERIOR - NO RATING REQUIRED
EXTERIOR DOORS & WINDOWS:
OPENING PROTECTION NOT REQUIRED

AUTOMATIC FIRE SPRINKLER SYSTEM (SECTION 903.2.1.3):
PROVIDED WITH FULLY AUTOMATIC FIRE SPRINKLER SYSTEM.

BUILDING HEIGHT (TABLE 503):
ALLOWABLE BUILDING HEIGHT A-3 = 1 STORY, 40 FEET
B = 2 STORY, 40 FEET
ACTUAL BUILDING HEIGHT 1 STORY, 22 FEET

SITE AREA:
1.8 ACRES

OCCUPANCY LOADING FACTORS:
GROUP B 1 PER 100
GROUP A 1 PER 7

BUILDING AREA (TABLE 503):
ACTUAL ENCLOSED BUILDING AREA 16,245 S.F.
ACTUAL UNENCLOSED CANOPY/OVERHANG 845 S.F.
TOTAL COMBINED AREA 17,090 S.F.

ALLOWABLE BUILDING AREA A-3, S1 (MORE RESTRICTIVE) 6,000 S.F.
ALLOWABLE BUILDING AREA B, S1 9,000 S.F.
ALLOWABLE BUILDING AREA WITH SPRINKLERS (200% INCREASE CBC504.2) 18,000 S.F.

OCCUPANCY SEPARATIONS:
1-HR BETWEEN B & A-3 PROVIDED.

EXTERIOR WALL FIRE RATINGS

WALL DESIGNATION	FIRE SEPARATION DISTANCE	REQUIRED FIRE RATING	ACTUAL FIRE RATING	MAX. ALLOWABLE UNPROTECTED OPENINGS (AS A PERCENTAGE OF TOTAL WALL AREA)	ACTUAL UNPROTECTED OPENINGS (AS A PERCENTAGE OF TOTAL WALL AREA)
W1	+30'-0"	NR	NR	NO LIMIT	TOTAL WALL AREA: 1,132 s.f. OPENING AREA: 149 s.f. 14%
W2	+30'-0"	NR	NR	NO LIMIT	TOTAL WALL AREA: 1,132 s.f. OPENING AREA: 106 s.f. 10%
W3	+30'-0"	NR	NR	NO LIMIT	TOTAL WALL AREA: 573 s.f. OPENING AREA: 64 s.f. 12%
W4	+30'-0"	NR	NR	NO LIMIT	TOTAL WALL AREA: 1,476 s.f. OPENING AREA: 272 s.f. 19%


LEGEND:

- 1-HR FOR RATED OCCUPANCY SEPARATION.
- 31 → OCCUPANCY LOAD EXITING THROUGH DESIGNATED OPENING.
- ⊗ ILLUMINATED EXIT SIGN - SEE ELECTRICAL DRAWINGS.

GENERAL SHEET NOTES:


- FOR ADDITIONAL FLOOR PLAN INFORMATION, SEE A1.0.
- FOR ADDITIONAL EQUIPMENT INFORMATION, SEE A7.2.

2 Building Data

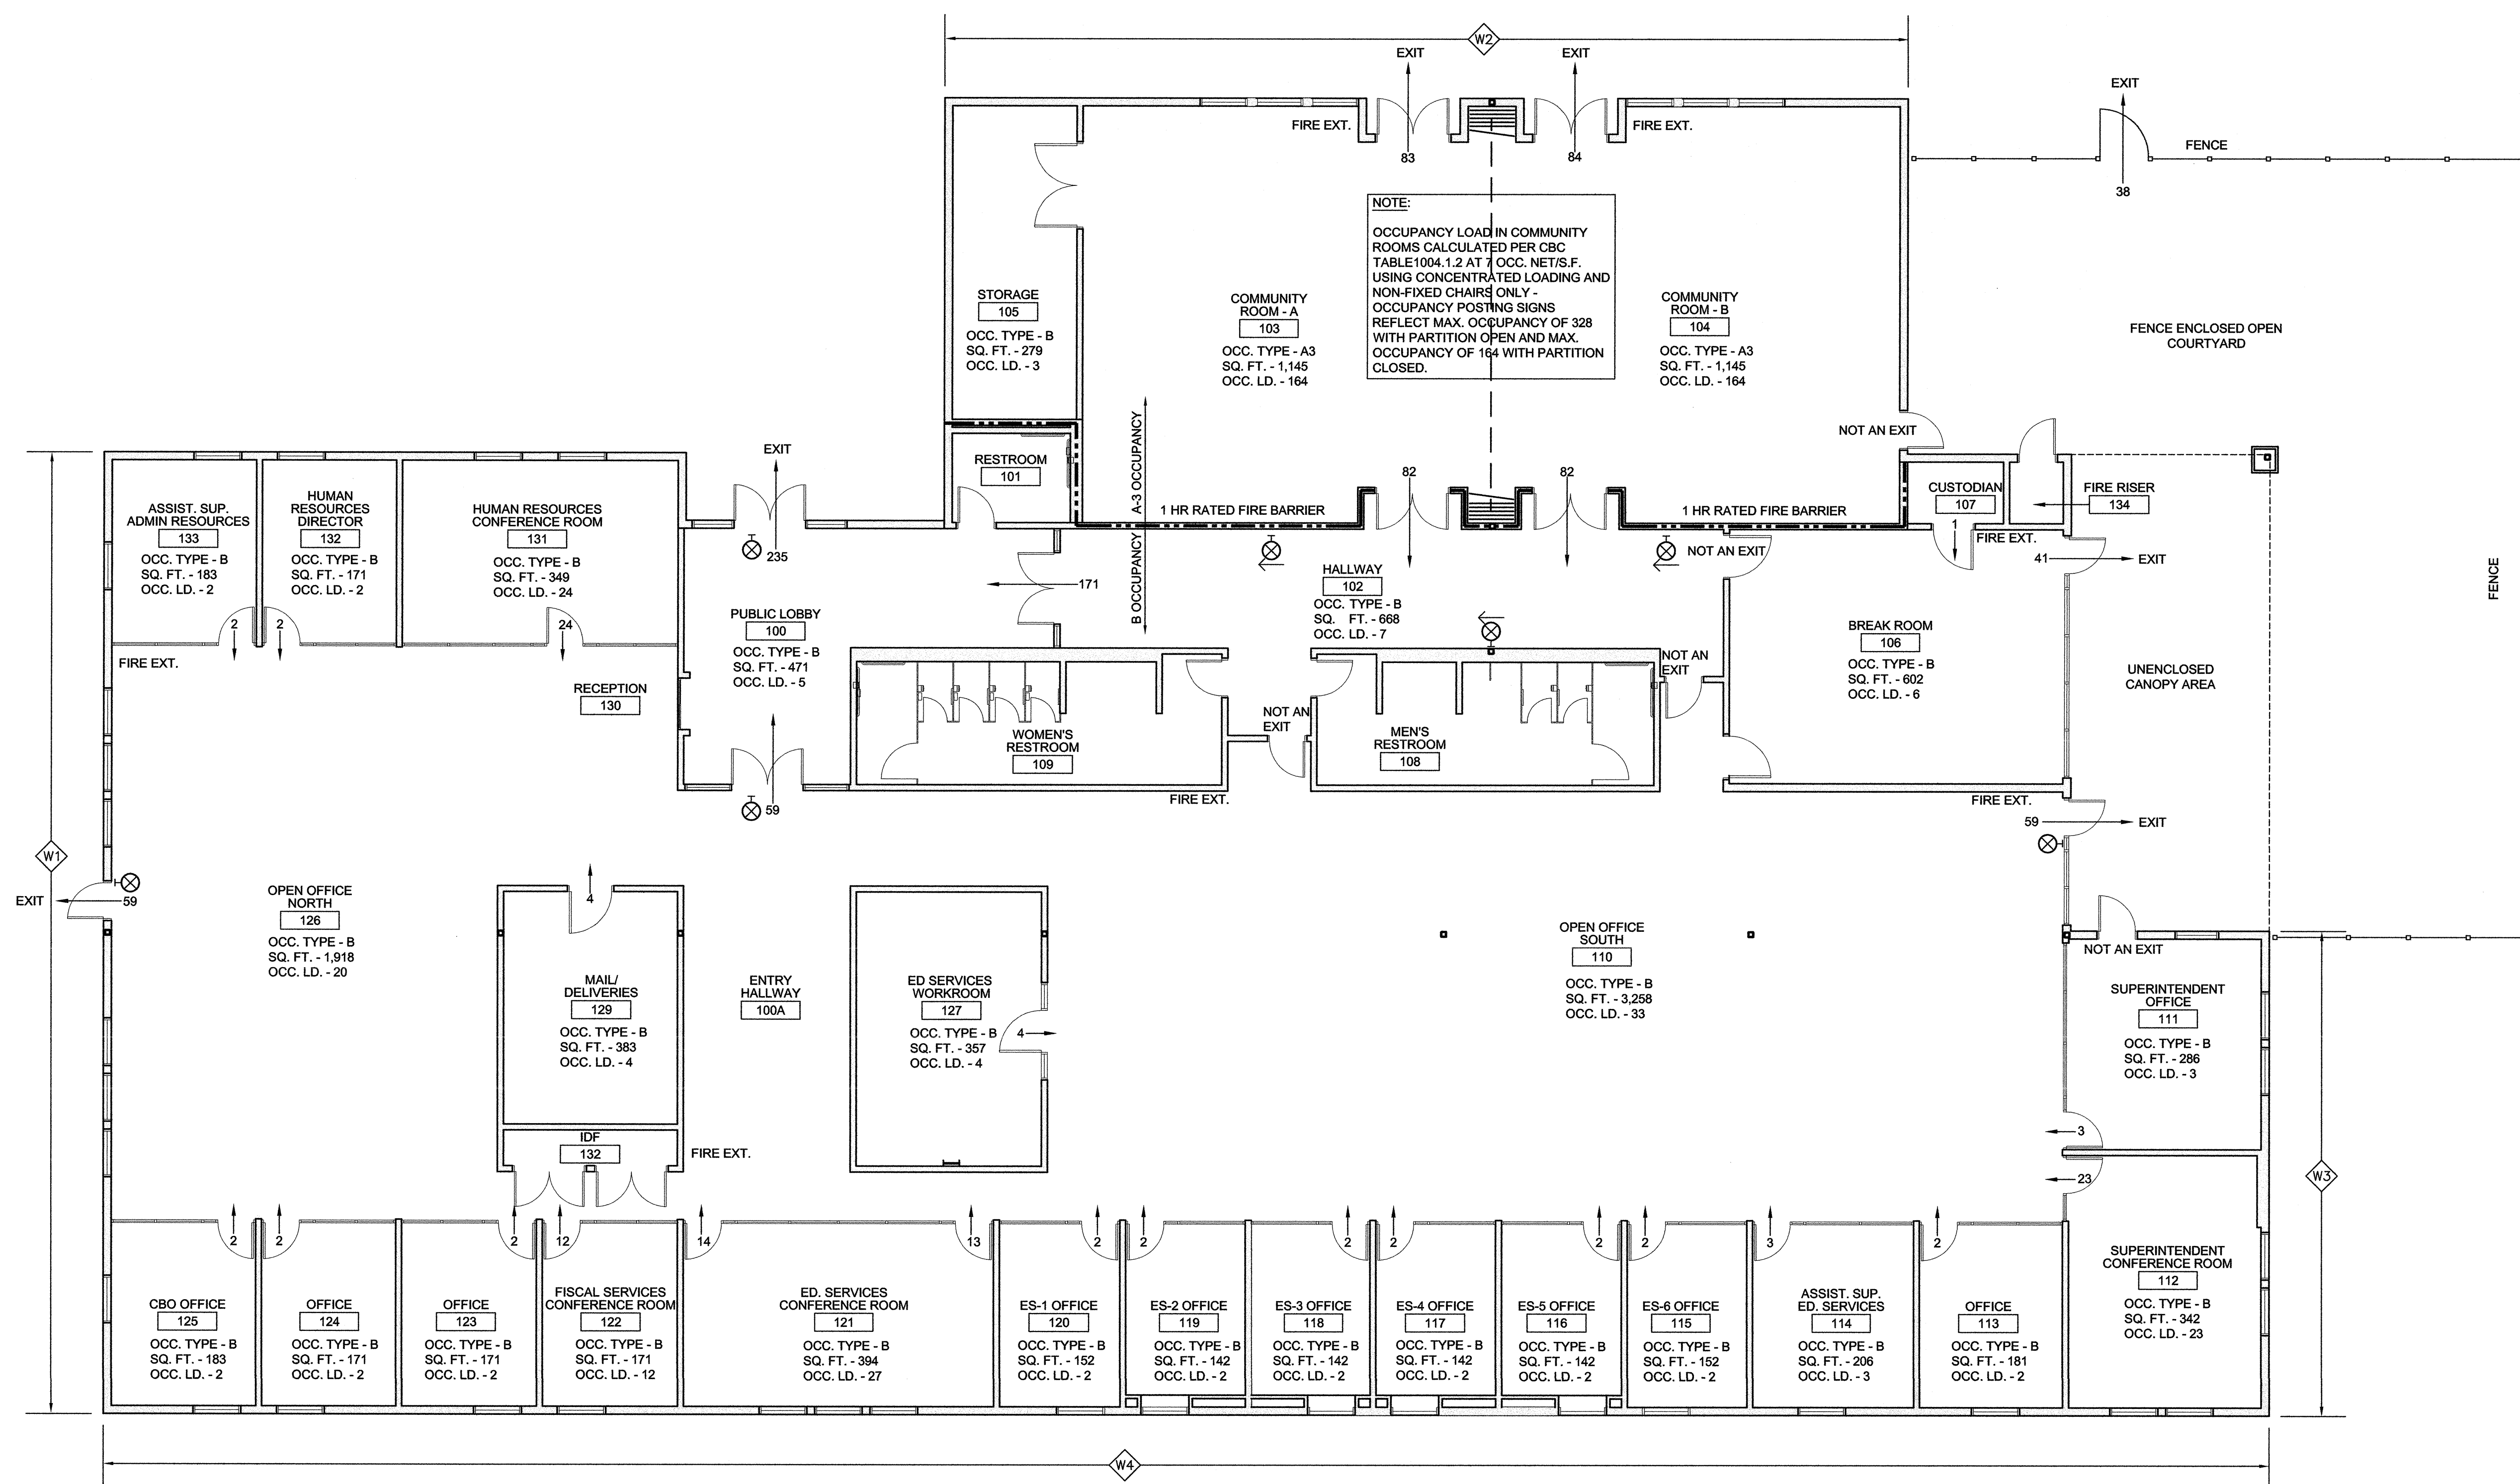

1 Building Code Analysis Plan

SCALE: 1/8" = 1'-0"



Dry Creek Joint Elementary School District
District Education Center

8849 Cook Riolo Road, Roseville, CA 95747

Dry Creek Joint Elementary School District

FILE NO. 31-15


IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-115456
AC. TM FLS SS. DE
DATE 2/23/17

DIVISION OF THE STATE ARCHITECT
revision date: by:

CONSULTANT

nacht&lewis

600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtandlewis.com
916.329.4000

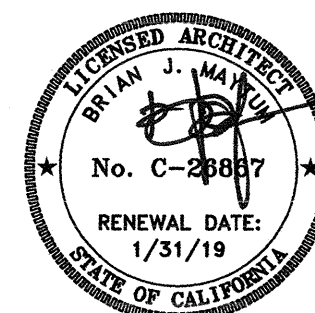

ARCHITECT

INITIAL BOX

NO.	DWG BY	DATE	REVIEWED

REVISIONS

NO.	DESCRIPTION	DATE	REV'D
	100% design development	7/6/16	
	75% construction documents	9/20/16	
	DSA submittal	12/31/16	
	DSA approval	02/23/17	

DATE February 23, 2017

JOB NO. Y1538.00

SHEET TITLE

Building Code
Analysis Plan

SHEET NO.

A0.0

SHEET ____ OF ____ TOTAL

CREEKVIEW RANCH MIDDLE SCHOOL ROAD

COOK-RIOLO ROAD

PROPERTY LINE

(E) FIRE HYDRANT

NEW AC PAVED PARKING

NEW ACCESSIBLE PARKING

(E) DRIVEWAY

(E) CROSSWALK

(E) DROP OFF

NEW VEHICLE TRAFFIC GATE

(E) AC PAVED PARKING

(E) FIRE HYDRANT - RELOCATED

NEW AC PAVED PARKING

OUTDOOR COURTYARD

(E) TREES TO REMAIN

MECHANICAL EQUIPMENT YARD

UTILITY EASEMENT

**NEW DISTRICT EDUCATION CENTER
(DEC)**

**EXISTING DISTRICT SUPPORT SERVICES FACILITY (DSSF)
(NOT A PART OF THIS CONTRACT)**

(E) AC PAVED BUS PARKING

**(E) NEIGHBORING RESIDENTIAL PROPERTY.
COORDINATE ACCESS WITH DRY CREEK JESD
AND PROPERTY OWNER PRIOR TO ACCESS.**

PROPERTY LINE

north

1 Overall Site Plan

SCALE: 1" = 20'-0"

NUMBER OF STALLS PROVIDED:	74
NUMBER OF ACCESSIBLE STALLS REQUIRED:	3
NUMBER OF ACCESSIBLE STALLS PROVIDED:	4
NUMBER OF VAN ACCESSIBLE STALLS PROVIDED:	1

8849 Cook Riolo Road, Roseville, CA 95747
Dry Creek Joint Elementary School District

SHEET ____ OF ____ TOTAL

ONE AND ONE-HALF INCH = ONE FOOT
ONE INCH = ONE FOOT
THREE-QUARTERS INCH = ONE FOOT
ONE-HALF INCH = ONE FOOT
ONE-QUARTER INCH = ONE FOOT
ONE-EIGHTH INCH = ONE FOOT
ONE-SIXTEENTH INCH = ONE FOOT
ONE INCH = TWENTY FEET

COOK-RIOLO ROAD

CREEKVIEW RANCH MIDDLE SCHOOL ROAD


TRAFFIC GATE

EXISTING DISTRICT SUPPORT SERVICES (DSSF) (NOT A PART OF THIS CONTRACT)

(E) NEIGHBORING RESIDENTIAL PROPERTY. COORDINATE ACCESS WITH DRY CREEK JESD AND PROPERTY OWNER PRIOR TO ACCESS.

1 Demolition Site Plan

SCALE: 1" = 20'-0"



GENERAL SHEET NOTES:

THESE GENERAL NOTES APPLY TO THIS SHEET ONLY.

- COORDINATE ALL DEMOLITION WORK SHOWN WITH CIVIL DRAWINGS AND OTHER TRADES.
- SELECTED EXISTING UTILITIES ARE SHOWN APPROXIMATELY, AND FOR COORDINATION PURPOSES. ALL UTILITIES ARE NOT SHOWN. THE CONTRACTOR SHALL VERIFY ALL EXISTING UTILITIES IN FIELD, AND COORDINATE ALL WORK WITH MECHANICAL, PLUMBING, ELECTRICAL AND LANDSCAPE DOCUMENTS.
- SEE ENLARGED PLANS REFERENCED ON SHEET A0.3 FOR ADDITIONAL DEMOLITION WORK.
- ALL EXISTING TREES NOT NOTED FOR REMOVAL ARE TO REMAIN, TYPICAL. PROTECT IN PLACE THROUGHOUT CONSTRUCTION. SEE SHEET C1.1.
- FOR DEMOLITION PHOTOGRAPHS, SEE SHEET A0.6

DEMOLITION KEYNOTES:

THESE DEMOLITION KEYNOTES APPLY TO THIS SHEET ONLY.

- CAREFULLY REMOVE FIRE HYDRANT AND FDC SERVING DSSF AND STORE FOR RELOCATION.
- REMOVE A.C. PAVING TO THE EXTENT INDICATED.
- REMOVE CONCRETE CURB TO THE EXTENT INDICATED.
- (E) DECORATIVE WIRE FENCING. CAREFULLY REMOVE TO THE EXTENT INDICATED. SALVAGE PANNELLING FOR RE-USE. DISCARD POSTS ONLY. WHERE MOW STRIP IS NOTED TO REMAIN, REMOVE STEEL POSTS BY SAWING AND GRINDING FLUSH AT THE BASE. PACK POST CAVITY WITH NON-SHRINK GROUT, FLUSH. WHERE MOW STRIP IS NOTED FOR REMOVAL, REMOVE STEEL POSTS AND FOOTINGS TO BELOW FINISH GRADE.
- (E) DECORATIVE WIRE GATE. CAREFULLY REMOVE. DISCARD OR DELIVER TO OWNER AS DIRECTED.
- (E) DECORATIVE WIRE VEHICLE GATE. CAREFULLY REMOVE, AND SALVAGE COMPONENTS FOR REINSTALLATION.
- (E) DECORATIVE WIRE CANTILEVER VEHICLE GATE. CAREFULLY REMOVE, AND SALVAGE COMPONENTS FOR REINSTALLATION.
- REMOVE CHAIN LINK FENCE, INCLUDING ALL POSTS AND FOOTINGS.
- CAREFULLY REMOVE LIGHT STANDARD AND SALVAGE FOR REINSTALLATION. REMOVE ALL ASSOCIATED ITEMS, SUCH AS PULL BOXES AND JUNCTION BOXES, AS REQUIRED FOR RELOCATION. SEE ELECTRICAL DRAWINGS.
- REMOVE TREE AND ROOT BALL.
- PAIR OF EMPTY CONDUITS WITH PULL STRINGS, FROM EXISTING IRRIGATION CONTROLLER. EXTEND AS REQUIRED. LOCATION SHOWN IS APPROXIMATE, VERIFY IN FIELD.
- REMOVE EXISTING SIGNS AND POST. STORE FOR REUSE.
- (E) CARGO CONTAINERS TO BE RELOCATED BY OWNER - NOT A PART OF THIS CONTRACT.

KEYNOTES:

THESE KEYNOTES APPLY TO THIS SHEET ONLY.

- (E) OVERHEAD POWER AND TELEPHONE LINES.
- (E) SMUD PRIMARY PULL BOX
- (E) SMUD SWITCHGEAR BOX
- (E) TELEPHONE PULL BOX.
- (E) FIRE ALARM BOX.
- (E) ELECTRICAL PULL BOX.
- (E) LIGHT STANDARD TO REMAIN.
- (E) CHAIN LINK FENCE TO REMAIN.
- (E) CONCRETE CURB TO REMAIN.
- (E) STOP SIGN TO REMAIN.
- (E) GATE TO REMAIN. GATE IS MOUNTED TO CHAIN LINK FENCE TO BE REMOVED. DETACH AND REMOVE CHAIN LINK FENCE FROM GATE POST AND LEAVE IN PLACE. GRID SMOOTH / TOUCH UP PAINT ANY WELDS OR DAMAGE.
- (E) GATE TO REMAIN.
- (E) FIRE HYDRANT TO REMAIN.
- (E) POST INDICATOR VALVE, TO REMAIN.
- RELOCATE (E) FIRE DEPARTMENT CONNECTION, SEE CIVIL DRAWINGS.
- (E) IRRIGATION CONTROLLER.
- APPROXIMATE LOCATION OF EXISTING ELECTRICAL CONDUITS, MARKED WITH LABELED STAKES. VERIFY IN FIELD. PROTECT IN PLACE.
- NOT USED
- (E) TREES TO REMAIN - PROTECT IN PLACE
- TUNNEL BORE UNDER ENTRANCE DRIVE FOR NEW GAS SERVICE AND ELECTRICAL CONDUIT FOR FUTURE NORTH PARKING LOT LIGHTING. DO NOT CUT (E) PAVING OR CURBS. PROTECT ADJACENT ITEMS AS REQUIRED. VERIFY LOCATION AND CONDITIONS IN FIELD. SEE SHEET P1.0 AND E1.2.

LEGEND:


	DEMO (E) SITE CONCRETE		DEMO (E) AC PAVING.
	DEMO (E) CONCRETE CURB		DEMO (E) LANDSCAPING.

Dry Creek Joint Elementary School District District Education Center

8849 Cook Riolo Road, Roseville, CA 95747

Dry Creek Joint Elementary School District

FILE NO. 31-15

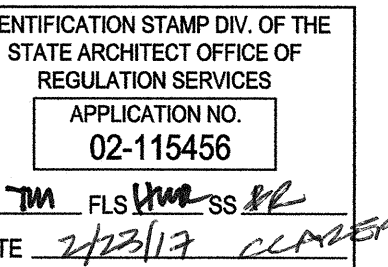


DIVISION OF THE STATE ARCHITECT
revision date: by:

CONSULTANT

nacht&lewis

600 O Street, Suite 100
Sacramento, CA 95811
www.nachtlewis.com
916.329.4000

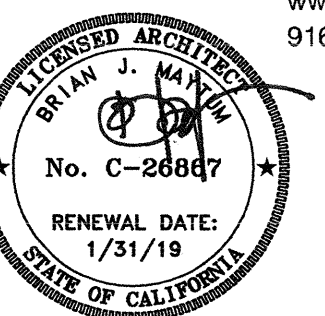

ARCHITECT

INITIAL BOX

NO.	DWG BY	DATE	REVIEWED

REVISIONS

NO.	DESCRIPTION	DATE	REV'D
	100% design development	7/8/16	
	75% construction documents	9/20/16	
	DSA submittal	12/31/16	
	DSA approval	02/23/17	

DATE February 23, 2017

JOB NO. Y1538.00

SHEET TITLE


Demolition
Site Plan

SHEET NO.

A0.2

SHEET OF TOTAL

ONE INCH = TWENTY FEET
ONE-SIXTEENTH INCH = ONE FOOT
ONE-EIGHTH INCH = ONE FOOT
ONE-FOURTH INCH = ONE FOOT
ONE-HALF INCH = ONE FOOT
THREE-QUARTERS INCH = ONE FOOT
ONE INCH = ONE FOOT
ONE AND ONE-HALF INCH = ONE FOOT

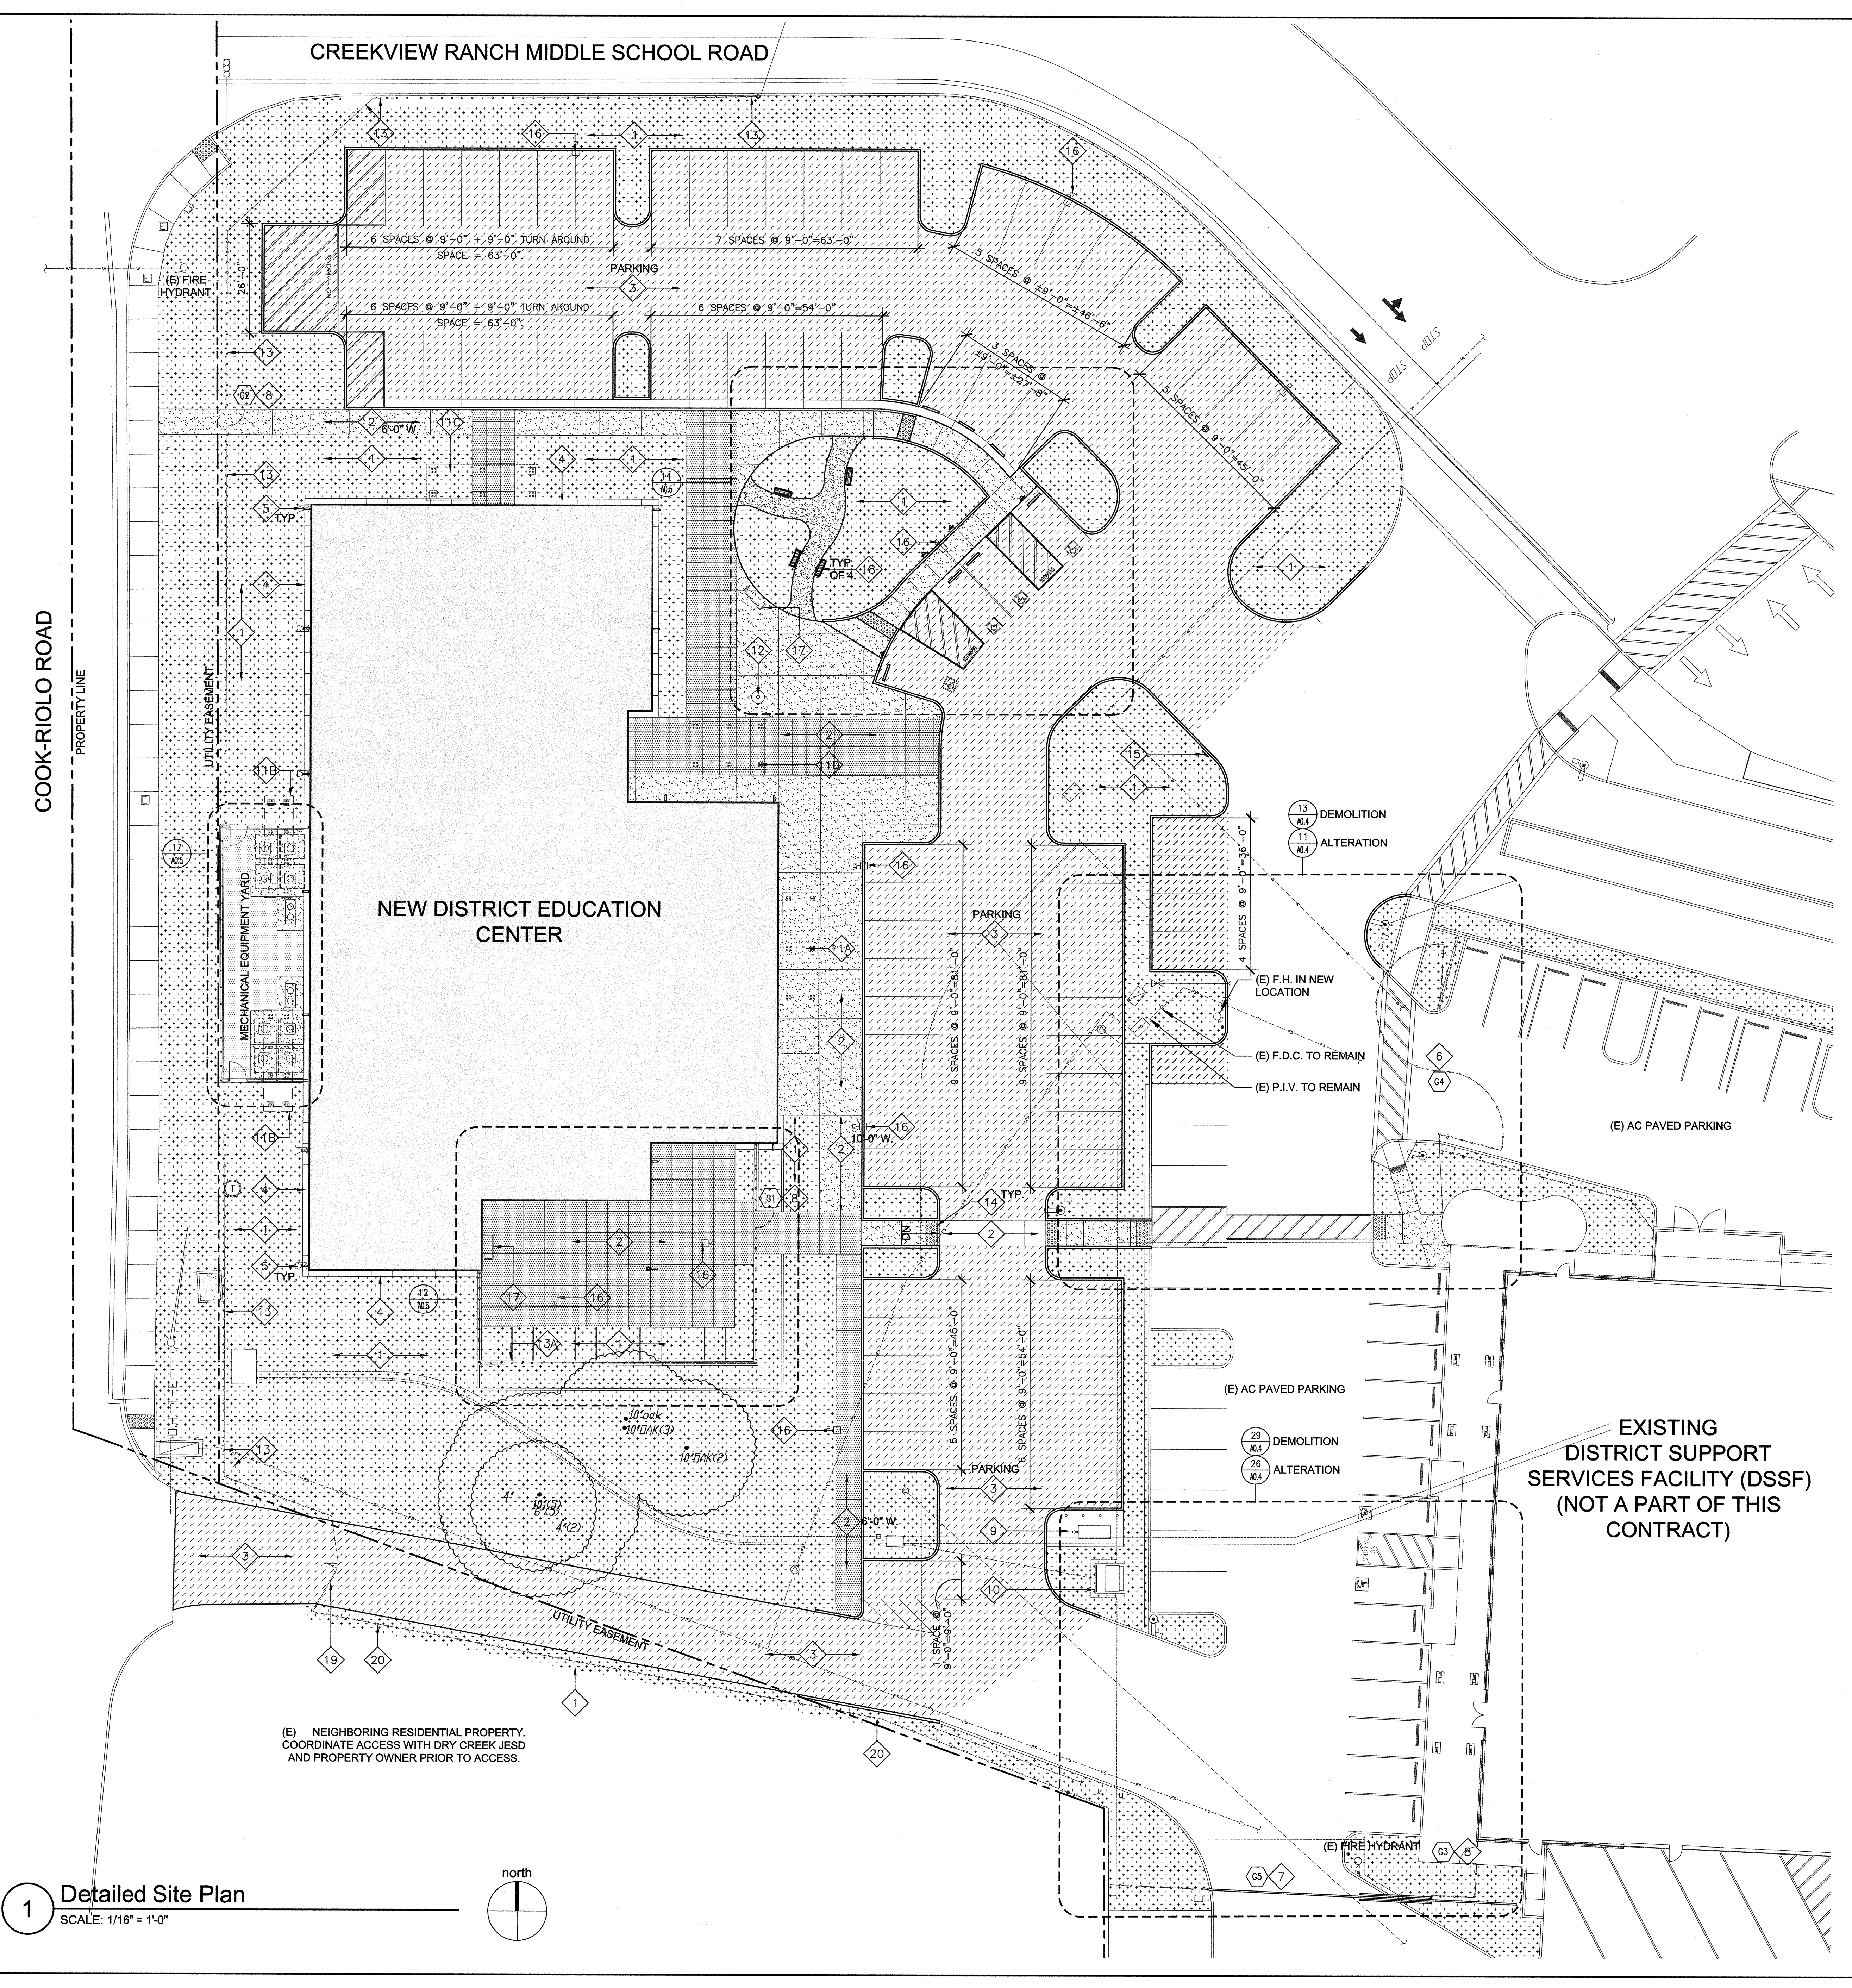

GENERAL SHEET NOTES:
THESE NOTES APPLY TO THIS SHEET ONLY.

1. SEE ADDITIONAL ARCHITECTURAL SITE PLANS, CIVIL DRAWINGS AND OTHER TRADES FOR DEMOLITION AND NEW WORK NOT SHOWN HERE.
2. SELECTED EXISTING UTILITIES ARE SHOWN APPROXIMATELY, AND FOR COORDINATION PURPOSES. NOT ALL UTILITIES ARE SHOWN. THE CONTRACTOR SHALL VERIFY ALL EXISTING UTILITIES IN FIELD, AND COORDINATE ALL WORK WITH CIVIL, MECHANICAL, PLUMBING, ELECTRICAL AND LANDSCAPE DOCUMENTS.

KEYNOTES:
THESE KEYNOTES APPLY TO THIS SHEET ONLY.

1. NEW LANDSCAPE AREA - SEE LANDSCAPE DRAWINGS.
2. NEW PORTLAND CEMENT CONCRETE PAVING - SEE DETAILS ON C6.2.
3. NEW ASPHALT CONCRETE PAVING - SEE CIVIL DRAWINGS FOR PAVING SECTIONS.
4. NEW 18" CONCRETE MOW STRIP - SEE DETAIL 2 / C6.2.
5. PROVIDE PRE-CAST CONCRETE SPLASH BLOCK AT ALL RAINWATER LEADERS THAT SPILL TO GRADE.
6. INSTALL EXISTING DECORATIVE WIRE VEHICLE SWING GATE IN NEW LOCATION. SEE ENLARGED PLANS FOR ADDITIONAL NOTES, AND DETAIL 14 / A0.6.
7. INSTALL EXISTING DECORATIVE WIRE VEHICLE CANTILEVER GATE IN NEW LOCATION. SEE ENLARGED PLANS FOR ADDITIONAL NOTES, AND DETAIL 13 / A0.6 RELOCATE ALL ASSOCIATED ITEMS, SUCH AS PULL BOXES AND JUNCTION BOXES. SEE ELECTRICAL DRAWINGS.
8. (G) INDICATES SCHEDULED GATE. REFER TO DOOR SCHEDULE, SHEET A6.1. NOT ALL GATES ARE SCHEDULED. SEE OTHER NOTES AND ENLARGED PLANS FOR ADDITIONAL REQUIREMENTS.
9. NEW GAS METER ASSEMBLY.
10. EXISTING TRANSFORMER AND PAD TO REMAIN.
11. NEW WOOD PERGOLA - SEE DETAIL 1/A0.7.
12. NEW WOOD PERGOLA - SEE DETAIL 2/A0.7.
13. NEW WOOD PERGOLA - SEE DETAIL 3/A0.7.
14. NEW WOOD PERGOLA - SEE DETAIL 11/A0.8.
15. NEW 35" TALL ALUMINUM FLAG POLE - SEE DETAIL 22/A0.5 AND SPEC SECTION 10 75 16.
16. NEW 6'-0" HIGH DECORATIVE WIRE FENCE, SEE 15 / A0.6.
17. NEW 6'-0" HIGH DECORATIVE WIRE FENCE, SEE 15 / A0.6 - ON 12" WIDE CONC. MOW STRIP PER 1/C6.2.
18. NEW DETECTABLE WARNING, CAST IN PLACE TRUNCATED DOWNS, 36" WIDE. SEE 29 / A0.5.
19. EXISTING VEHICLE TOW AWAY SIGN. SEE 19 / A0.5 FOR EXISTING TEXT. SALVAGE FOR REUSE WITH NEW POST AT THIS LOCATION.
20. NEW LIGHT POLE STANDARD - SEE ELECTRICAL DRAWINGS.
21. NEW BICYCLE RACK - SEE SPEC SECTION 10 00 00.
22. NEW PRE-CAST 6'-0" LONG CONCRETE BENCH - SEE SPEC SECTION 10 00 00.
23. NEW 22'-0" PAIR OF PIPE GATES. SEE DETAIL 16/A0.6.
24. NEW 6'-0" CHAIN LINK FENCING.

LEGEND: SEE CIVIL DRAWINGS FOR PAVING DETAILS.

- CONCRETE PAVING
- INTEGRALLY COLORED CONCRETE PAVING
- A.C. PAVING
- LANDSCAPING
- GATE TYPE - SEE A6.1.


Dry Creek Joint Elementary School District
District Education Center
8849 Cook Riolo Road, Roseville, CA 95747
Dry Creek Joint Elementary School District

FILE NO. 31-15
IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-115456
AC. TM FLS HWS SS
DATE 2/23/19

DIVISION OF THE STATE ARCHITECT
revision date: by:

CONSULTANT

nacht&lewis
600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtandlewis.com
916.329.4000

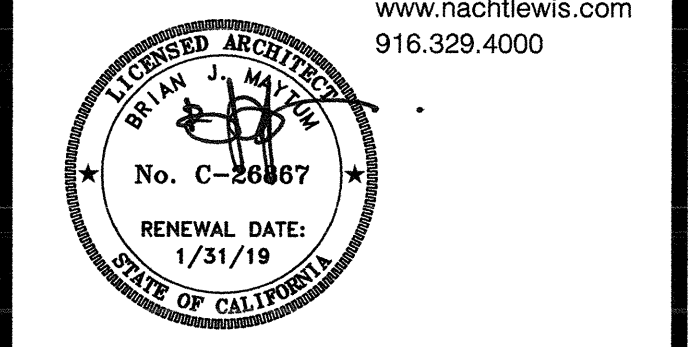

ARCHITECT

INITIAL BOX			
NO.	DWG BY	DATE	REVIEWED



REVISIONS			
NO.	DESCRIPTION	DATE	REV
	100% design development	7/6/16	
	75% construction documents	9/20/16	
	DSA submittal	12/31/16	
	DSA approval	02/23/17	

DATE February 23, 2017
JOB NO. Y1538.00
SHEET TITLE



Detailed
Site Plan

SHEET NO.
A0.3
SHEET OF TOTAL

ONE AND ONE-HALF INCH = ONE FOOT
ONE INCH = ONE FOOT
THREE-QUARTERS INCH = ONE FOOT
ONE-HALF INCH = ONE FOOT
ONE-QUARTER INCH = ONE FOOT
ONE-EIGHTH INCH = ONE FOOT
ONE-SIXTEENTH INCH = ONE FOOT
ONE INCH = TWENTY FEET

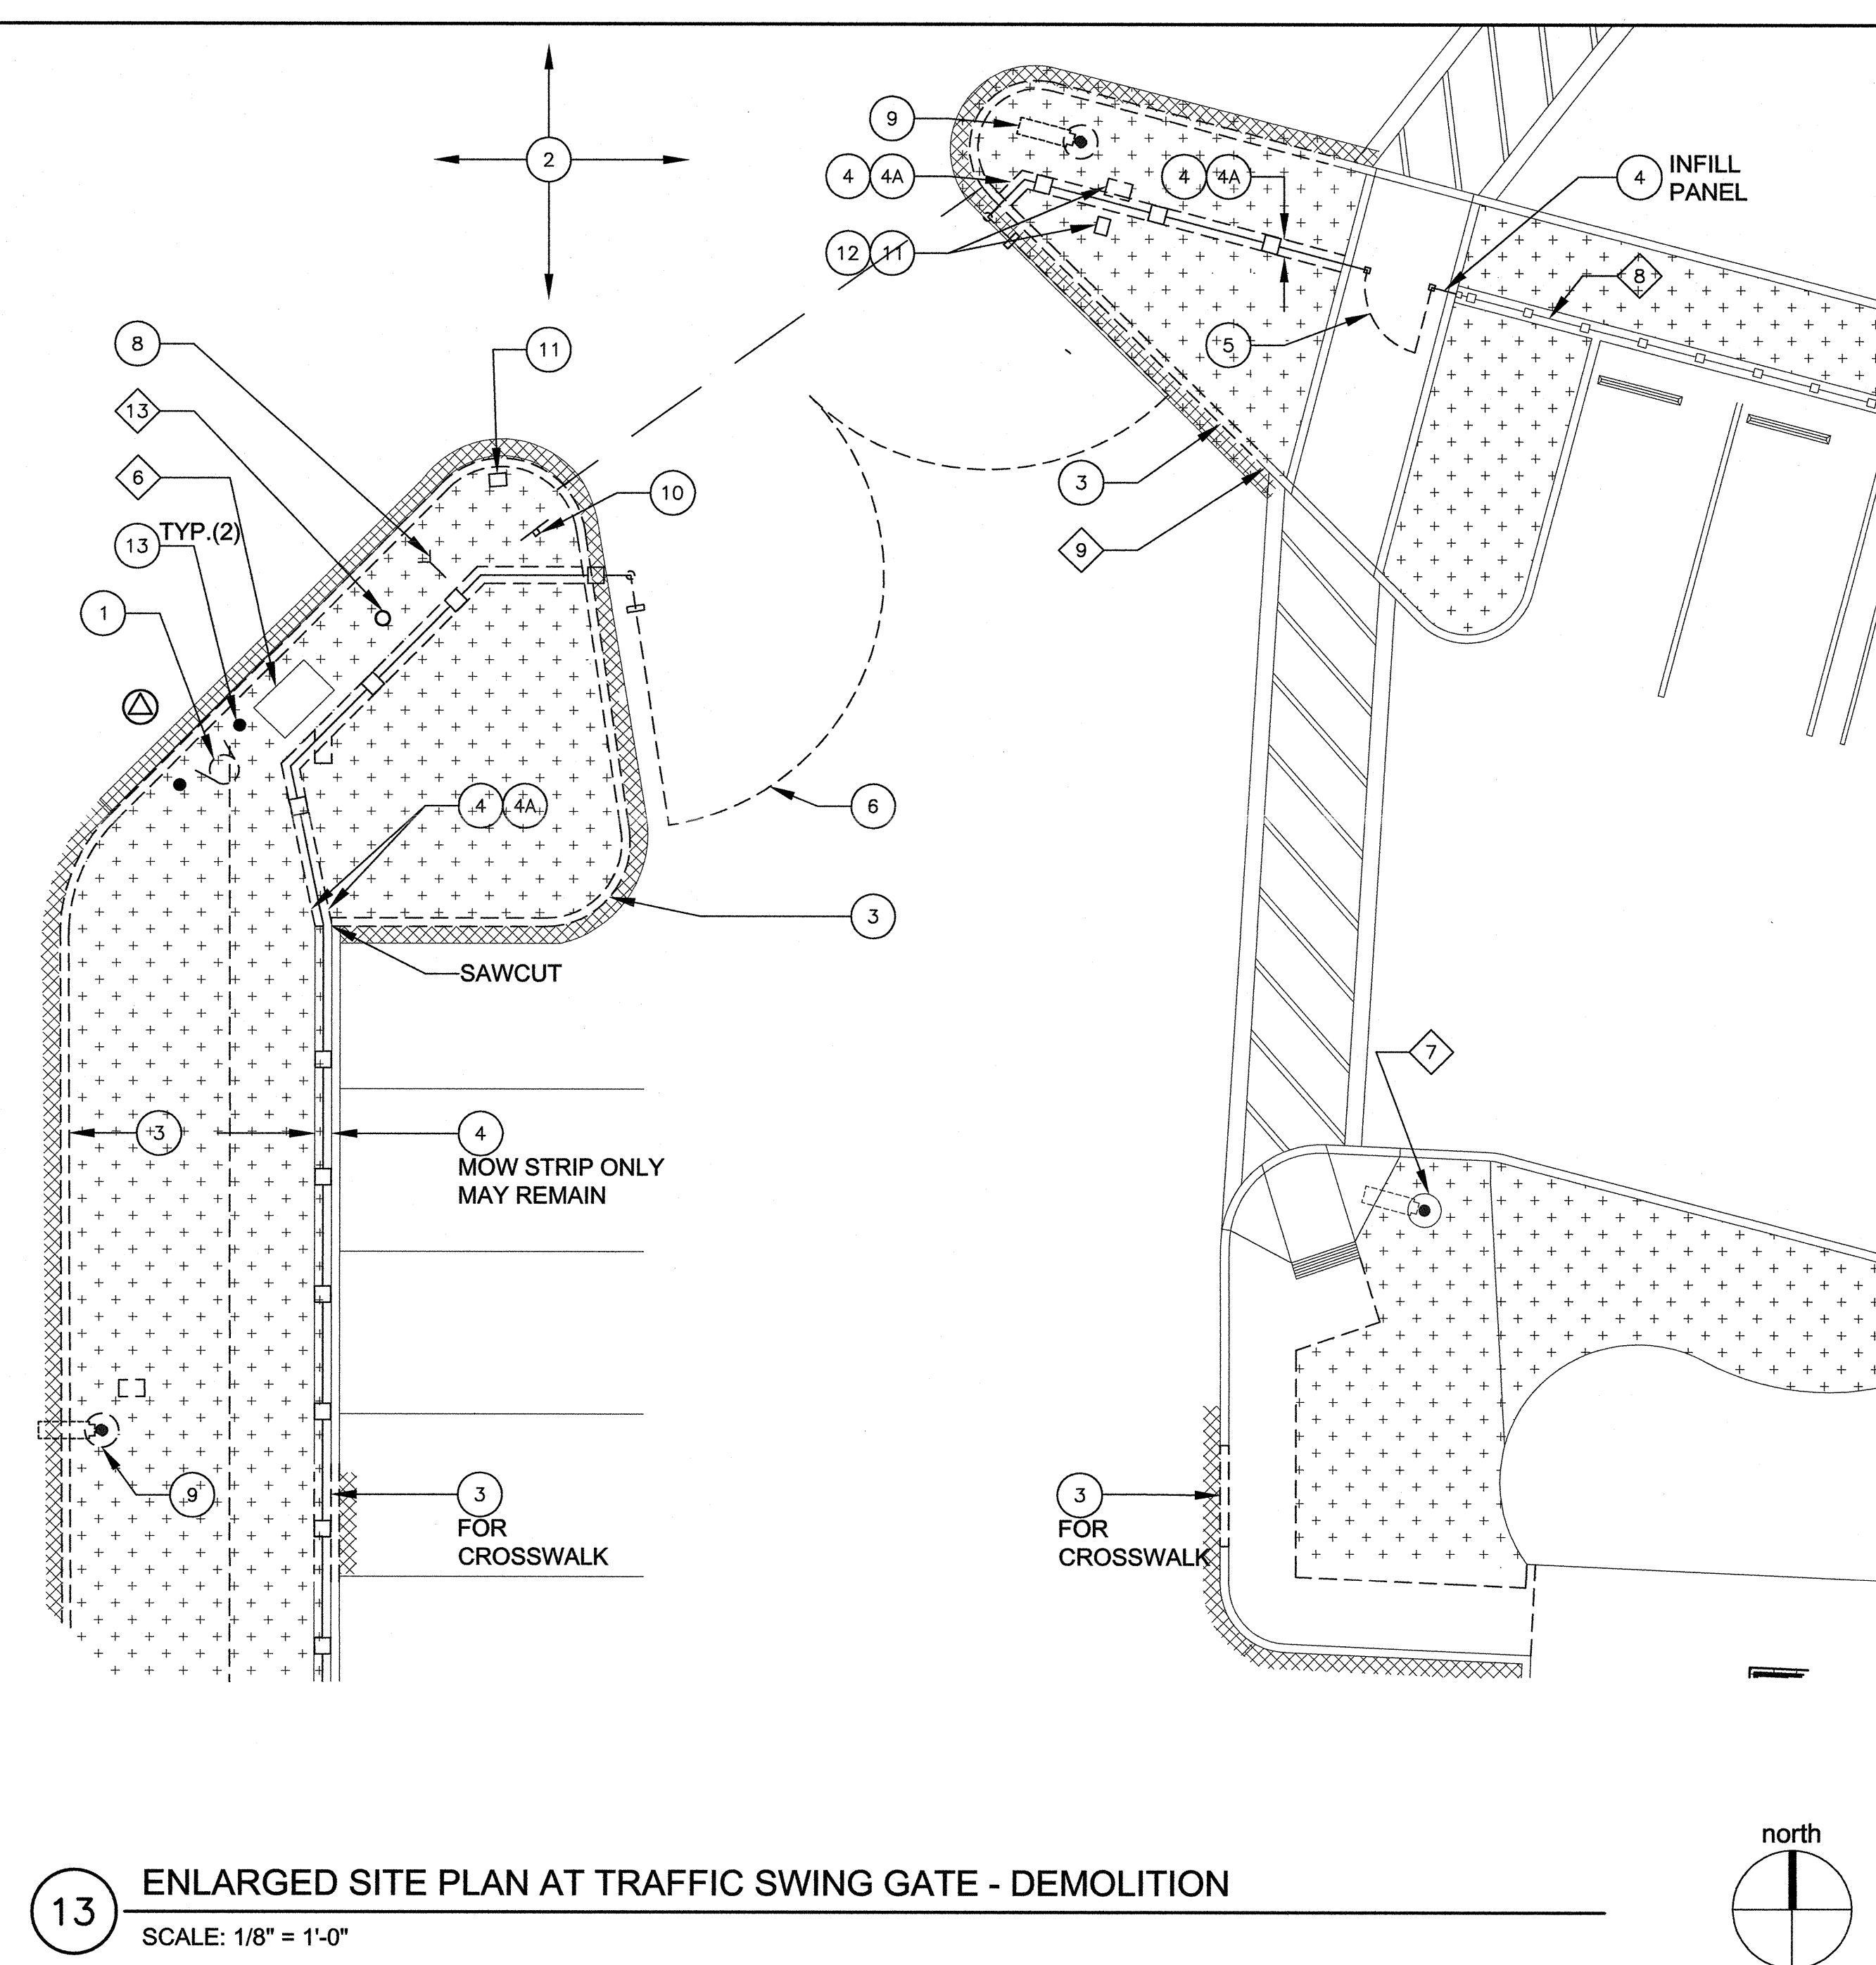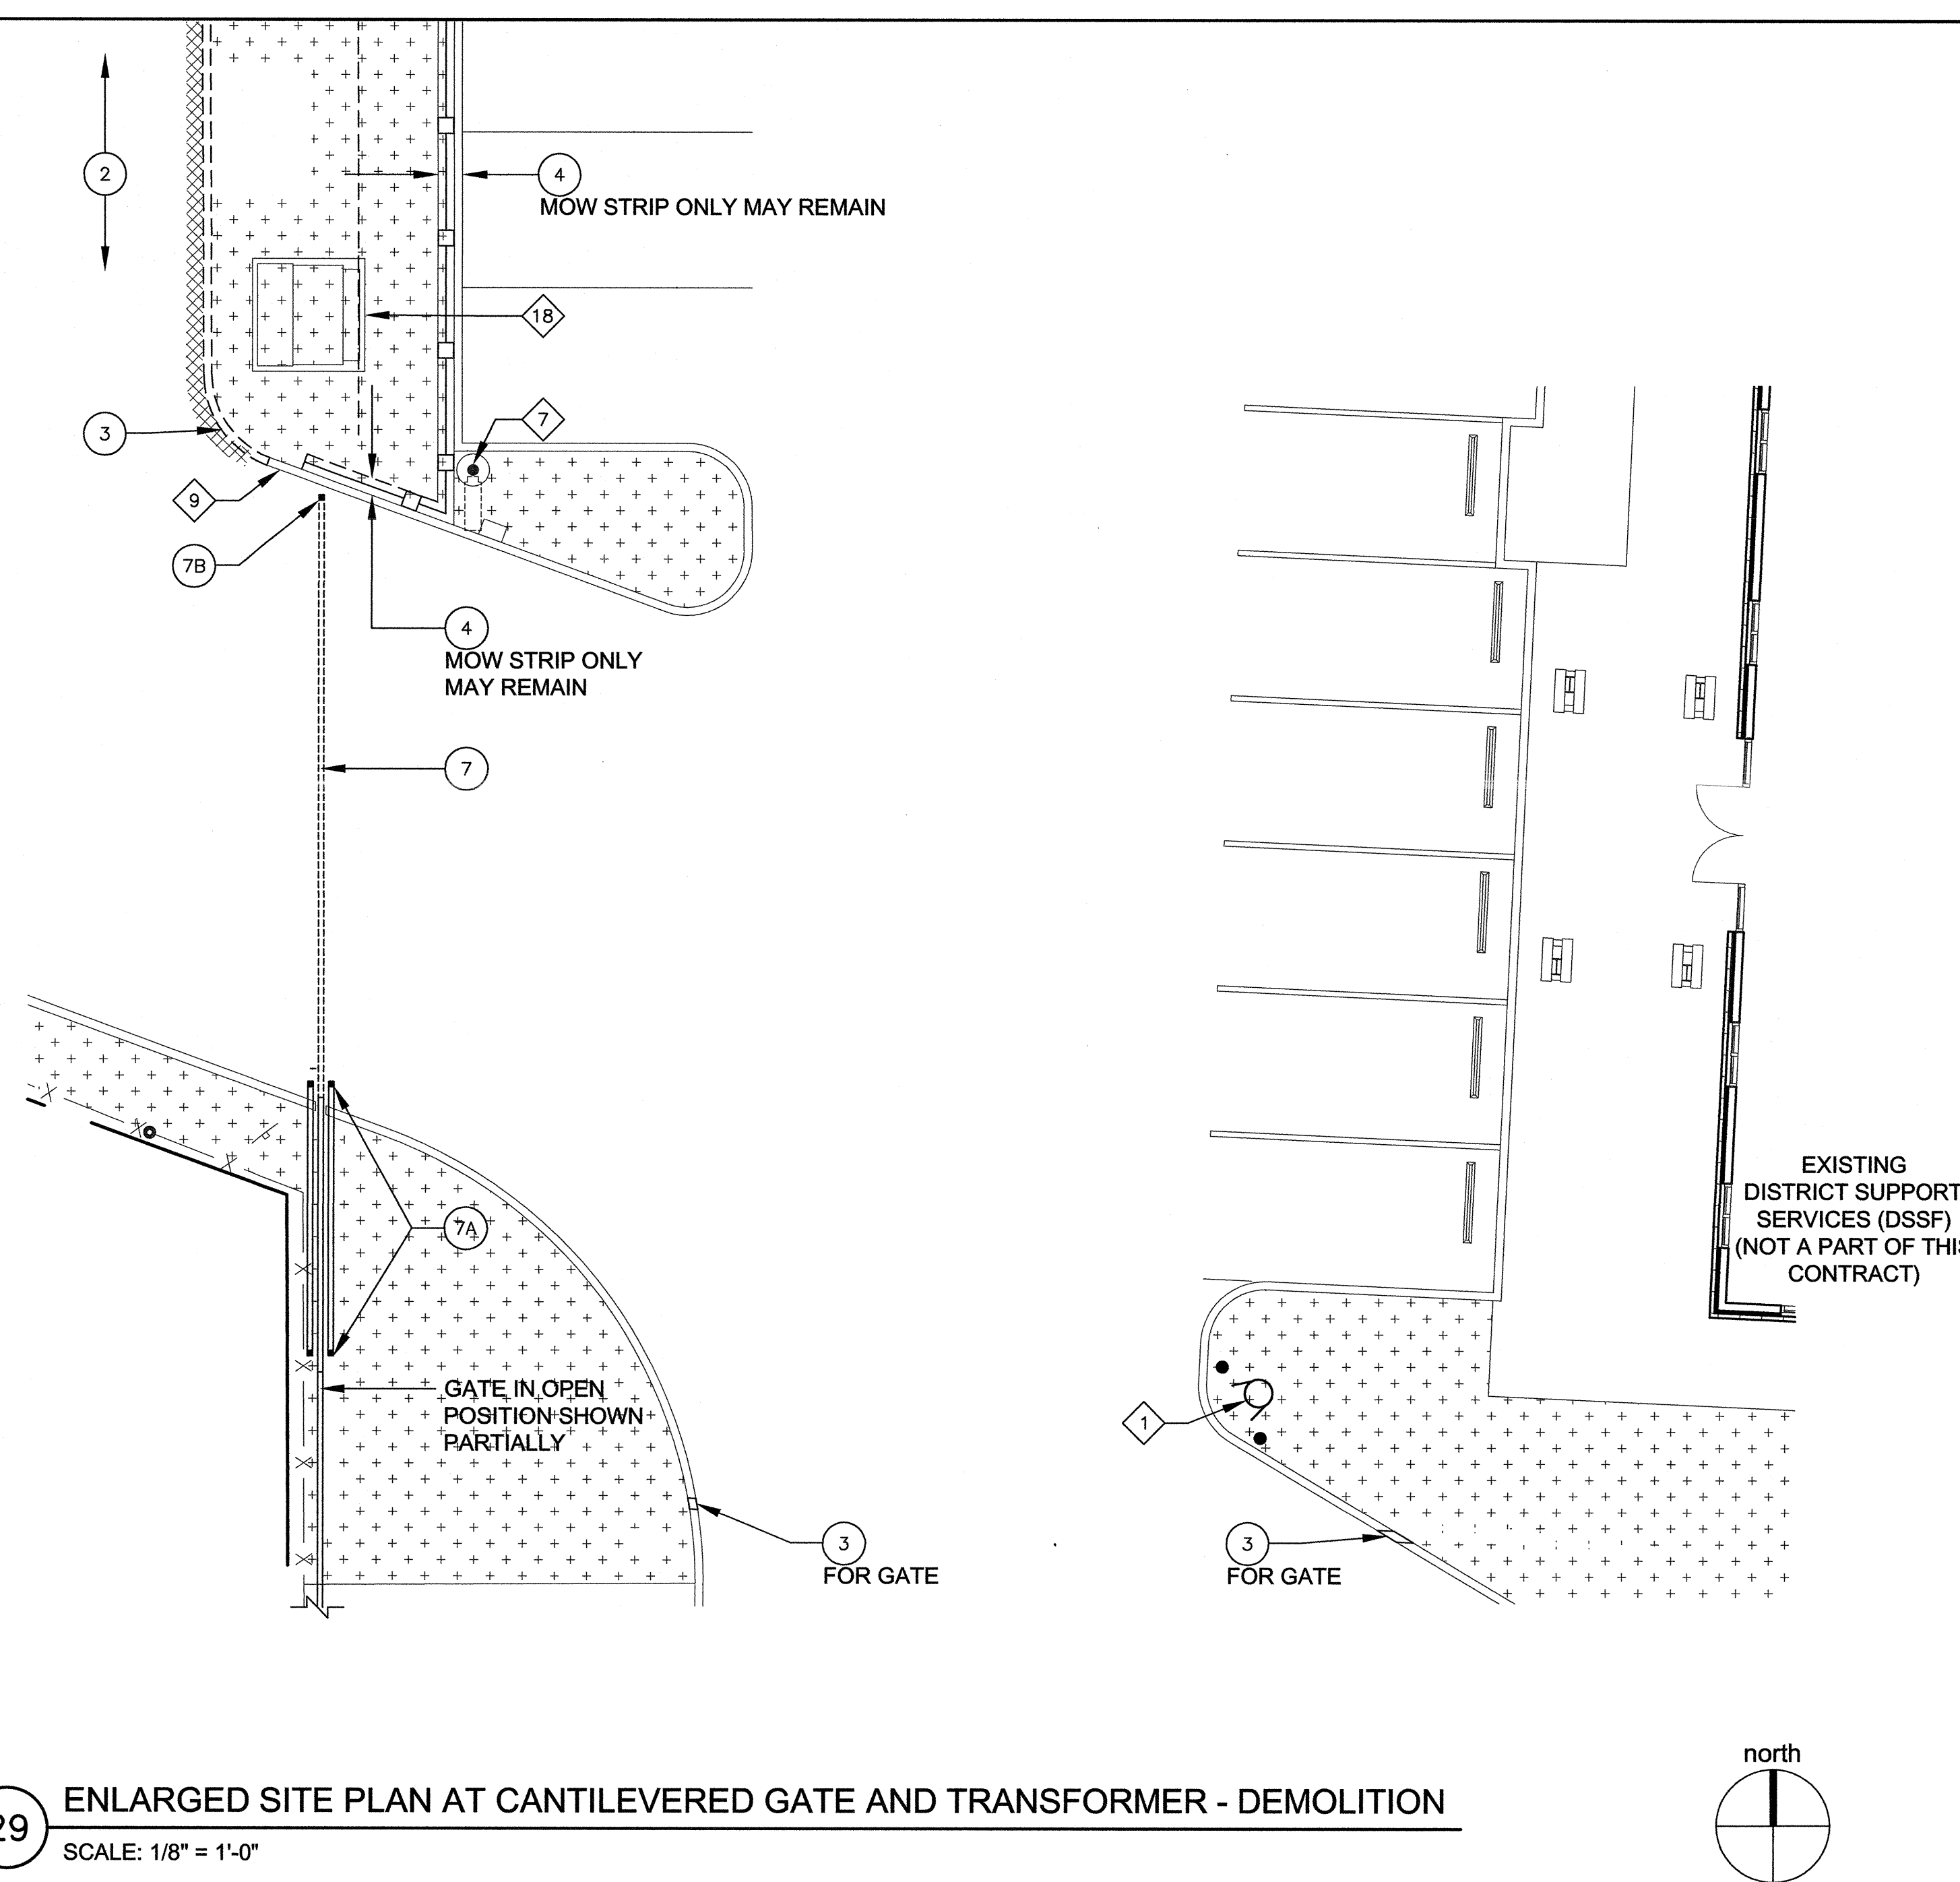

- GENERAL SHEET NOTES:**
- SEE ADDITIONAL ARCHITECTURAL SITE PLANS, CIVIL DRAWINGS AND OTHER TRADES FOR DEMOLITION AND NEW WORK NOT SHOWN HERE.
 - SELECTED EXISTING UTILITIES ARE SHOWN APPROXIMATELY, AND FOR COORDINATION PURPOSES. NOT ALL UTILITIES ARE SHOWN. THE CONTRACTOR SHALL VERIFY ALL EXISTING UTILITIES IN FIELD, AND COORDINATE ALL WORK WITH CIVIL, MECHANICAL, PLUMBING, ELECTRICAL AND LANDSCAPE DOCUMENTS.
- DEMOLITION KEYNOTES:**
THESE KEYNOTES APPLY TO THIS SHEET ONLY.
- CAREFULLY REMOVE FIRE HYDRANT AND UNDERGROUND PIPING AS REQUIRED. STORE HYDRANT AND FITTINGS FOR RELOCATION AND INSTALLATION BY CONTRACTOR.
 - REMOVE A.C. PAVING TO THE EXTENT INDICATED.
 - REMOVE CONCRETE CURB TO THE EXTENT INDICATED.
 - (E) DECORATIVE WIRE FENCING. CAREFULLY REMOVE TO THE EXTENT INDICATED. SALVAGE PANELING FOR REINSTALLATION. DISCARD POSTS ONLY. WHERE MOW STRIP IS NOTED TO REMAIN, REMOVE STEEL POSTS BY SAWING AND GRINDING FLUSH AT THE BASE. PACK POST CAVITY WITH NON-SHRINK GROUT, FLUSH. WHERE MOW STRIP IS NOTED FOR REMOVAL, REMOVE STEEL POSTS AND FOOTINGS TO BELOW FINISH GRADE.
 - REMOVE FENCE MOW STRIP TO THE EXTENT INDICATED.
 - (E) DECORATIVE WIRE GATE. CAREFULLY REMOVE, AND SALVAGE COMPONENTS FOR REINSTALLATION.
 - (E) DECORATIVE WIRE VEHICLE GATE AND IN-GROUND MOUNTED STOPS. CAREFULLY REMOVE ALL COMPONENTS, AND SALVAGE FOR REINSTALLATION.
 - (E) DECORATIVE WIRE CANTILEVER VEHICLE GATE. CAREFULLY REMOVE, AND SALVAGE COMPONENTS FOR REINSTALLATION.
 - (E) SUSPENSION FRAME FOR WIRE CANTILEVER VEHICLE GATE. REMOVE AND DISCARD FRAME, ALL POSTS, AND CONCRETE FOOTINGS. WHERE POSTS OCCUR IN A.C. PAVING, PATCH AND SEAL A.C. SALVAGE COMPONENTS REQUIRED FOR REINSTALLATION.
 - (E) GATE POSTS. REMOVE AND DISCARD ALL ASSOCIATED POSTS AND CONCRETE FOOTINGS. WHERE POSTS OCCUR IN A.C. PAVING, PATCH AND SEAL A.C.
 - REMOVE (E) FDC PER CIVIL DRAWINGS.
 - CAREFULLY REMOVE LIGHT STANDARD AND SALVAGE FOR REINSTALLATION. REMOVE ALL ASSOCIATED ITEMS, SUCH AS PULL BOXES AND JUNCTION BOXES, AS REQUIRED FOR RELOCATION. SEE ELECTRICAL DRAWINGS.
 - (E) ACCESSIBLE PARKING ENTRY SIGN. REMOVE AND DISCARD POST AND FOOTING TO BELOW GRADE. SAVE SIGN ONLY FOR REINSTALLATION, AS SHOWN ON SHEET A0.3, KEYNOTE No. 15.
 - RELOCATE JUNCTION BOX. SEE ELECTRICAL DRAWINGS.
 - RELOCATE PULL BOX. SEE ELECTRICAL DRAWINGS.
 - REMOVE (E) BOLLARDS. STORE FOR REINSTALLATION IF IN SUITABLE CONDITION.

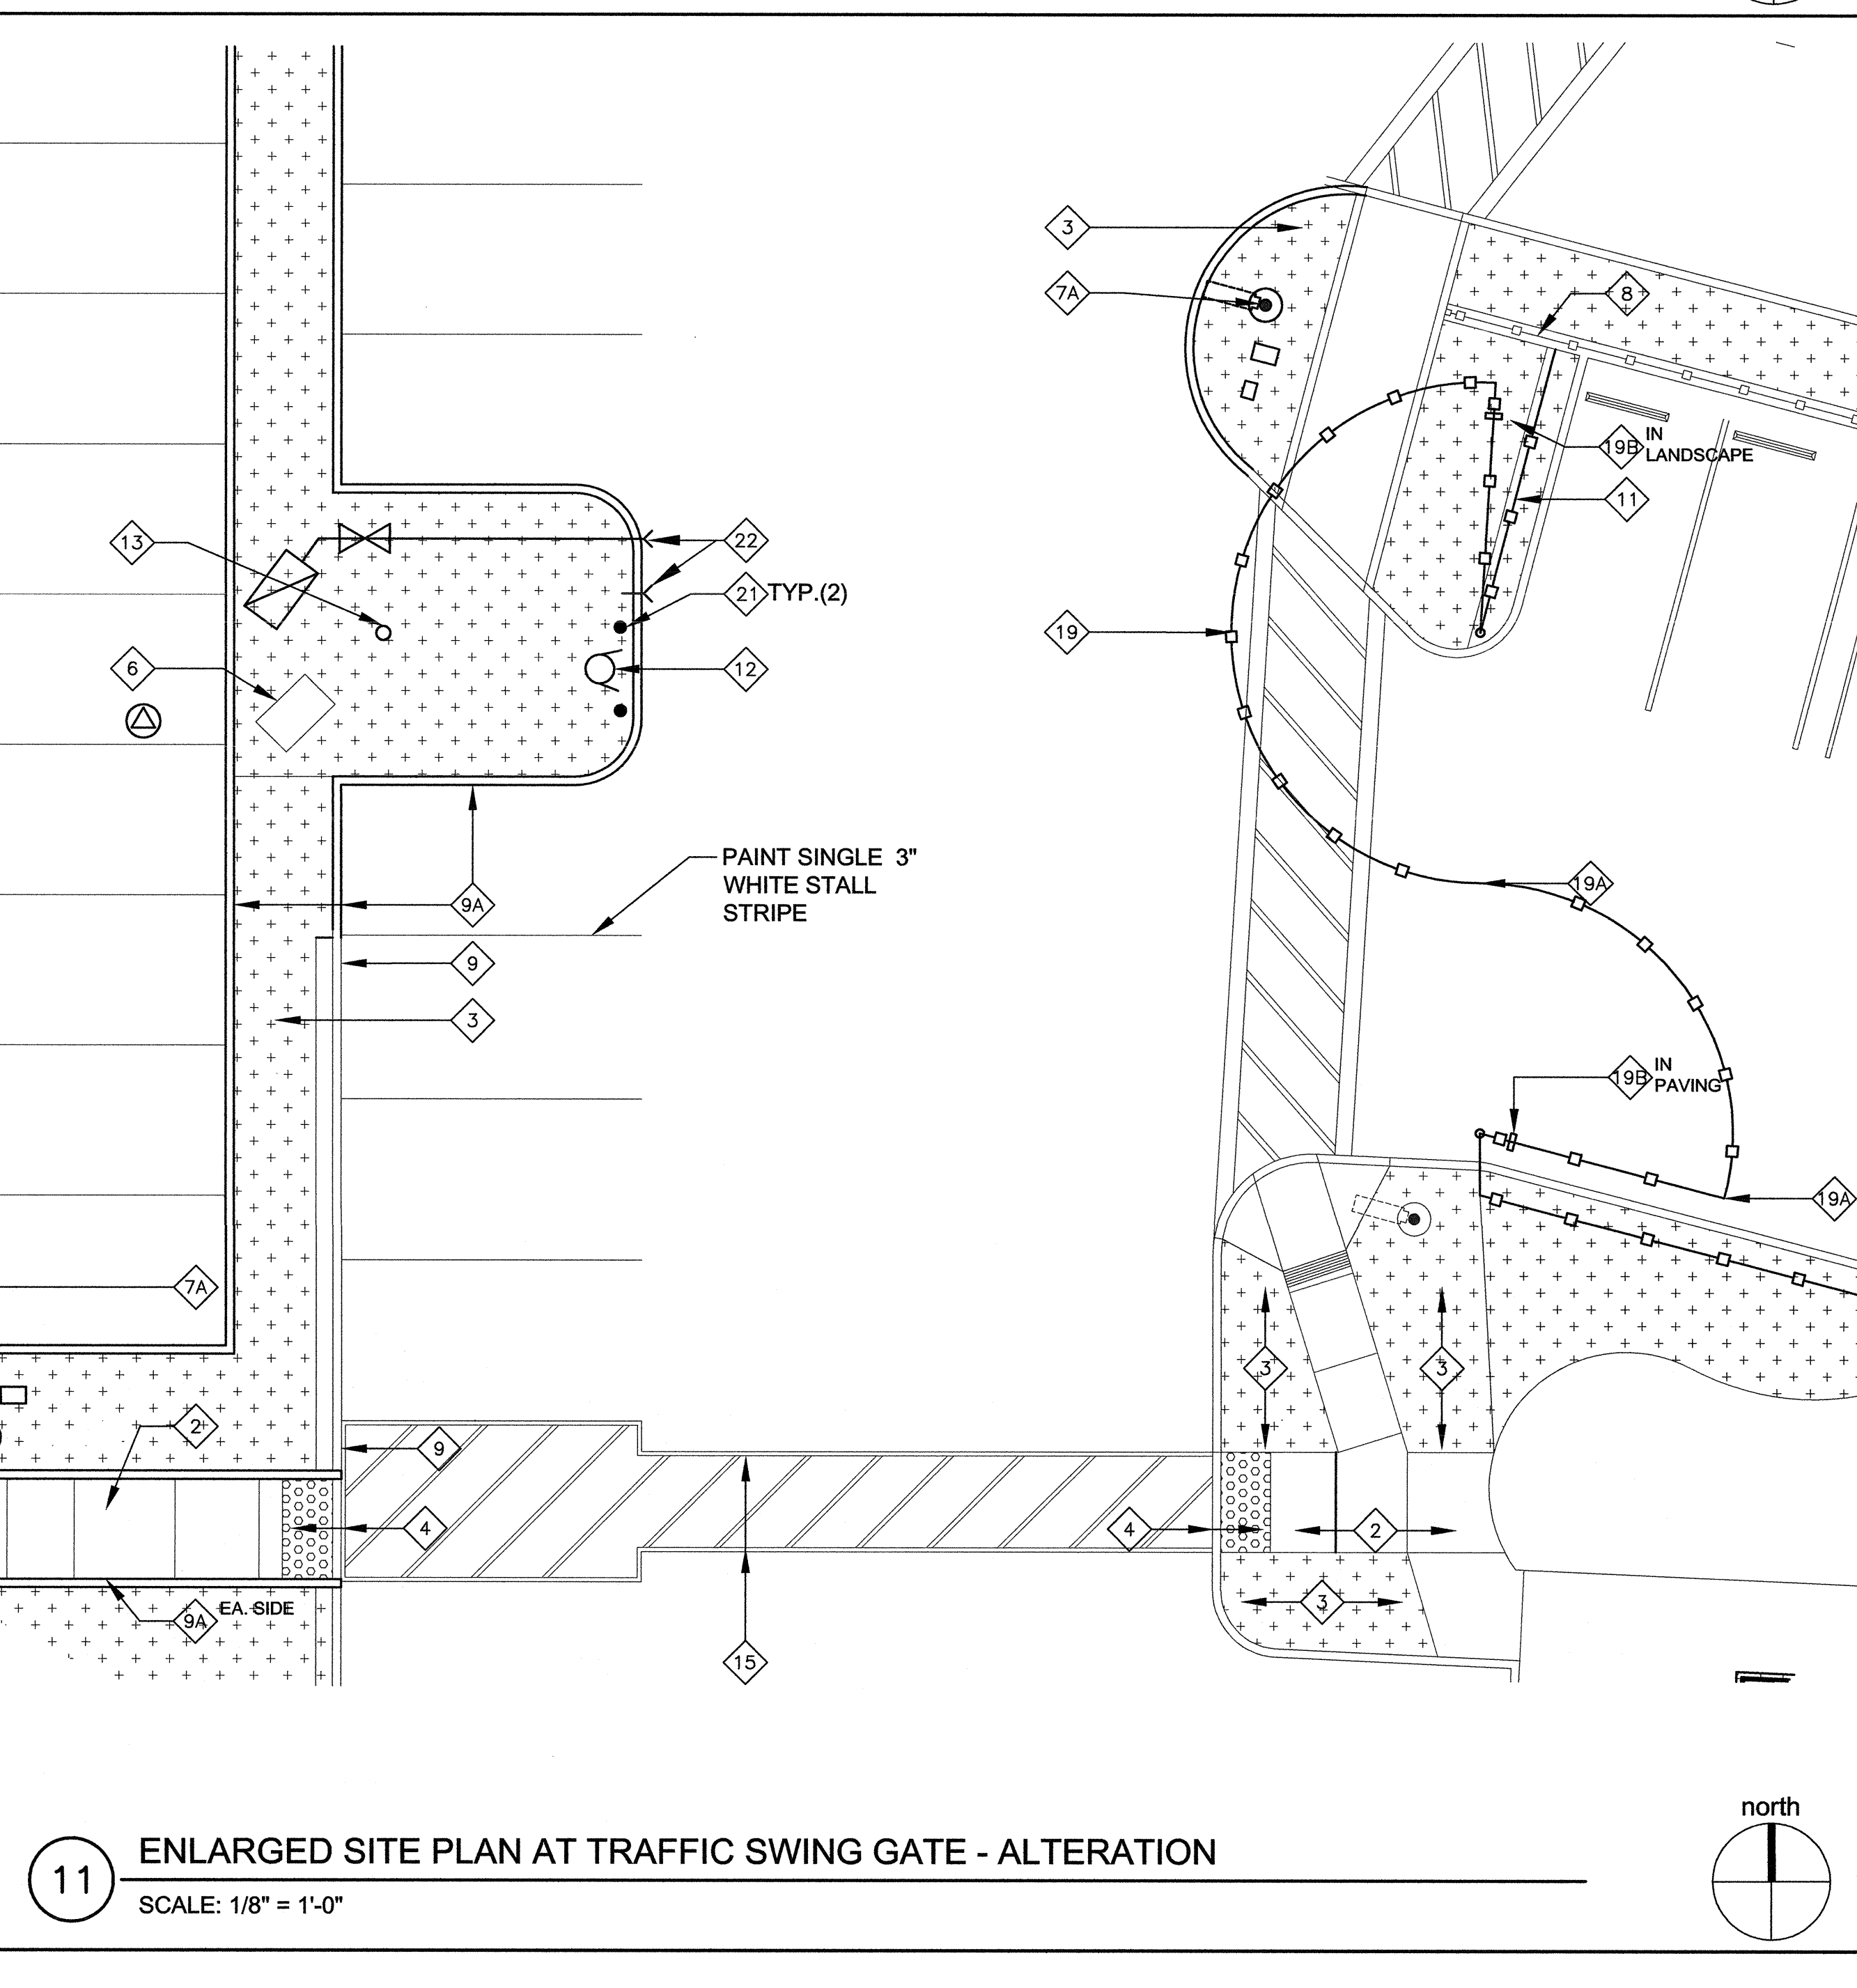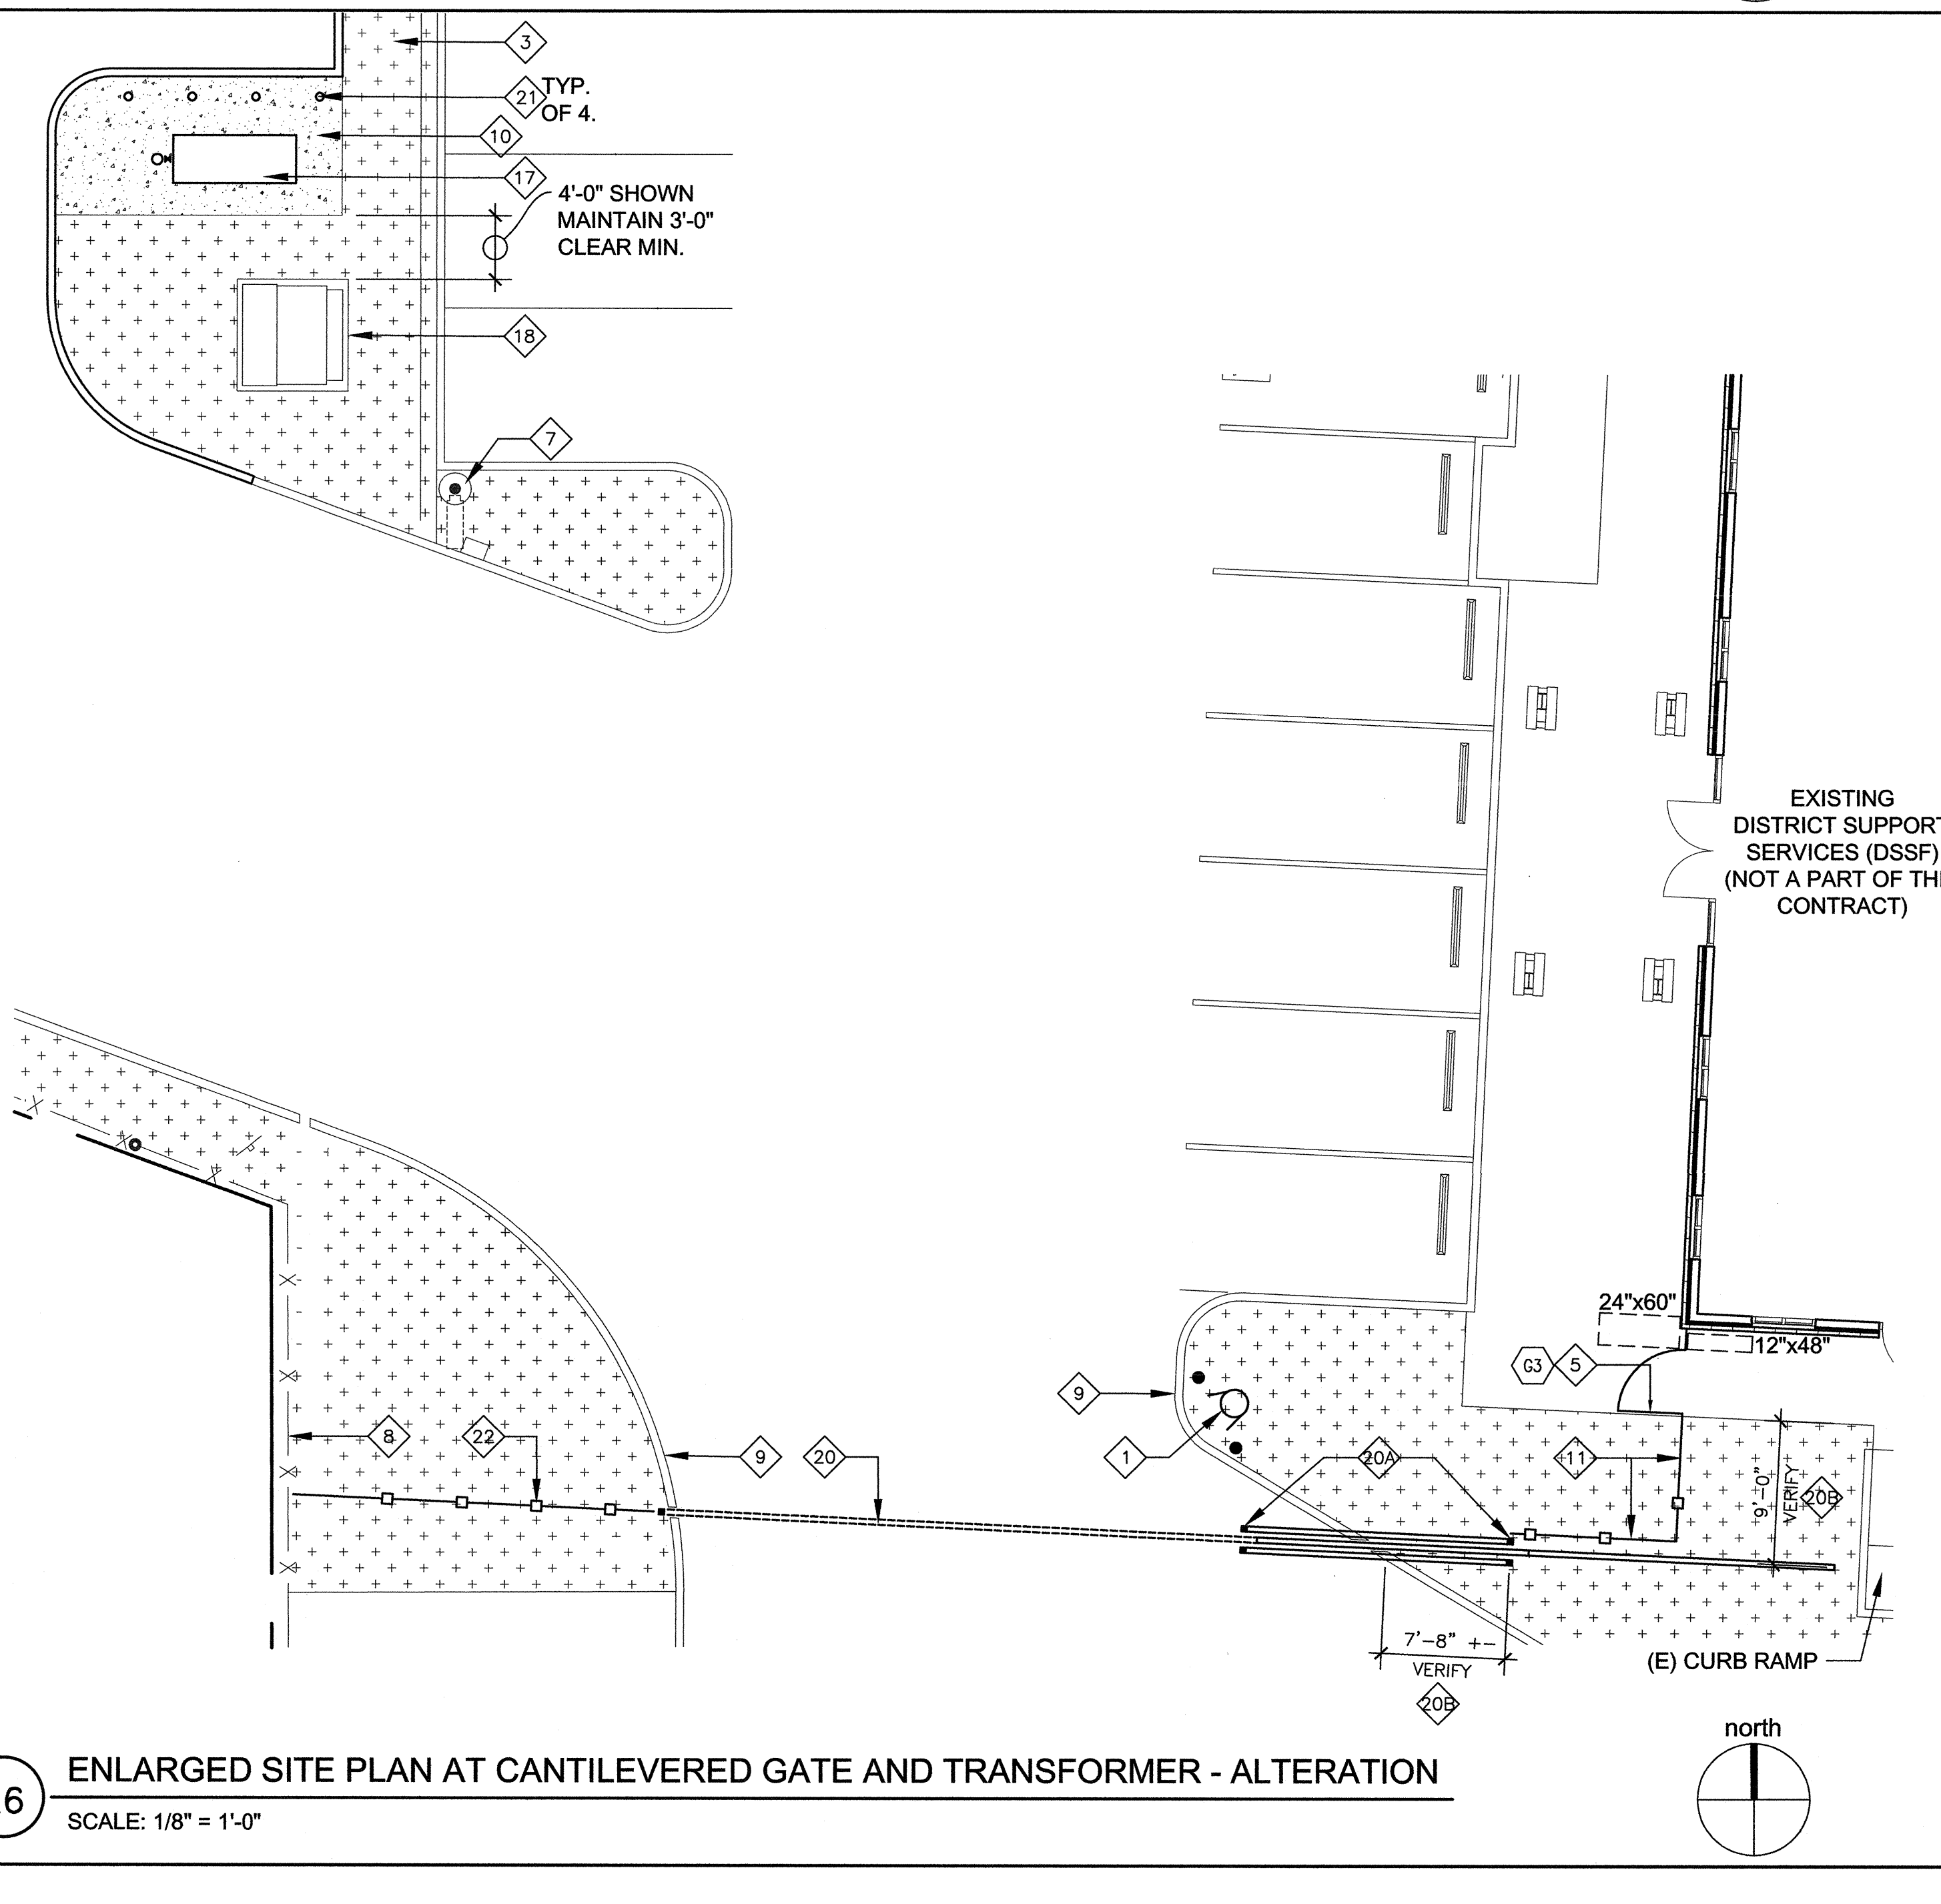

- KEYNOTES:**
THESE KEYNOTES APPLY TO THIS SHEET ONLY.
- (E) FIRE HYDRANT AND BOLLARDS TO REMAIN.
 - PORTLAND CEMENT CONCRETE PAVING - SEE DETAILS ON SHEET C0.1.
 - NEW LANDSCAPE AREA. REWORK ALL IRRIGATION - SEE LANDSCAPE DRAWINGS.
 - NEW DETECTABLE WARNING, CAST IN PLACE TRUNCATED DOMES, 36" WIDE. SEE 29 / A0.5
 - NEW DECORATIVE WIRE GATE, SEE 12 / A0.6 AND DOOR SCHEDULE, SHEET A6.1
 - (E) ELECTRICAL PULL BOX.
 - (E) LIGHT STANDARD TO REMAIN.
 - (E) LIGHT STANDARD IN NEW LOCATION. SEE ELECTRICAL.
 - (E) FENCE TO REMAIN.
 - (E) CONCRETE CURB TO REMAIN.
 - (N) CONCRETE CURB.
 - MIN. 4" THICK CONCRETE PAD AT FULL EXTENT OF GAS METER EQUIPMENT.
 - NEW DECORATIVE WIRE FENCING, SEE 15 / A0.6
 - (E) FIRE HYDRANT IN NEW LOCATION.
 - (E) POST INDICATOR VALVE, TO REMAIN.
 - (E) FIRE DEPARTMENT CONNECTION, TO REMAIN.
 - PAINT WHITE CROSSWALK STRIPING ON (E) A.C.
 - EXISTING TRANSFORMER AND CONCRETE PAD, TO REMAIN. SEE ELECTRICAL DRAWINGS FOR ADDITIONAL WORK.
 - NEW GAS METER ASSEMBLY ON CONC. PAD WITH CAGE ALL SIDES AND TOP. SEE PLUMBING DRAWINGS.
 - EXISTING TRANSFORMER AND PAD TO REMAIN.
 - INSTALL EXISTING DECORATIVE WIRE VEHICLE SWING GATE IN NEW LOCATION. RELOCATE ALL ASSOCIATED ITEMS AS REQUIRED. SEE DETAIL 14 / A0.6
 - RECEIVER PIPE FOR CANE BOLT, IN A.C. PAVING
 - GATE HOLD OPEN DEVICE. REINSTALL IN CONCRETE PEDESTAL.
 - INSTALL EXISTING DECORATIVE WIRE VEHICLE CANTILEVER GATE IN NEW LOCATION. SEE DETAIL 13 / A0.6
 - RELOCATE ALL ASSOCIATED ITEMS, SUCH AS PULL BOXES AND JUNCTION BOXES AS REQUIRED, AND PER ELECTRICAL DRAWINGS.
 - SUSPENSION FRAME FOR CANTILEVER VEHICLE GATE. PROVIDE NEW FRAME MATCHING EXISTING BY SAME MANUFACTURER. INSTALL IN DRILLED CONCRETE PIER FOOTINGS PER MANUFACTURER. EXISTING FENCE SYSTEM IS ELITE FENCE Inc., MODEL ZIPTRACK DUAL TRACK.
 - VERIFY OPERATIONAL CLEARANCES OF EXISTING GATE ASSEMBLY. LOCATE TO CLEAR ALL EXISTING ITEMS AND FULLY OPERATE WITH THE MAXIMUM PRACTICAL OPENING FOR TRAFFIC.
 - PROVIDE NEW BOLLARDS IN CONCRETE FOOTINGS - SEE DETAIL 3/C6.1.
 - NEW FIRE DEPARTMENT CONNECTIONS - SEE CIVIL DRAWINGS.

Dry Creek Joint Elementary School District
District Education Center

8849 Cook Riolo Road, Roseville, CA 95747
Dry Creek Joint Elementary School District

FILE NO. 31-15
IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-115456
AC: TM FLS: WLS SS: BL
DATE: 1/31/19
DIVISION OF THE STATE ARCHITECT
revision date: by:

CONSULTANT

nacht&lewis
600 O Street, Suite 100
Sacramento, CA 95811
www.nachtlewis.com
916.329.4000

ARCHITECT

INITIAL BOX			
NO.	DWG BY	DATE	REVIEWED

REVISIONS			
NO.	DESCRIPTION	DATE	REV'D
	100% design development	7/6/16	
	75% construction documents	9/20/16	
	DSA submittal	12/31/16	
	DSA approval	02/23/17	

DATE February 23, 2017
JOB NO. Y1538.00
SHEET TITLE
Enlarged Site Plans
SHEET NO.
A0.4
SHEET ____ OF ____ TOTAL

PHOTO 30

- SIGN, RELOCATE PER PLANS
- P.I.V. AND FIRE DEPT CONNECTION, SEE CIVIL DRAWINGS

PHOTO 25

- LIGHT STANDARD, RELOCATE PER PLANS, REMOVE FOOTING.
- FENCE, REMOVE PER PLANS
- TRAFFIC SWING GATE, RELOCATE PER PLANS

PHOTO 29

- FENCE, REMOVE PER PLANS
- FIRE HYDRANT, RELOCATE PER PLANS

PHOTO 28

- TRAFFIC SWING GATE, RELOCATE PER PLANS
- LIGHT STANDARD, RELOCATE PER PLANS, REMOVE FOOTING.
- FENCE AND GATE, REMOVE PER PLANS

PHOTO 23

- TRAFFIC SWING GATE, RELOCATE PER PLANS
- REMOVE POST TO BELOW GRADE

KEY PLAN TO PHOTOS
NOT TO SCALE














EXISTING DISTRICT SUPPORT SERVICES FACILITY

23 25 29 30 18 19 20


north




25 PHOTO

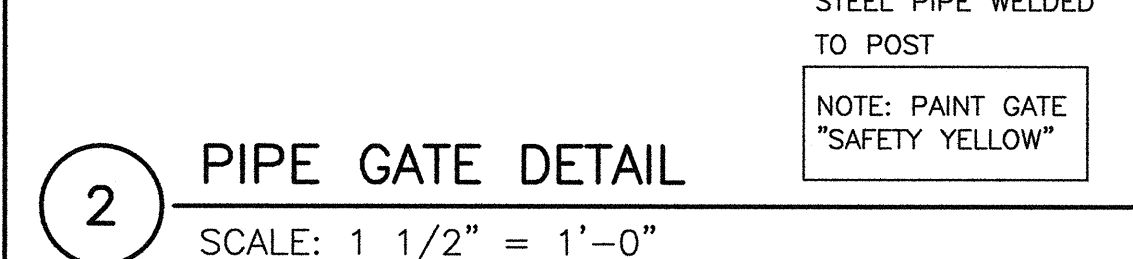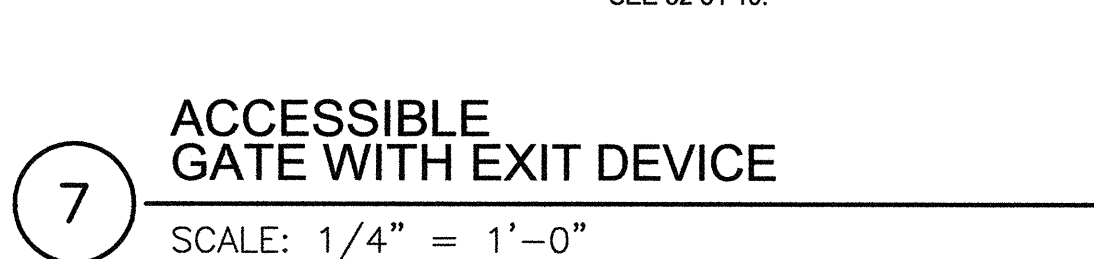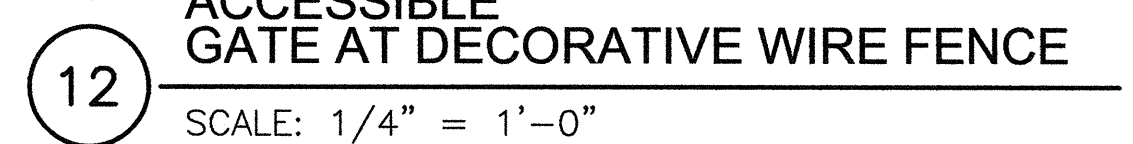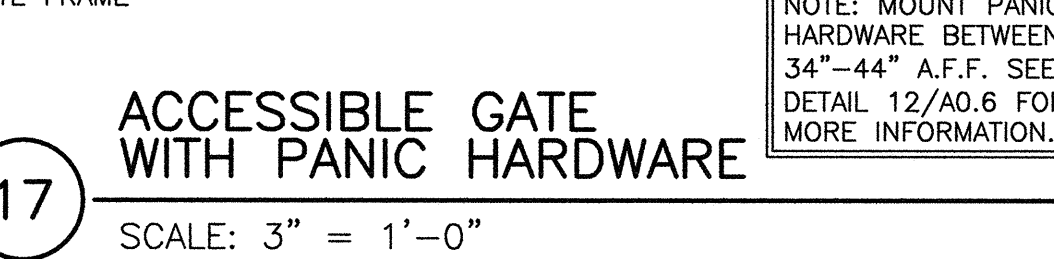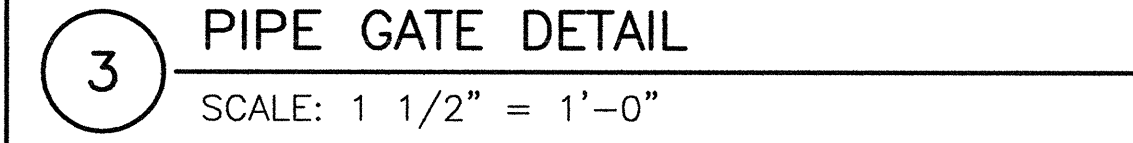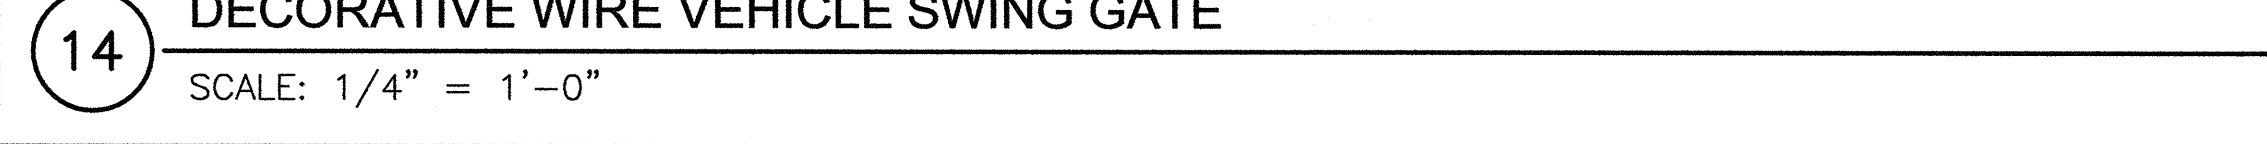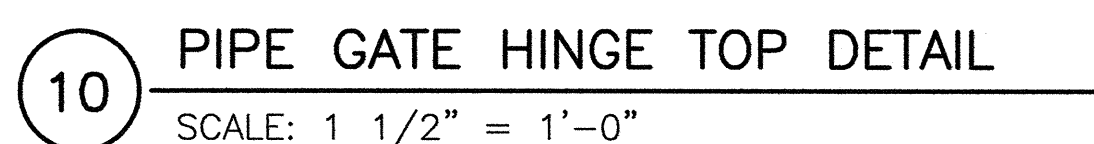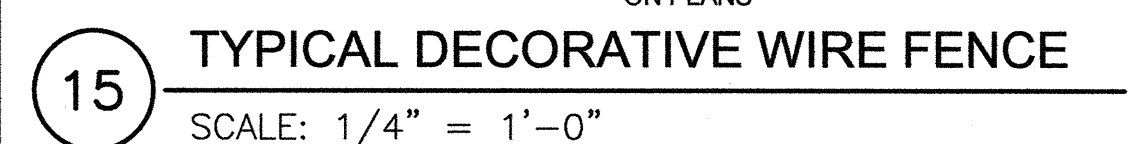


ONE AND ONE-HALF INCH = ONE FOOT
ONE INCH = ONE FOOT
THREE-QUARTERS INCH = ONE FOOT
ONE-HALF INCH = ONE FOOT
ONE-QUARTER INCH = ONE FOOT
ONE-EIGHTH INCH = ONE FOOT
ONE-SIXTEENTH INCH = ONE FOOT
ONE INCH = TWENTY FEET

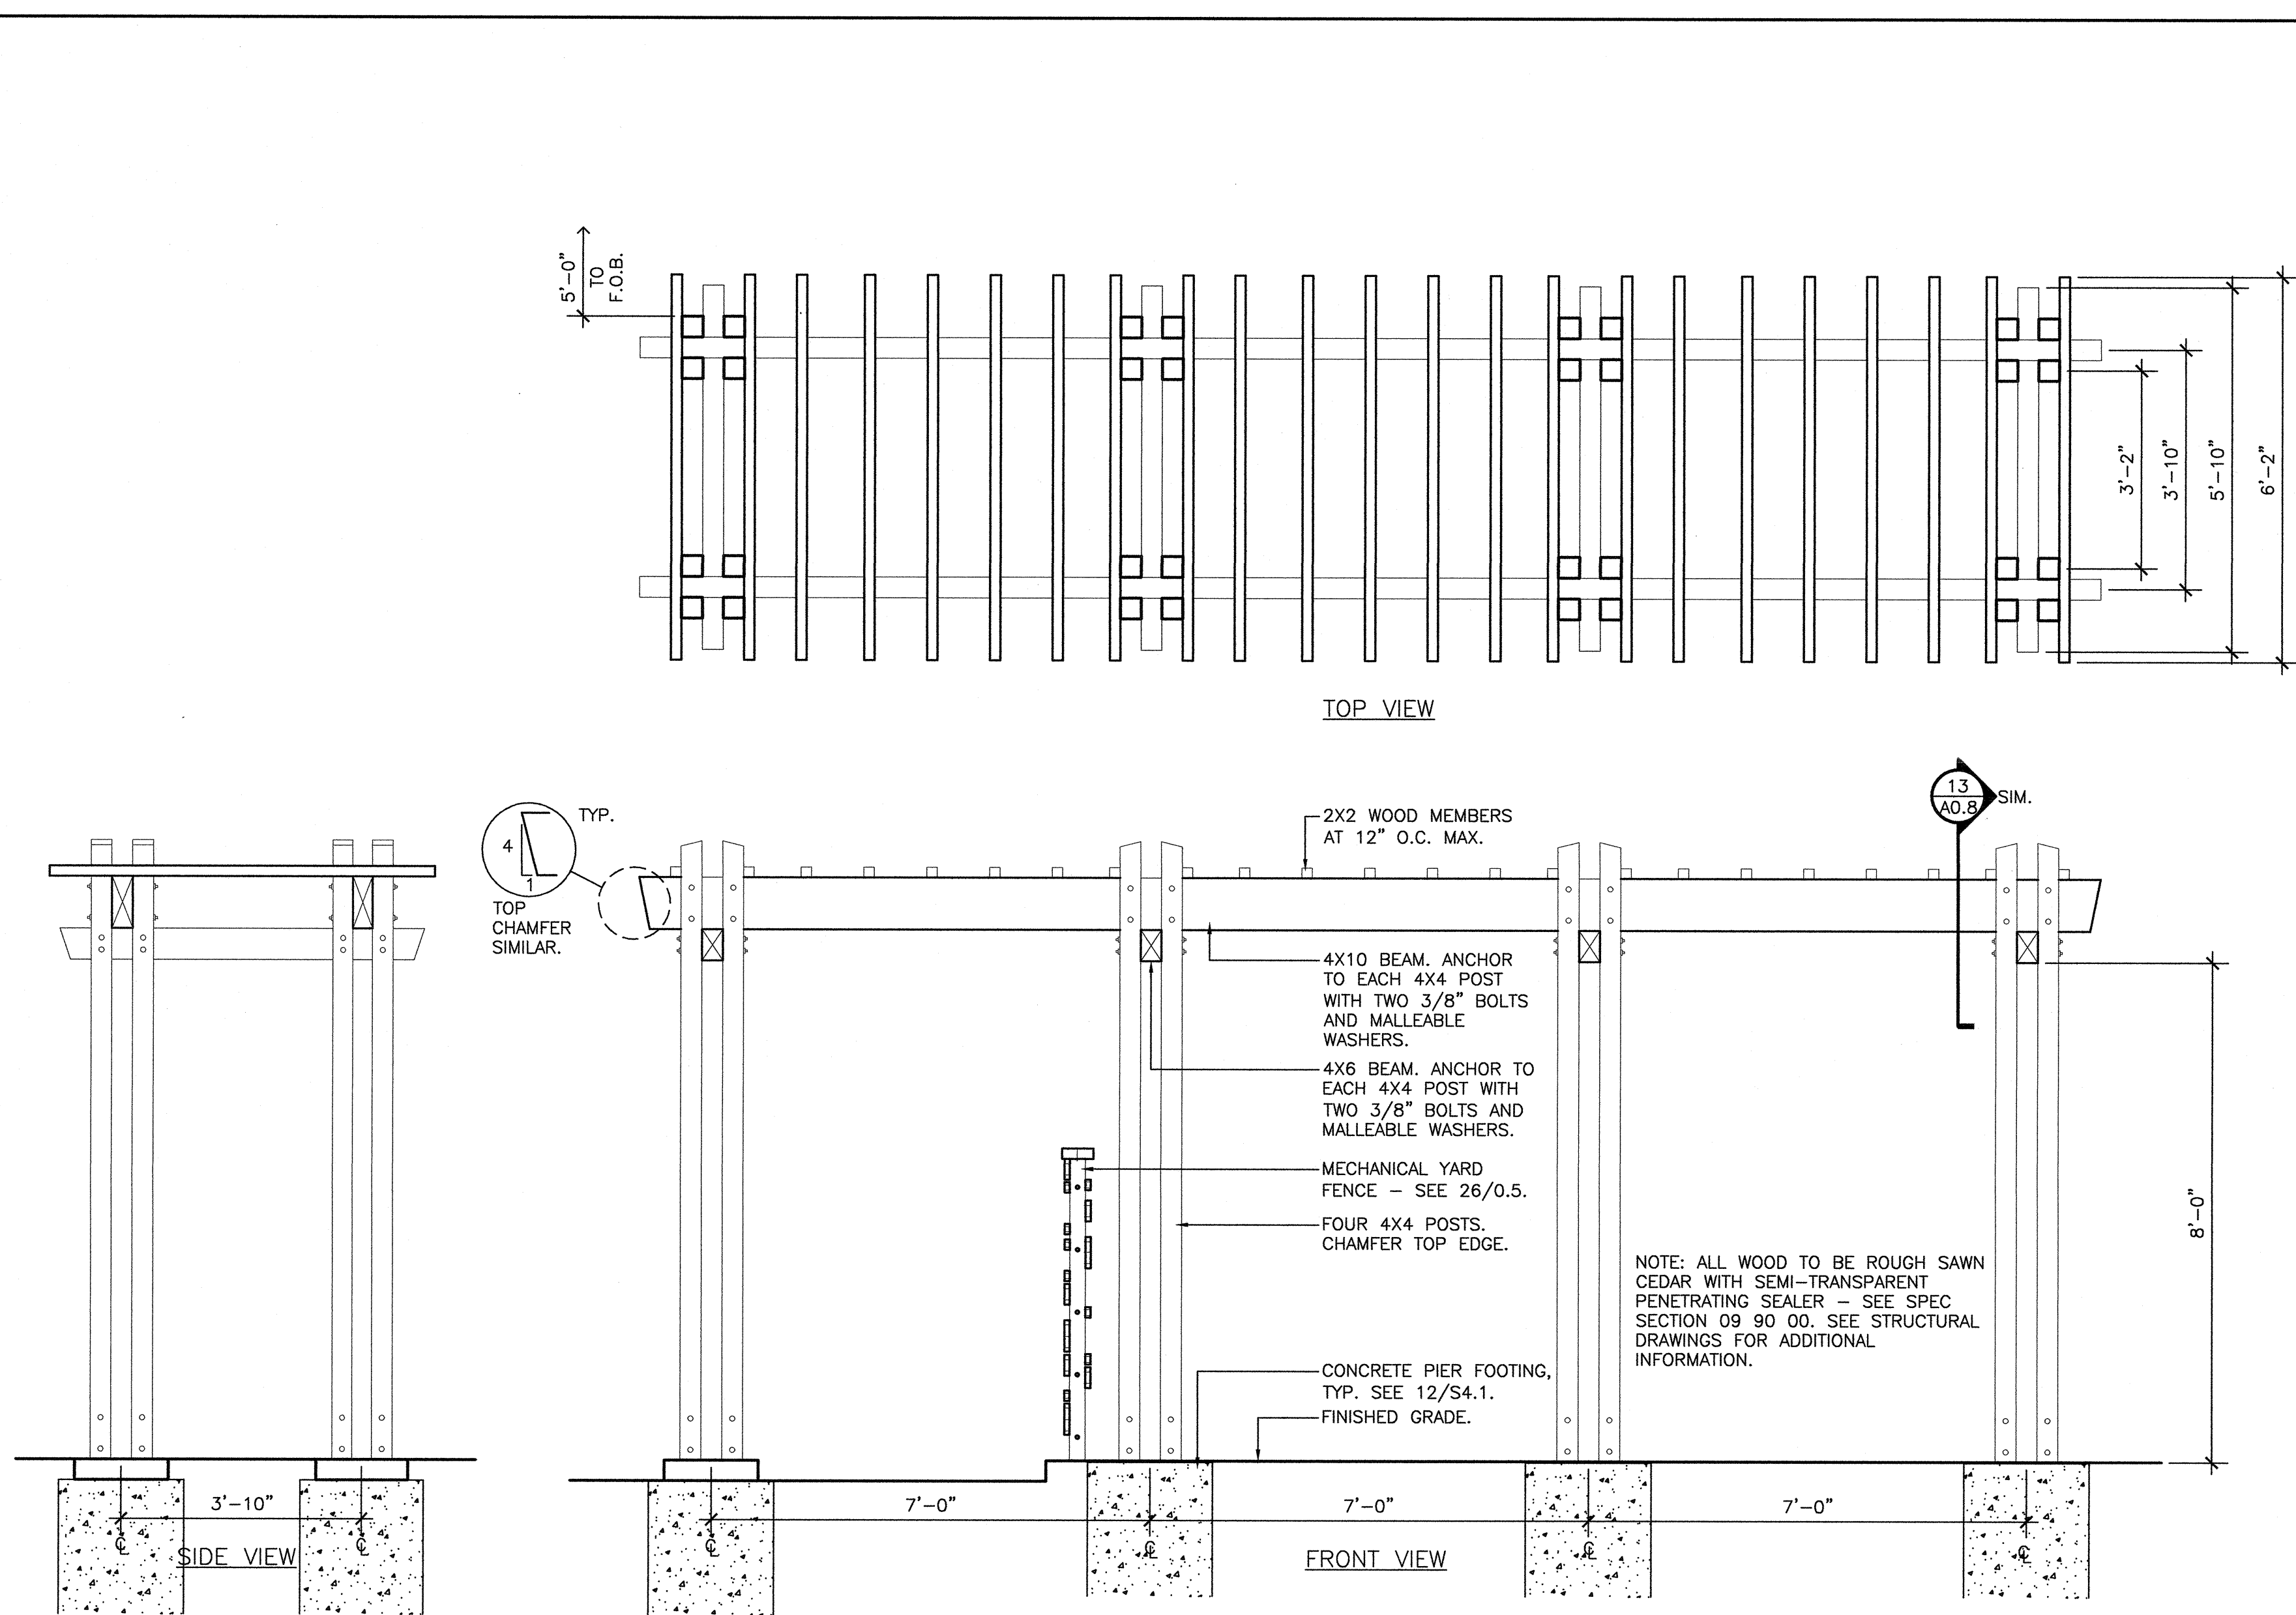

2 PERGOLA— WEST MECH. SERVICE YARD (TYP. OF TWO)
SCALE: 1/2" = 1'-0"

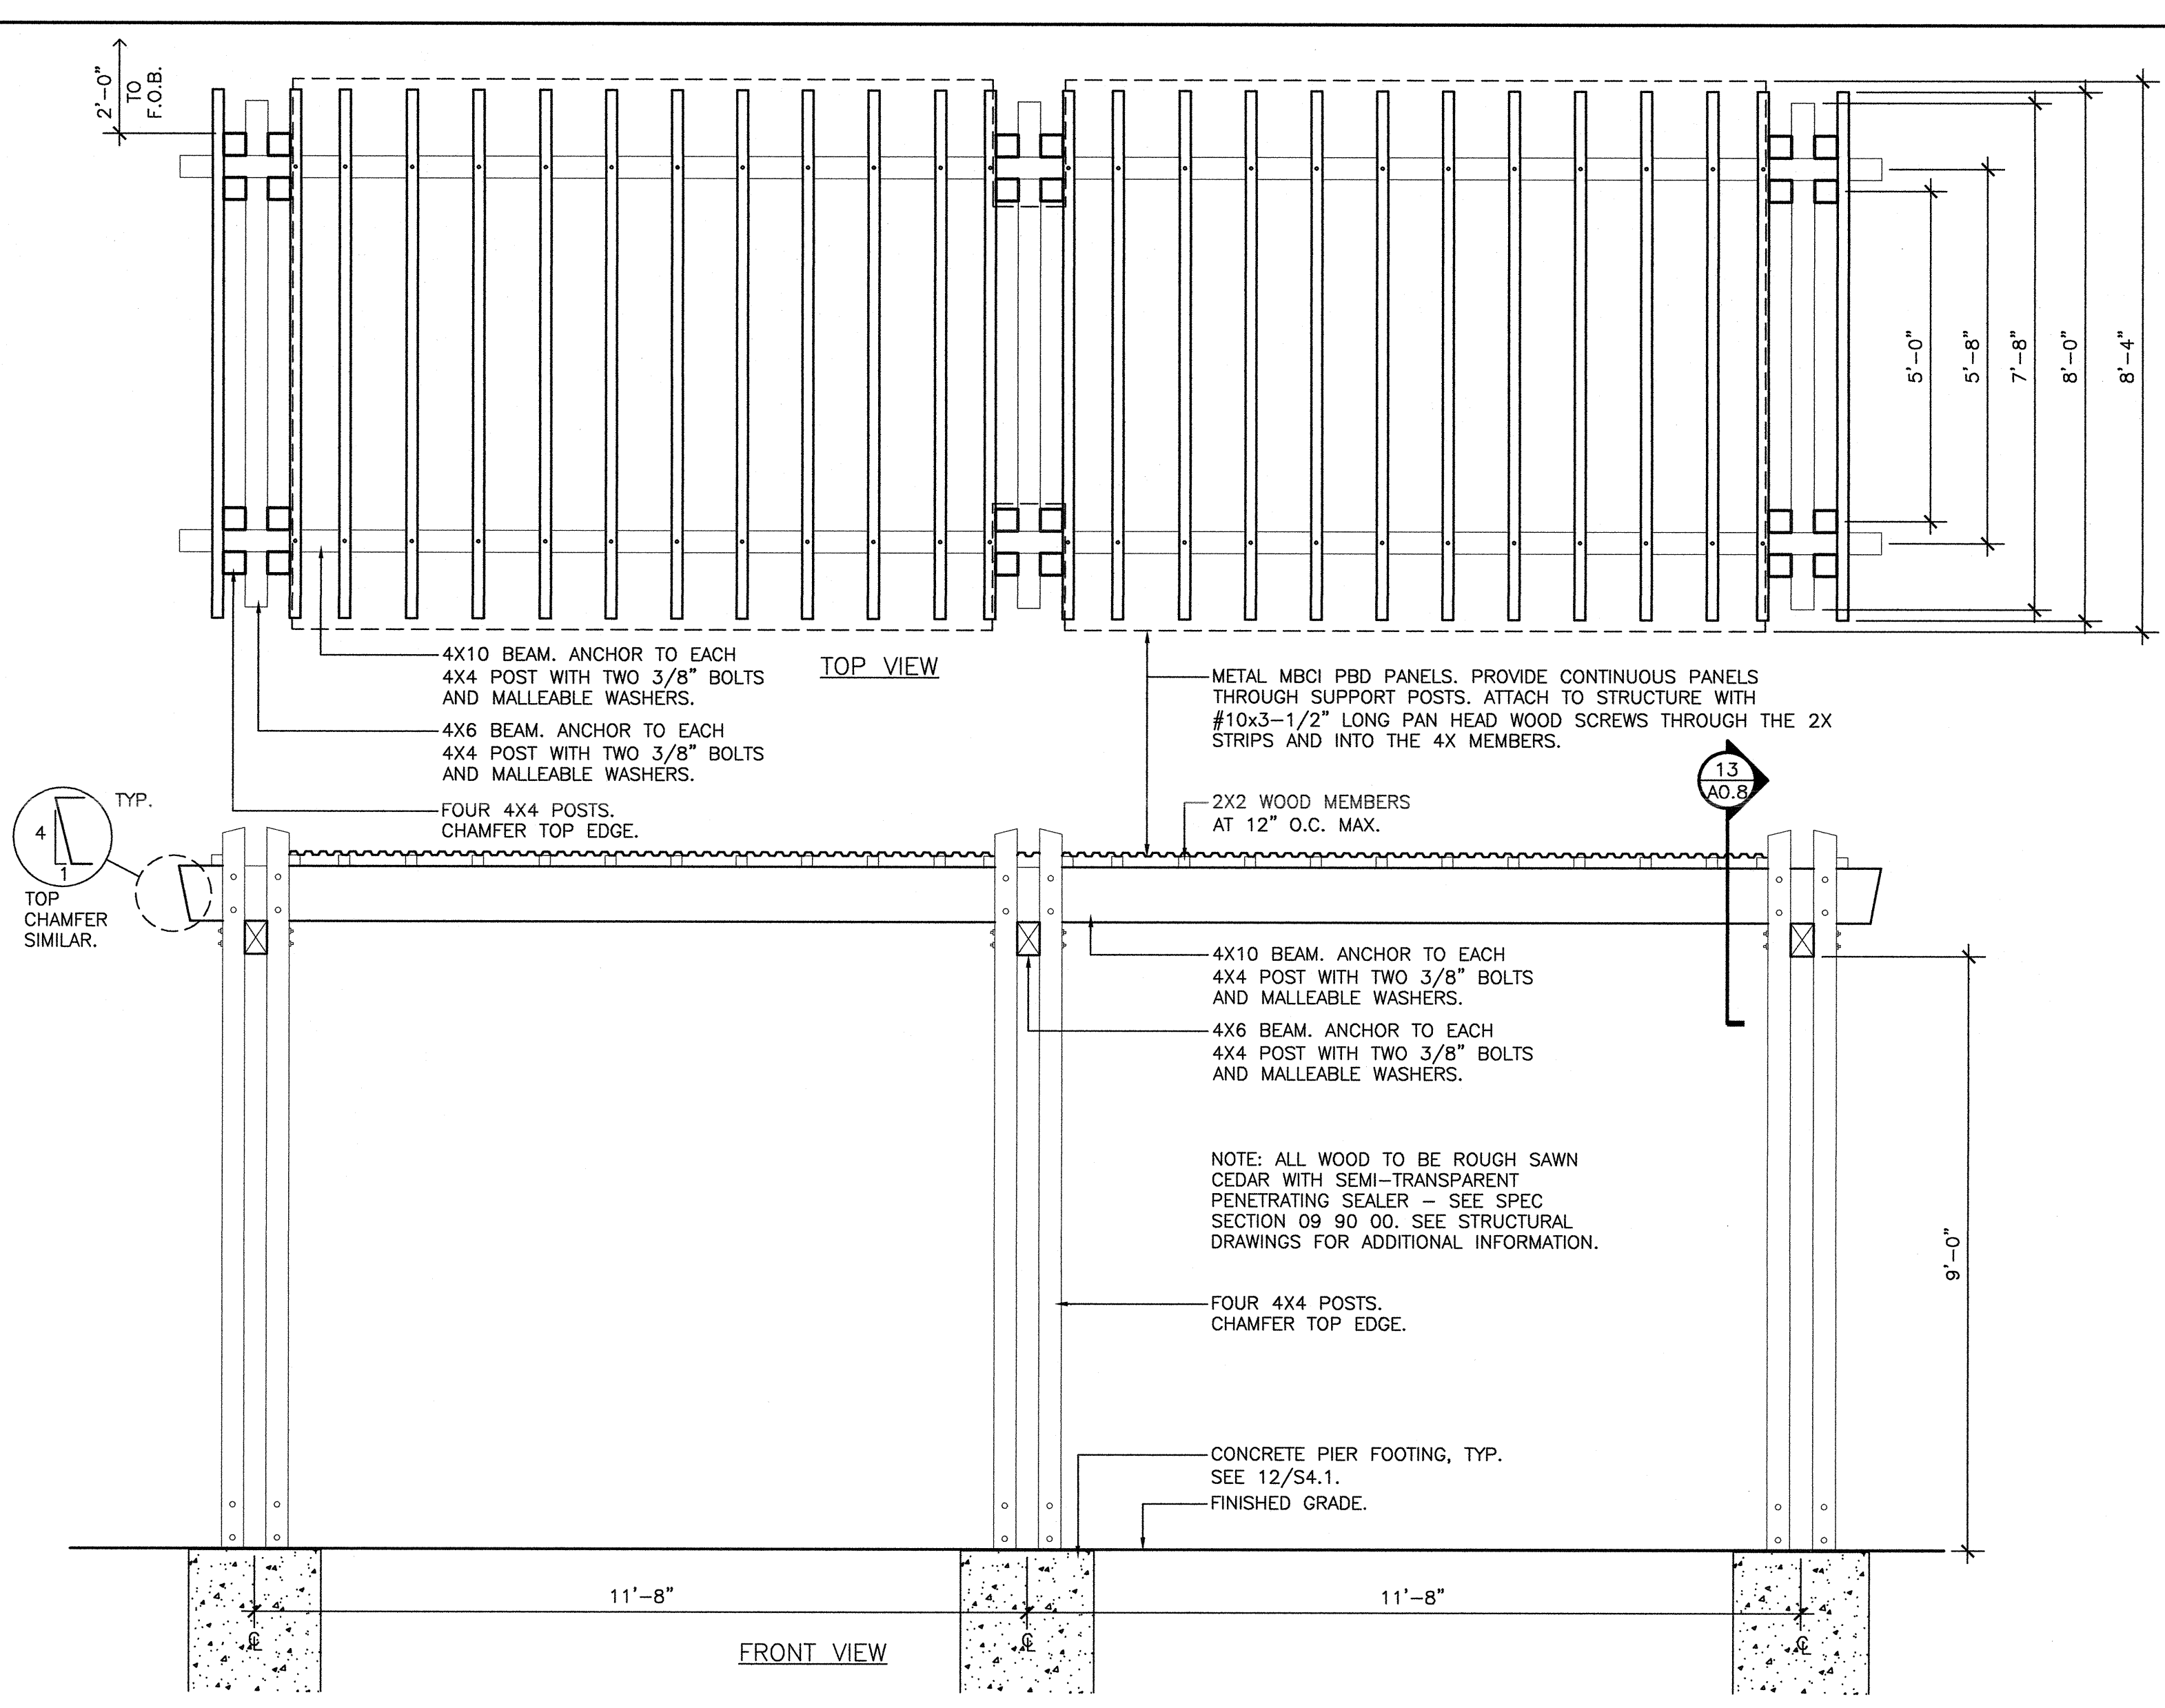

3 PERGOLA— NORTH STAFF ENTRANCE
SCALE: 1/2" = 1'-0"

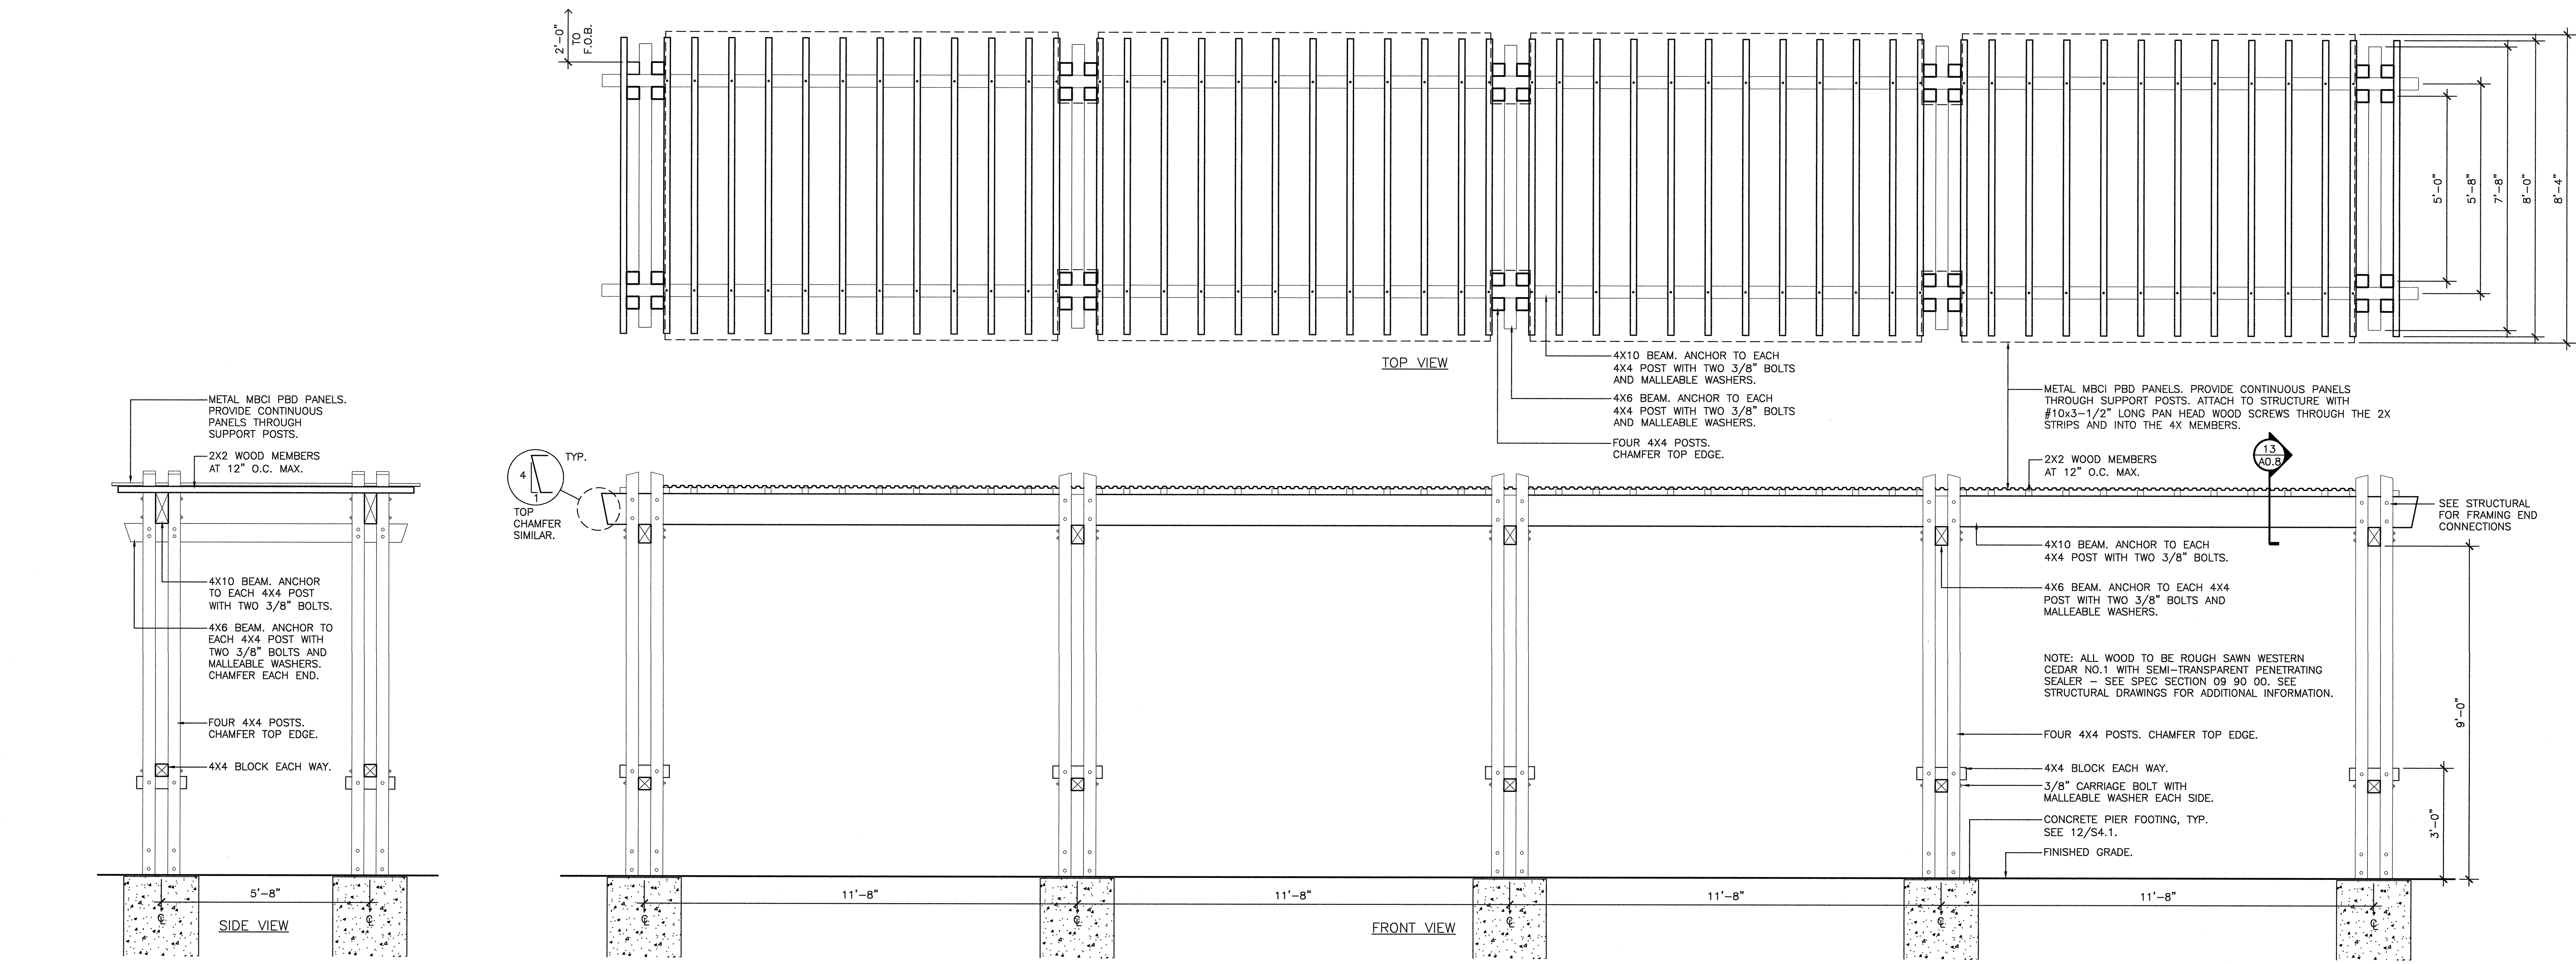


1 PERGOLA— EAST COMMUNITY ROOM
SCALE: 1/2" = 1'-0"

Dry Creek Joint Elementary School District
District Education Center

8849 Cook Riolo Road, Roseville, CA 95747

Dry Creek Joint Elementary School District

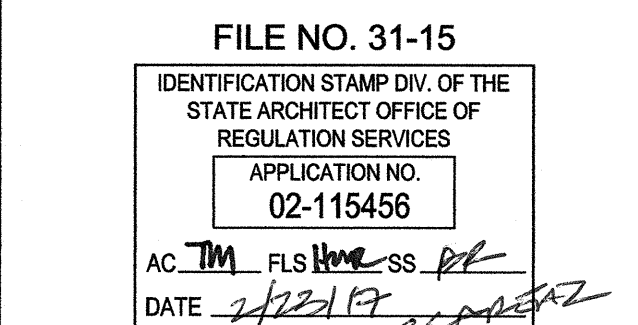


DIVISION OF THE STATE ARCHITECT
revision date: by:

CONSULTANT

nacht&lewis

600 O Street, Suite 100
Sacramento, CA 95811
www.nachtandlewis.com
916.329.4000

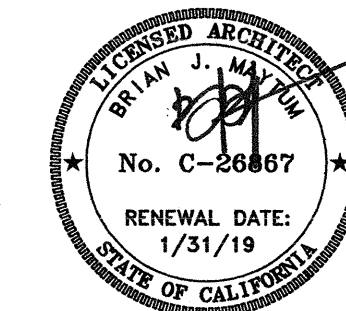

ARCHITECT

INITIAL BOX

NO.	DWG BY	DATE	REVIEWED

REVISIONS

NO.	DESCRIPTION	DATE	REV'D

DATE February 23, 2017

JOB NO. Y1538.00

SHEET TITLE

Enlarged
Pergola Plans
and Details

SHEET NO.

A0.7

SHEET OF TOTAL

ONE INCH = TWENTY FEET
ONE-SIXTEENTH INCH = ONE FOOT
ONE-EIGHTH INCH = ONE FOOT
ONE-FOURTH INCH = ONE FOOT
ONE-HALF INCH = ONE FOOT
THREE-QUARTERS INCH = ONE FOOT
ONE INCH = ONE FOOT
ONE AND ONE-HALF INCH = ONE FOOT

30	NOT USED	25	NOT USED	20	NOT USED	15	NOT USED	10	NOT USED	5	NOT USED
29	NOT USED	24	NOT USED	19	NOT USED	14	EXTERIOR LIGHT PLAN SCALE: 1 1/2" = 1'-0"				
28	NOT USED	23	NOT USED	18	NOT USED	13	TRELLIS DETAIL SCALE: 1 1/2" = 1'-0"				
27	NOT USED	22	NOT USED	17	NOT USED						
26	NOT USED	21	NOT USED	16	NOT USED						11

Dry Creek Joint Elementary School District
District Education Center

8849 Cook Riolo Road, Roseville, CA 95747

Dry Creek Joint Elementary School District

FILE NO. 31-15

IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES

APPLICATION NO.
02-115456

AC. THA FLS WLS CS 62

DATE 1/22/17 CS 62

DIVISION OF THE STATE ARCHITECT

revision date: _____ by: _____

CONSULTANT

nacht&lewis

600 O Street, Suite 100
Sacramento, CA 95811
www.nachtlewis.com
916.329.4000

REGISTERED ARCHITECT
No. C-54887
RENEWAL DATE:
1/31/19
STATE OF CALIFORNIA

ARCHITECT

INITIAL BOX

NO.	DWG BY	DATE	REVIEWED

REVISIONS

NO.	DESCRIPTION	DATE	REV'D
	100% design development	1/16/16	
	75% construction documents	9/20/16	
	DSA submittal	12/31/16	
	DSA approval	02/23/17	

DATE February 23, 2017

JOB NO. Y1538.00

SHEET TITLE

Enlarged
Pergola Plans
and Details

SHEET NO.

A0.8


SHEET ____ OF ____ TOTAL

ONE AND ONE-HALF INCH = ONE FOOT
ONE INCH = ONE FOOT
THREE-QUARTERS INCH = ONE FOOT
ONE-HALF INCH = ONE FOOT
ONE-QUARTER INCH = ONE FOOT
ONE-EIGHTH INCH = ONE FOOT
ONE-SIXTEENTH INCH = ONE FOOT
ONE INCH = TWENTY FEET

- KEYNOTES:**
THESE KEYNOTES APPLY TO THIS SHEET ONLY.
- 1 STRUCTURAL COLUMN - SEE STRUCTURAL DRAWINGS AND DETAIL 18/A8.5.
 - 2 RAIN WATER LEADER
 - 3 FIRE ALARM CONTROL PANEL - SEE FIRE ALARM DRAWINGS FOR MORE INFORMATION.
 - 4 RECESSED WALK-OFF GRATE, SEE SPEC SECTION 10 00 00.
 - 5 OPERABLE PANEL PARTITION

- GENERAL SHEET NOTES:**
- SEE SHEET A7.1 FOR ALL FINISHES.
 - SEE SHEET A8.0 FOR WALL AND PARTITION TYPES, DENOTED [F]—
INTERIOR PARTITIONS ARE PARTITION TYPE [6] EXCEPT WHERE OTHERWISE NOTED
ALL EXTERIOR WALLS ARE WALL TYPE [1]
 - ALL INTERIOR DIMENSIONS ARE TO CENTER OF STUD UNLESS OTHERWISE NOTED.
 - ALL EXTERIOR DIMENSIONS ARE TO FACE OF STUD UNLESS OTHERWISE NOTED.
 - SEE SHEET A7.2 FOR ALL CASEWORK AND EQUIPMENT.
 - SEE SHEET A6.1 FOR ALL WINDOW ELEVATIONS

- LEGEND:**
- 1-HR FOR RATED OCCUPANCY SEPARATION.
 - FEC FIRE EXTINGUISHER CABINET.
 - 100 OPENING TYPE - SEE SHEET A6.1.

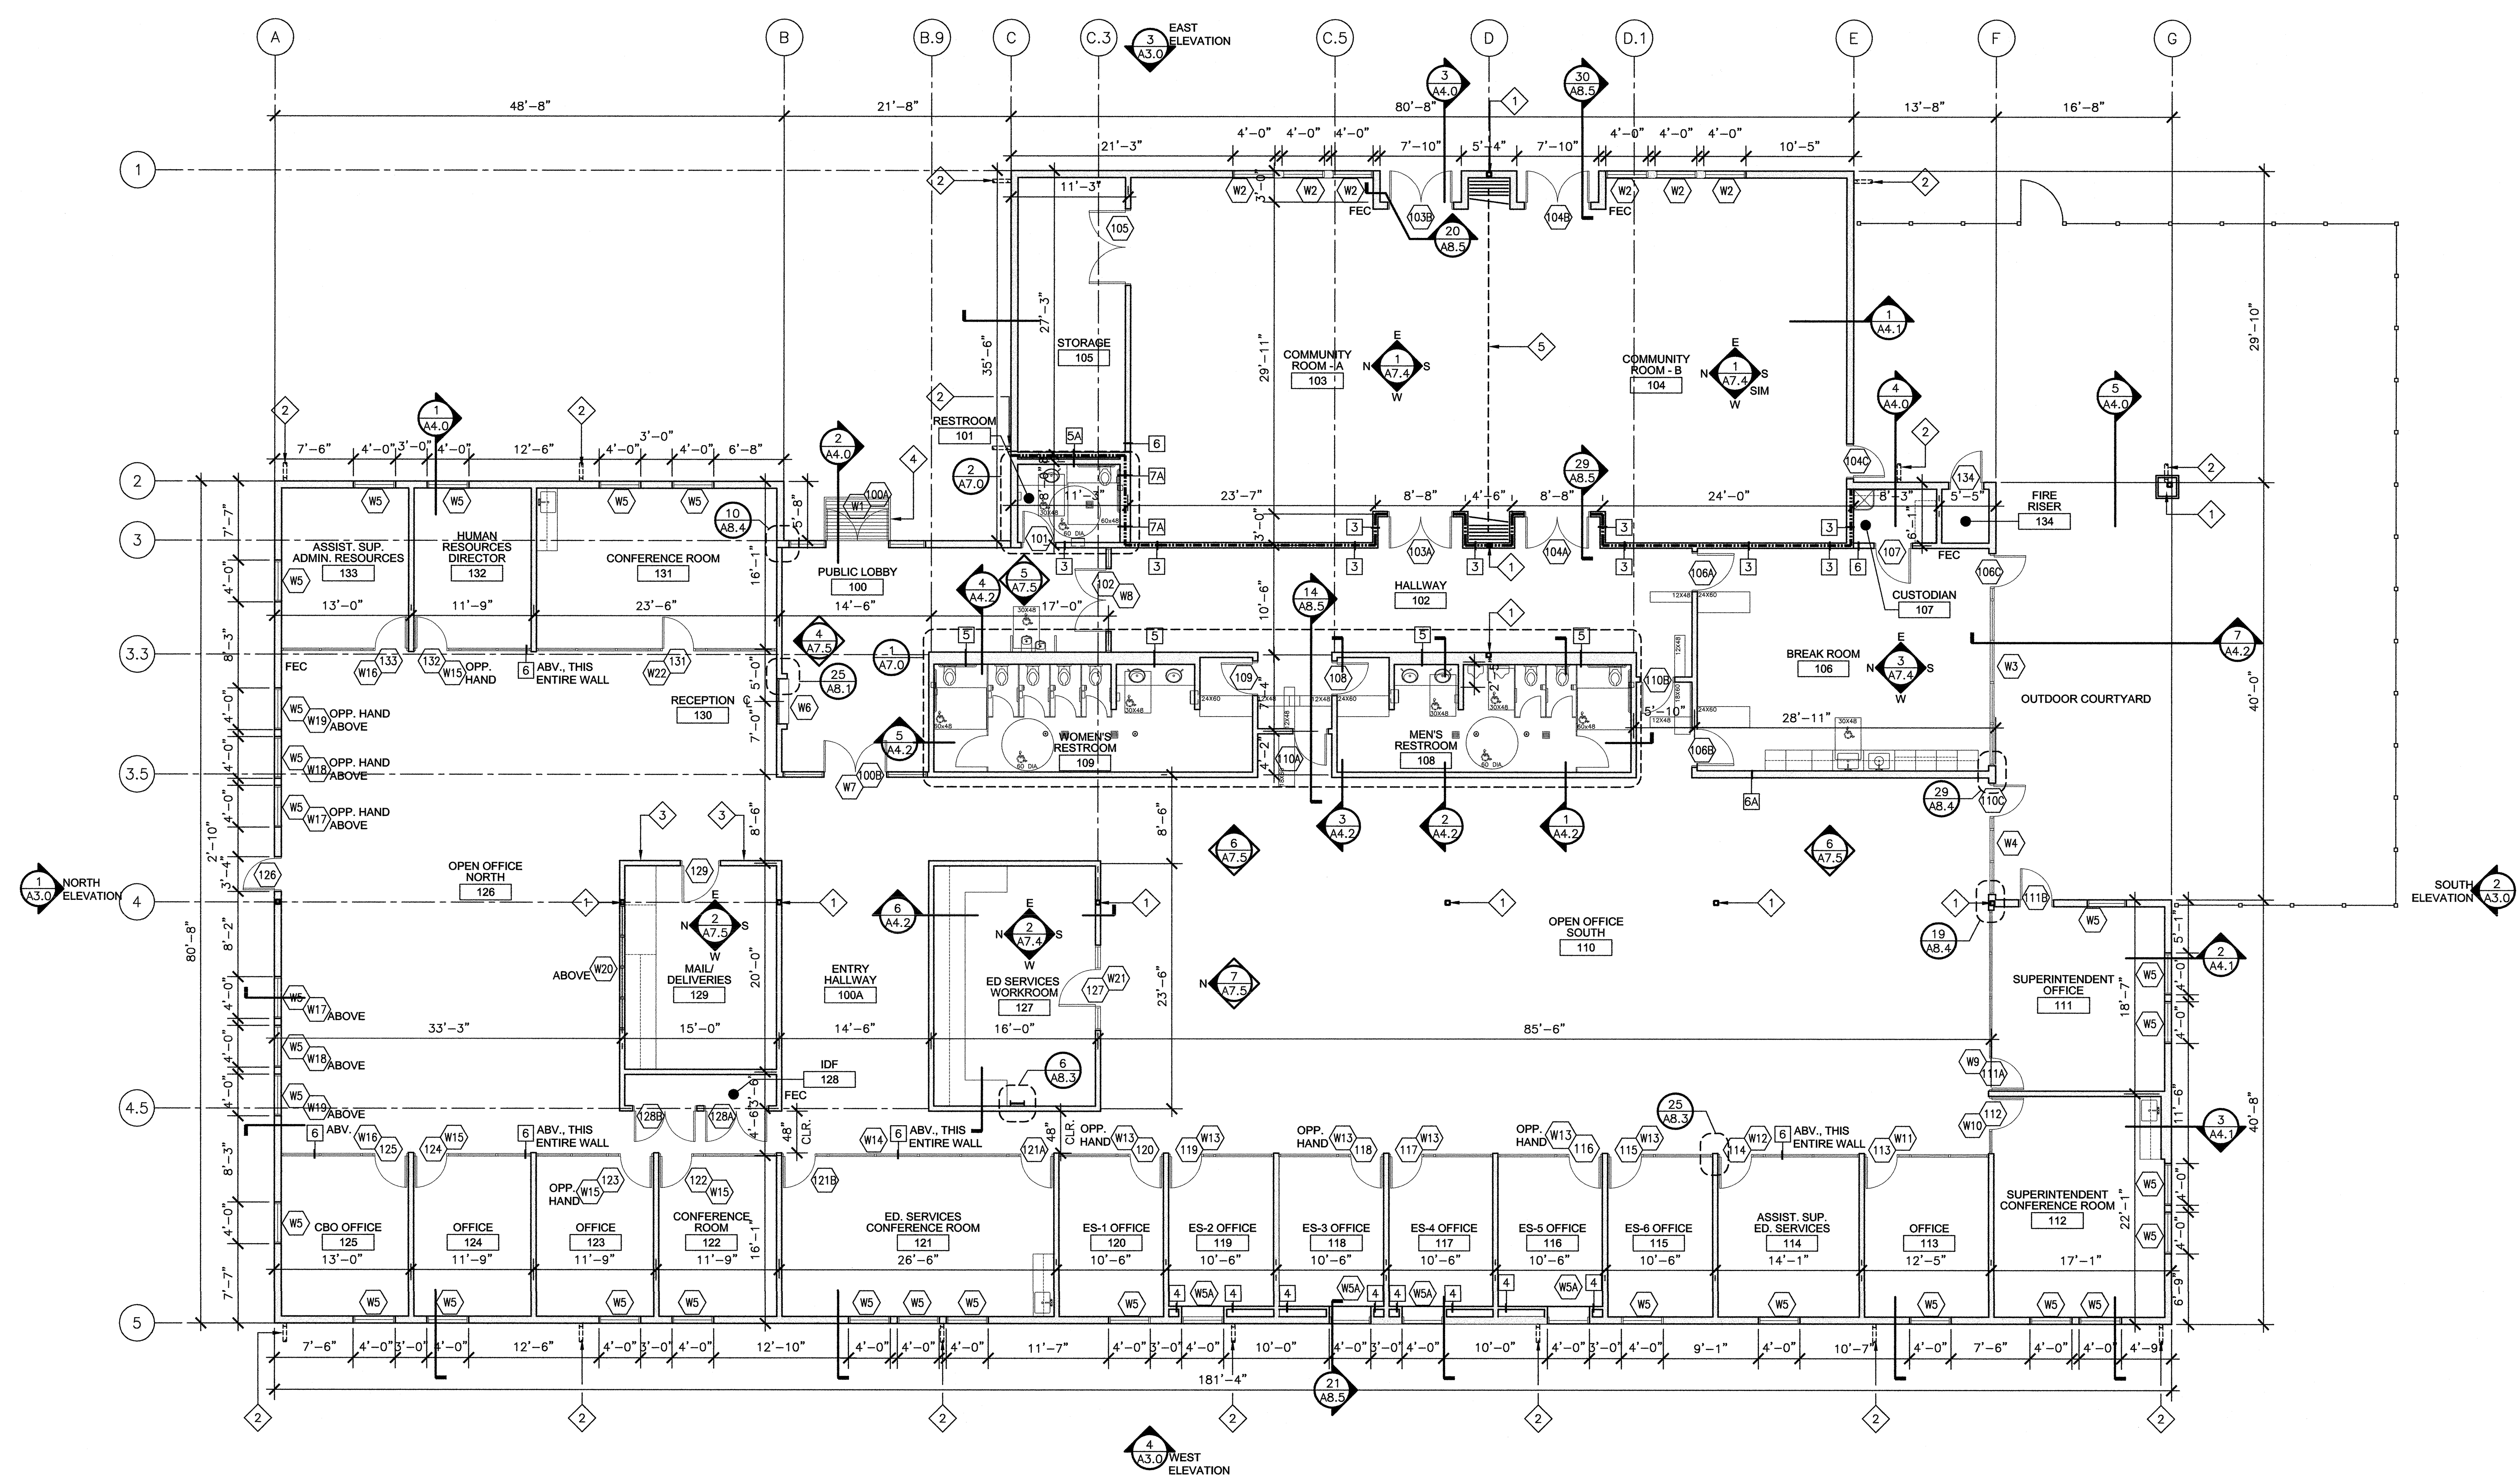

1 Floor Plan
SCALE: 1/8" = 1'-0"
north

Dry Creek Joint Elementary School District
District Education Center
8849 Cook Riolo Road, Roseville, CA 95747
Dry Creek Joint Elementary School District

FILE NO. 31-15
IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-115456
AC. TIA FLS JMC SS. BLK
DATE 2/23/17 CCA

DIVISION OF THE STATE ARCHITECT
revision date: by:

CONSULTANT

nacht&lewis
600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtandlewis.com
916.329.4000

REGISTERED ARCHITECT
No. C-28487
RENEWAL DATE:
1/31/19
STATE OF CALIFORNIA

ARCHITECT

INITIAL BOX			
NO.	DWG BY	DATE	REVIEWED
REVISIONS			
NO.	DESCRIPTION	DATE	REV'D
	100% design development	7/6/16	
	75% construction documents	9/20/16	
	DSA submittal	12/31/16	
	DSA approval	02/23/17	

DATE February 23, 2017
JOB NO. Y1538.00
SHEET TITLE

Floor Plan
SHEET NO.
A1.0
SHEET ____ OF ____ TOTAL