


ONE AND ONE-HALF INCH = ONE FOOT
THREE-QUARTERS INCH = ONE FOOT
ONE-QUARTER INCH = ONE FOOT
ONE-EIGHTH INCH = ONE FOOT
ONE-SIXTEENTH INCH = ONE FOOT
ONE INCH = TWENTY FEET

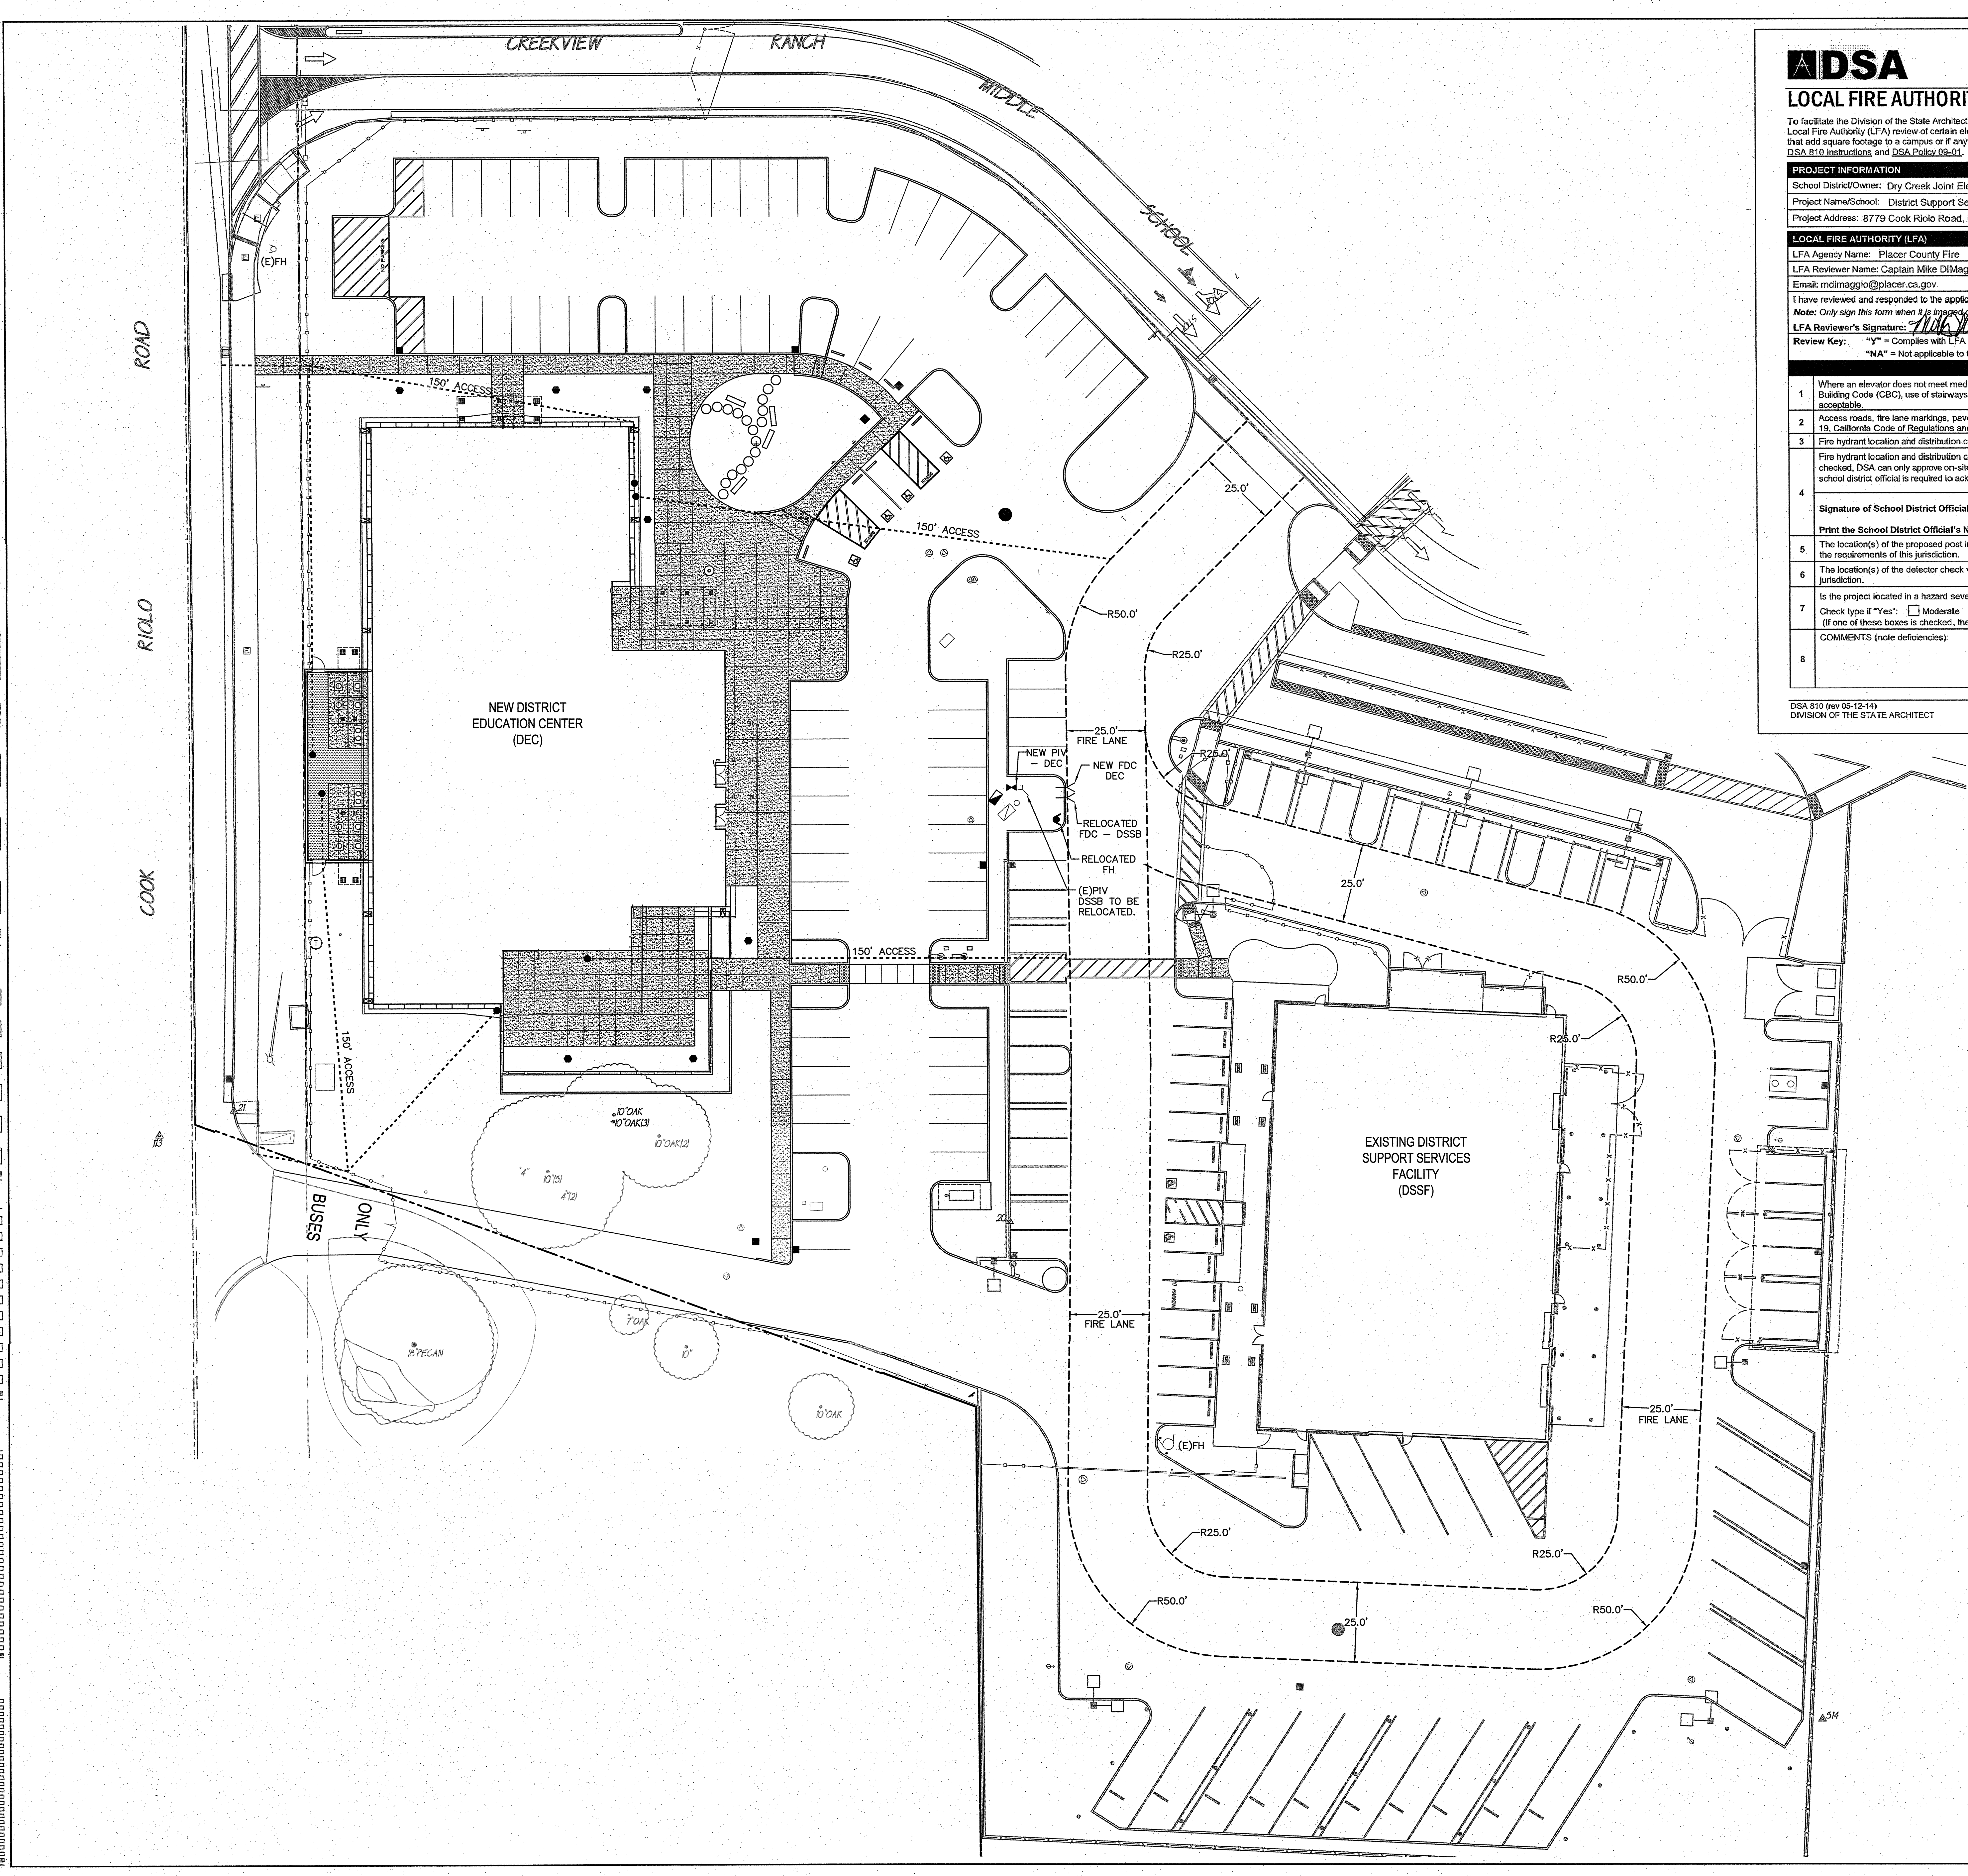

ADSA
LOCAL FIRE AUTHORITY REVIEW

810

To facilitate the Division of the State Architect's (DSA) approval of the Fire/Life Safety portion of a project, DSA requires Local Fire Authority (LFA) review of certain elements as identified in this form. Use of this form is mandatory for projects that add square footage to a campus or if any item on this form is relevant to the project. For additional information, see DSA 810 Instructions and DSA Policy 08-01.

PROJECT INFORMATION

School District/Owner: Dry Creek Joint Elementary School District
Project Name/School: District Support Services Building
Project Address: 8779 Cook Riolo Road, Roseville, CA 95747

LOCAL FIRE AUTHORITY (LFA)

LFA Agency Name: Placer County Fire
LFA Reviewer Name: Captain Mike DiMaggio
Title: Fire Prevention Officer
Email: mdimaggio@placer.ca.gov
Telephone Number: (530) 745-3574

I have reviewed and responded to the applicable items for this project as listed below.
Note: Only sign this form when it is incorporated into the site plan. A loose form is not acceptable to DSA.

LFA Reviewer's Signature: *[Signature]* Date: 10/17/2016

Review Key: "Y" = Complies with LFA requirements "N" = Not approved (complete Section 8)
"NA" = Not applicable to the project "NR" = LFA elects not to review

Description	Y	N	NA	NR
1 Where an elevator does not meet medical emergency service cab size, per the California Building Code (CBC), use of stairways for emergency rescue and patient transport is acceptable.			X	
2 Access roads, fire lane markings, pavers and gate entrances are in accordance with Title 19, California Code of Regulations and the California Fire Code, Chapter 5.	X			
3 Fire hydrant location and distribution complies with the California Fire Code (or see # 4).	X			
4 Fire hydrant location and distribution complies with NFPA 1142, "Alternate Means." If "NR" is checked, DSA can only approve on-site water storage as an alternate. The signature of the school district official is required to acknowledge the use of alternate means.	X			

Signature of School District Official: *[Signature]* Date: 10/17/2016

Print the School District Official's Name: *Shawn Schudelmayr*

5 The location(s) of the proposed post indicator valve and fire department connection meet the requirements of this jurisdiction.	X			
6 The location(s) of the detector check valve assembly meet the requirements of this jurisdiction.	X			
7 Is the project located in a hazard severity zone area? (CBC, Chapter 7A, Section 701A.) Check type if "Yes": ☐ Moderate ☐ High ☐ Very High ☐ WIFA (If one of these boxes is checked, the project design must meet the requirements of Chapter 7A.)				
8 COMMENTS (note deficiencies):				

DSA 810 (rev 05-12-14) DIVISION OF THE STATE ARCHITECT DEPARTMENT OF GENERAL SERVICES STATE OF CALIFORNIA Page 1 of 1

Dry Creek Joint Elementary School District
District Education Center

8849 Cook Riolo Road, Roseville, CA 95747
Dry Creek Joint Elementary School District

FILE NO. 34-xx
IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-XXXXXX
AC. TM FLS *[Signature]*
DATE 2/23/17 *[Signature]*

DIVISION OF THE STATE ARCHITECT
revision date: by:

REGISTERED PROFESSIONAL ARCHITECT
THOMAS E. FASSBENDER
No. 04854
10/17/2016

WCE
WARREN CONSULTING ENGINEERS, INC.
1117 WINDFIELD WAY, SUITE 110
EL DORADO HILLS, CA 95672
CONSULTANT

nacht&lewis
600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtlewis.com
916.329.4000

REGISTERED ARCHITECT
NIGHT & LEWIS
No. C-26887
RENEWAL DATE:
1/31/17


ARCHITECT

INITIAL BOX
NO. DWG BY DATE REVIEWED


REVISIONS
NO. DESCRIPTION DATE REV'D
100% design development 7/8/16
75% construction documents 9/23/16
DSA submittal 10/18/16

DATE October 18, 2016
JOB NO. Y1538.00
SHEET TITLE
Fire Protection Plan





SHEET NO.
C4.3
SHEET OF TOTAL

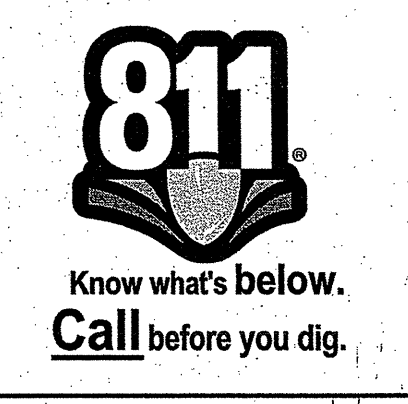

ONE INCH = TWENTY FEET
ONE-SIXTEENTH INCH = ONE FOOT
ONE-EIGHTH INCH = ONE FOOT
ONE-FOURTH INCH = ONE FOOT
ONE-HALF INCH = ONE FOOT
THREE-QUARTERS INCH = ONE FOOT
ONE INCH = ONE FOOT
ONE AND ONE-HALF INCH = ONE FOOT

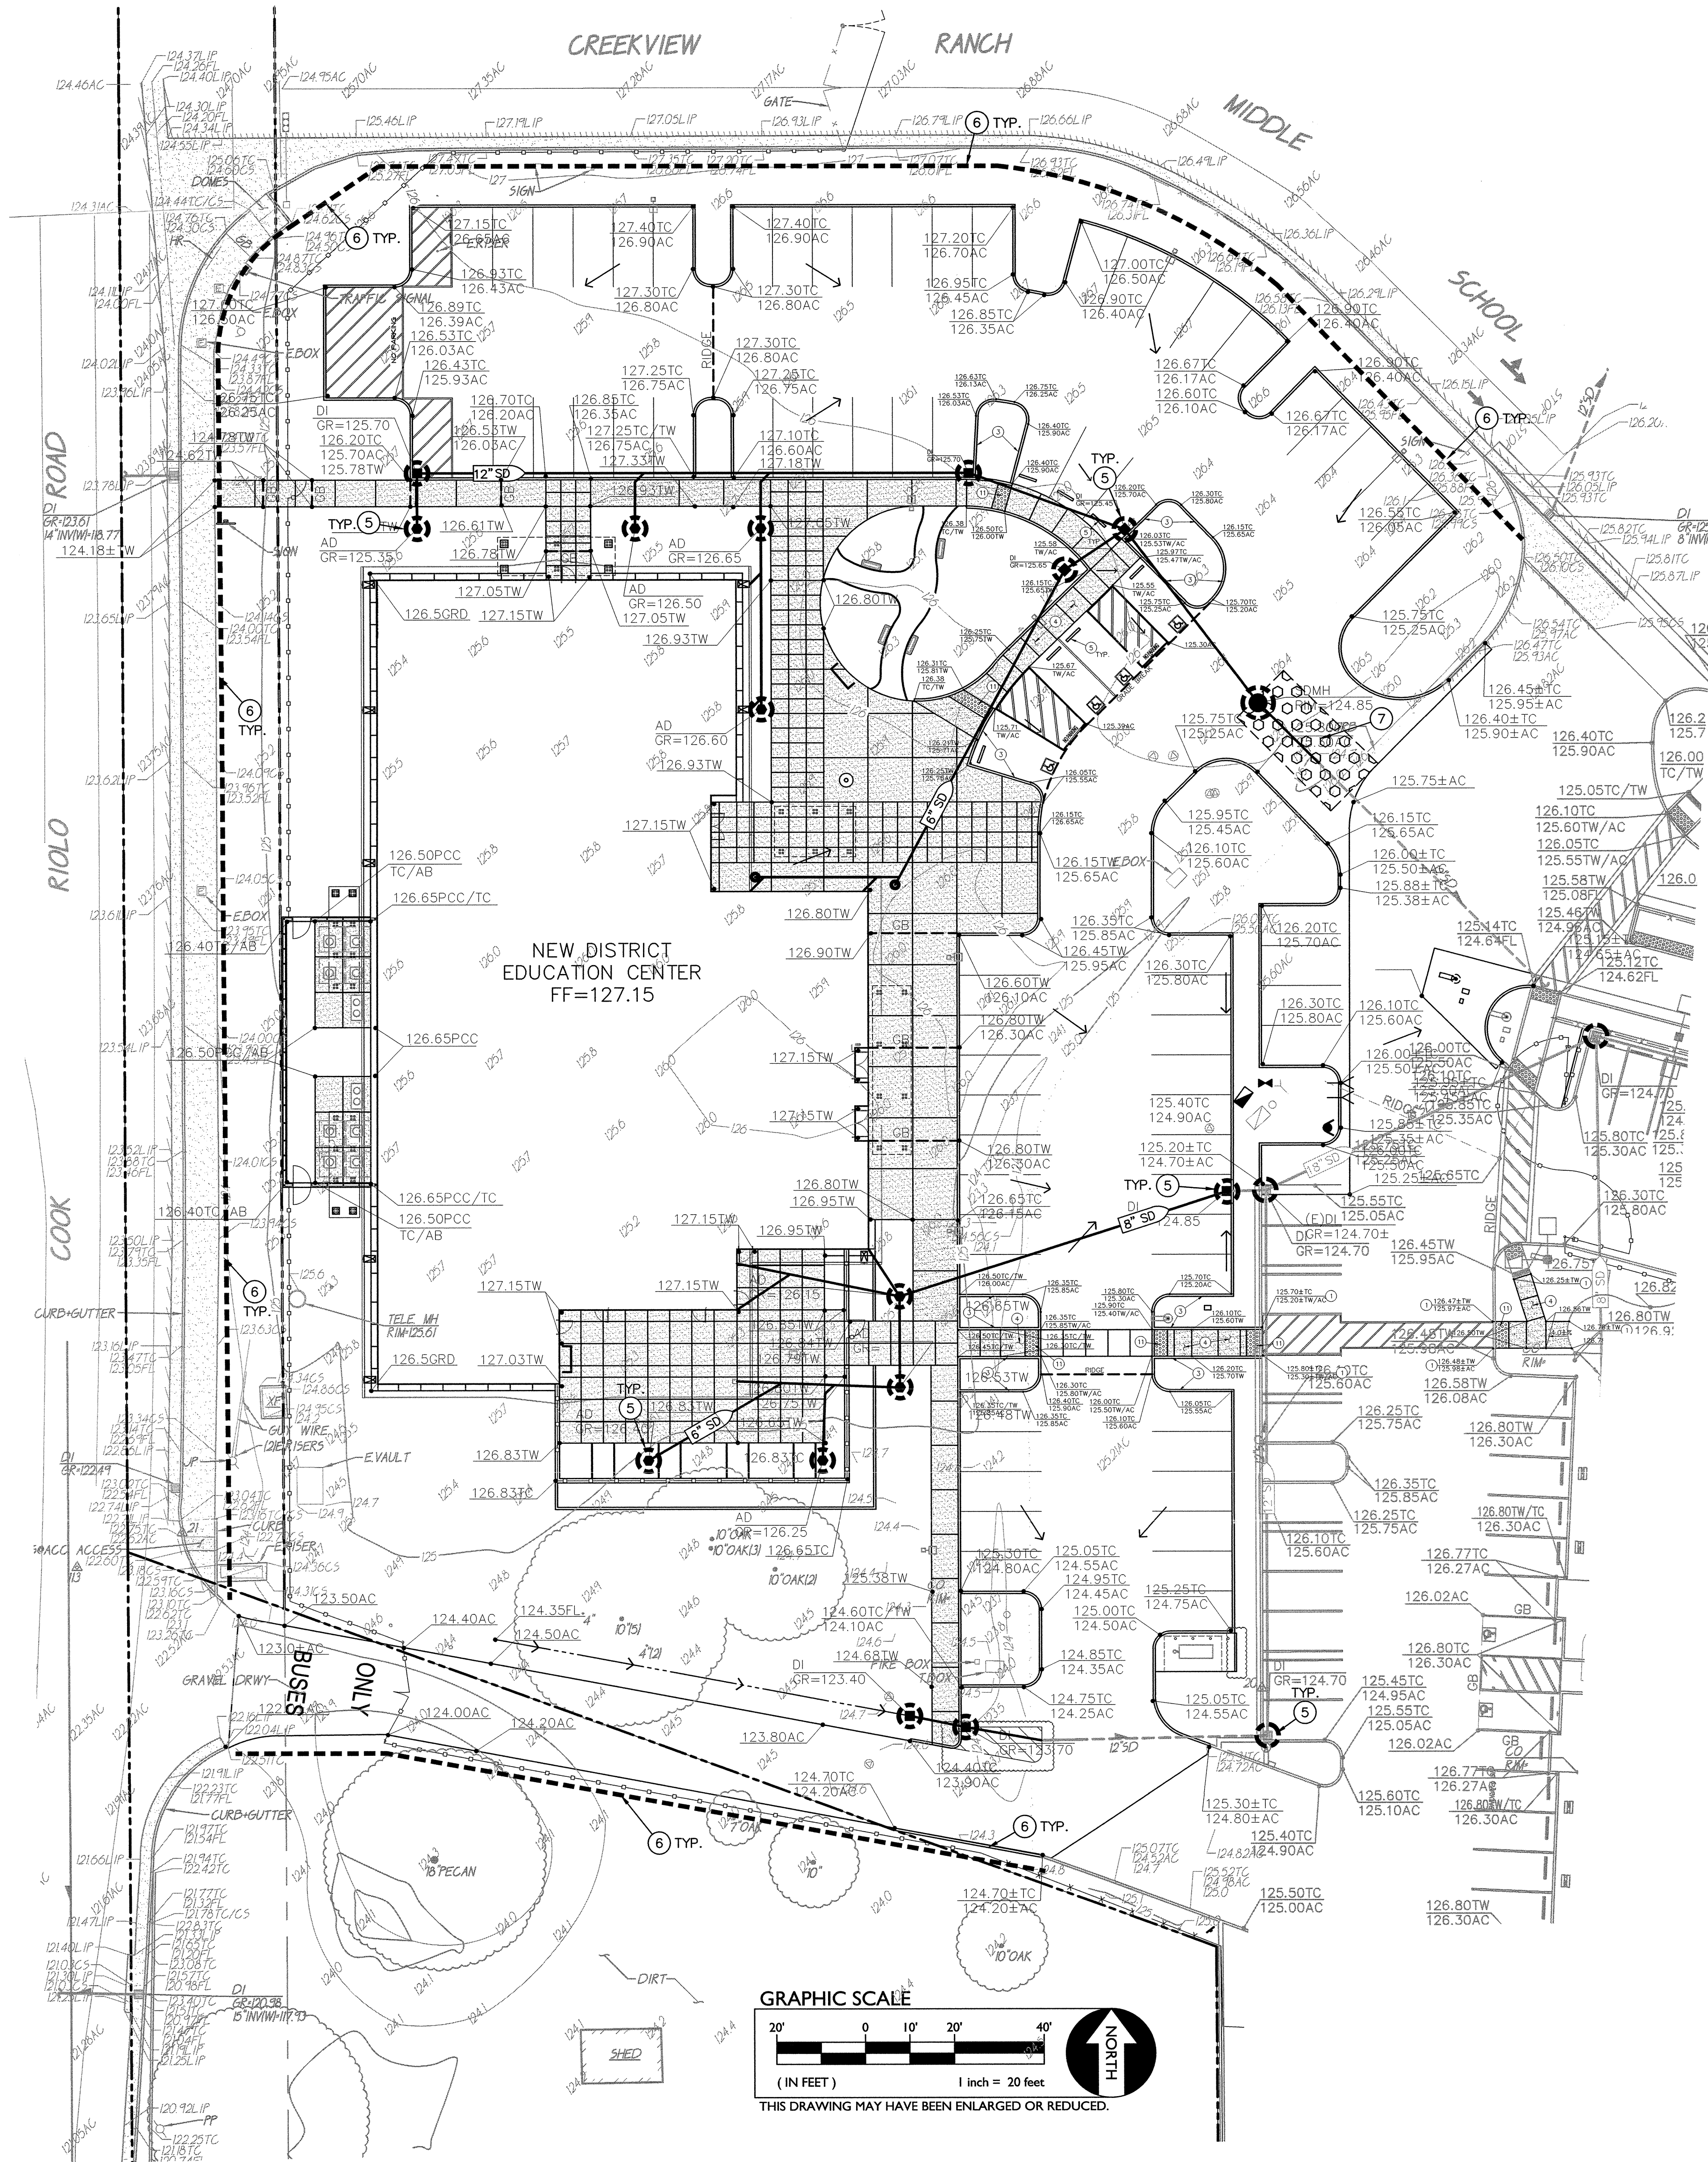

- EROSION CONTROL NOTES**
- CONTRACTOR SHALL BE RESPONSIBLE FOR PREPARING, OBTAINING APPROVAL OF, IMPLEMENTING AND MAINTAINING A "STORM WATER POLLUTION PREVENTION PLAN" (SWPPP), IN DIRECT ACCORDANCE WITH STATE AND LOCAL AGENCIES, PRIOR TO THE START OF CONSTRUCTION.
 - CONTRACTOR'S SWPPP SHALL BE AVAILABLE ON-SITE AT ALL TIMES.
 - CONTRACTOR SHALL ASSUME SOLE RESPONSIBILITY FOR COMPLIANCE WITH STATE WATER RESOURCES CONTROL BOARD REQUIREMENTS.
 - CONTRACTOR SHALL PAY FOR AND SECURE A NOTICE OF INTENT PERMIT (NOI) WITH THE STATE WATER RESOURCES CONTROL BOARD REQUIREMENTS.
 - CONTRACTOR SHALL PROVIDE STRAW WATTLE BARRIER AT ALL INLETS (NEW AND/OR EXIST.) IN AREAS OF WORK, OR AS REQUIRED BY CONTRACTOR'S SWPPP.
 - CONTRACTOR SHALL PROVIDE STRAW WATTLES AT PERIMETER OF SITE AND IN AREAS REQUIRED BY THE CONTRACTOR'S SWPPP.
 - CONTRACTOR SHALL PROVIDE STABILIZED CONSTRUCTION SITE ACCESS PER DETAIL AT LOCATIONS REQUIRED FOR CONSTRUCTION ACTIVITIES.
 - CONTRACTOR SHALL PROVIDE SEDIMENT BASINS AS REQUIRED TO MITIGATE SILT RUN OFF AND AS REQUIRED BY CONTRACTORS SWPPP.
 - CONTRACTOR SHALL MAINTAIN ALL STRAW WATTLES AND OTHER STORM WATER POLLUTION PREVENTION DEVICES THROUGHOUT CONSTRUCTION. REMOVE ALL POLLUTION PREVENTION DEVICES AT THE END OF CONSTRUCTION AS REQUIRED.
 - PRIOR TO PLACEMENT OF LANDSCAPING AND/OR FINISHED GROUND SEEDING, REMOVE TEMPORARY EROSION CONTROL MEASURES.
 - CONTRACTOR SHALL PROVIDE AND MAINTAIN FILTER BAGS AT INLETS LOCATED IN THE EXISTING ROADWAY.
 - THE PURPOSE OF THIS PLAN IS TO AID THE CONTRACTOR IN THE DEVELOPMENT OF THE STORM WATER POLLUTION PREVENTION PLAN (SWPPP). WARREN CONSULTING ENGINEERS, INC. ASSUMES NO RESPONSIBILITY FOR THE PREPARATION, IMPLEMENTATION, OR MAINTENANCE OF THE SWPPP.
 - CONTRACTOR SHALL HYDROSEED ALL AREAS DISTURBED BY GRADING THAT ARE NOT TO BE IMMEDIATELY LANDSCAPED.

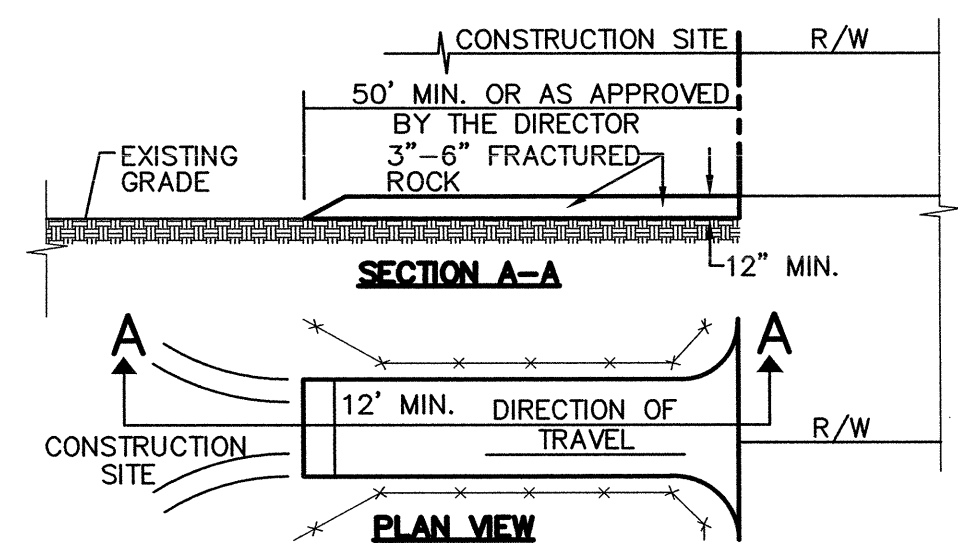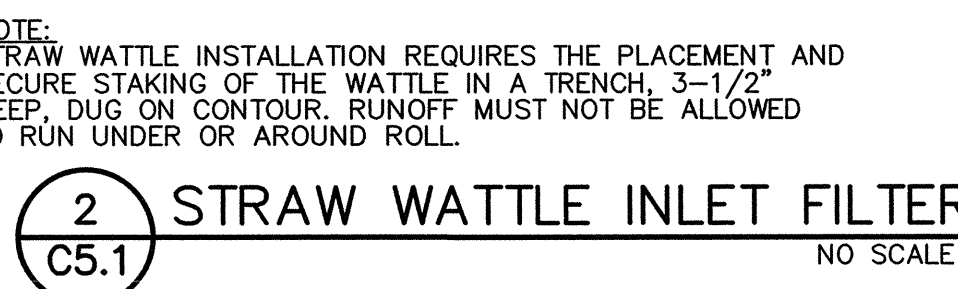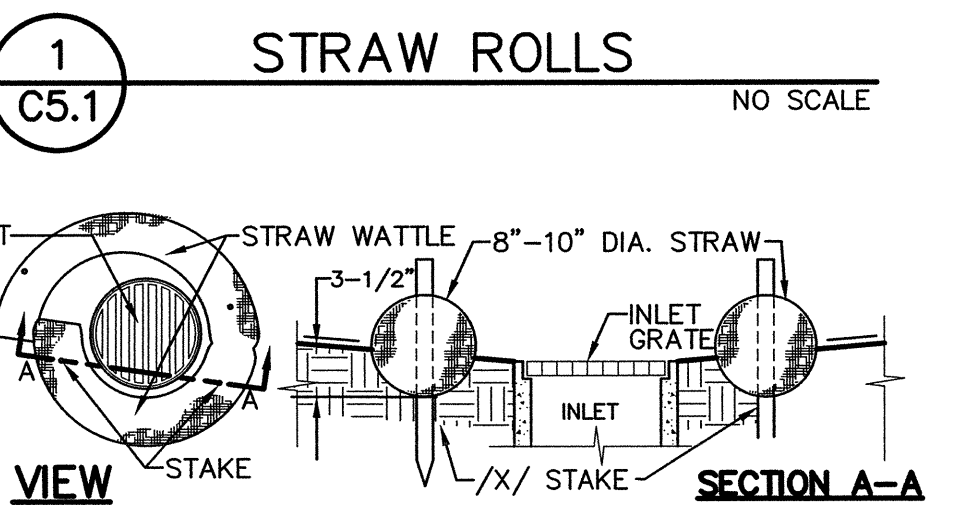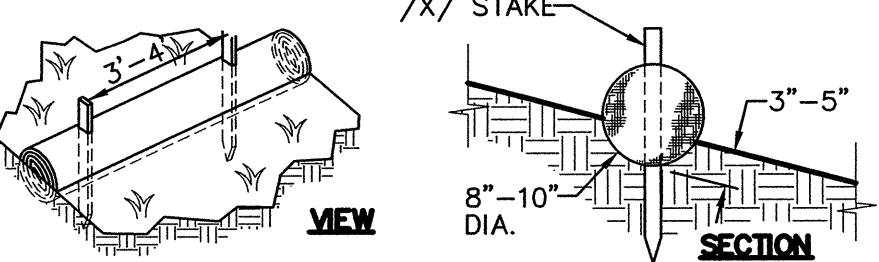

- NOTES:**
- STABILIZED CONSTRUCTION SITE ACCESS SHALL BE CONSTRUCTED OF 3'-6" ANGULAR ROCK MATERIAL CONFORMING TO SECTION 26 OF STATE SPECIFICATIONS. MATERIAL SHALL BE PLACED TO A MINIMUM THICKNESS OF SIX INCHES. THE METHOD OF PLACING, SPREADING AND COMPACTING AGGREGATE BASE MATERIAL SHALL CONFORM TO SECTION 26 OF THE STATE SPECIFICATIONS.
 - LENGTH OF SITE ACCESS SHALL BE A MINIMUM LENGTH OF FIFTY FEET. WIDTH SHALL BE A MINIMUM OF TWELVE FEET OR GREATER AS NECESSARY TO COVER ALL VEHICULAR INGRESS AND EGRESS.
 - THE SITE ACCESS SHALL BE KEPT IN GOOD CONDITION BY OCCASIONAL TOP DRESSING WITH AGGREGATE BASE MATERIAL OR CLEANED AS DIRECTED BY THE DIRECTOR.
 - TRUCK TIRES SHALL BE WASHED DOWN AND THE SEDIMENT CONTAINED ON THE PROJECT SITE.

3 STABILIZED CONSTRUCTION SITE ACCESS
C5.1 NO SCALE

Dry Creek Joint Elementary School District
District Education Center

8849 Cook Riolo Road, Roseville, CA 95747

Dry Creek Joint Elementary School District


FILE NO. 31-15
IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-115456
AC TM FLR SS SS
DATE 2/23/17

DIVISION OF THE STATE ARCHITECT
revision date: by:



WCE
WARREN CONSULTING ENGINEERS, INC.
1117 WINDFIELD WAY, SUITE 110
EL DORADO HILLS, CA 95672
CONSULTANT

nacht&lewis
600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtandlewis.com
916.329.4000

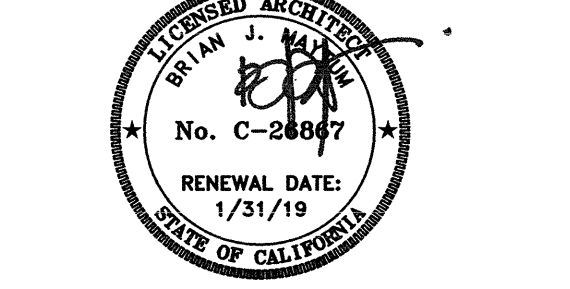

ARCHITECT

INITIAL BOX			
NO.	DWG BY	DATE	REVIEWED

REVISIONS			
NO.	DESCRIPTION	DATE	REV

DATE February 23, 2017

JOB NO. Y1538.00

SHEET TITLE


Erosion Control Plan

SHEET NO.

C5.1

SHEET OF TOTAL

ONE AND ONE-HALF INCH = ONE FOOT
THREE-QUARTERS INCH = ONE FOOT
ONE-HALF INCH = ONE FOOT
ONE-QUARTER INCH = ONE FOOT
ONE-EIGHTH INCH = ONE FOOT
ONE-SIXTEENTH INCH = ONE FOOT
ONE INCH = TWENTY FEET

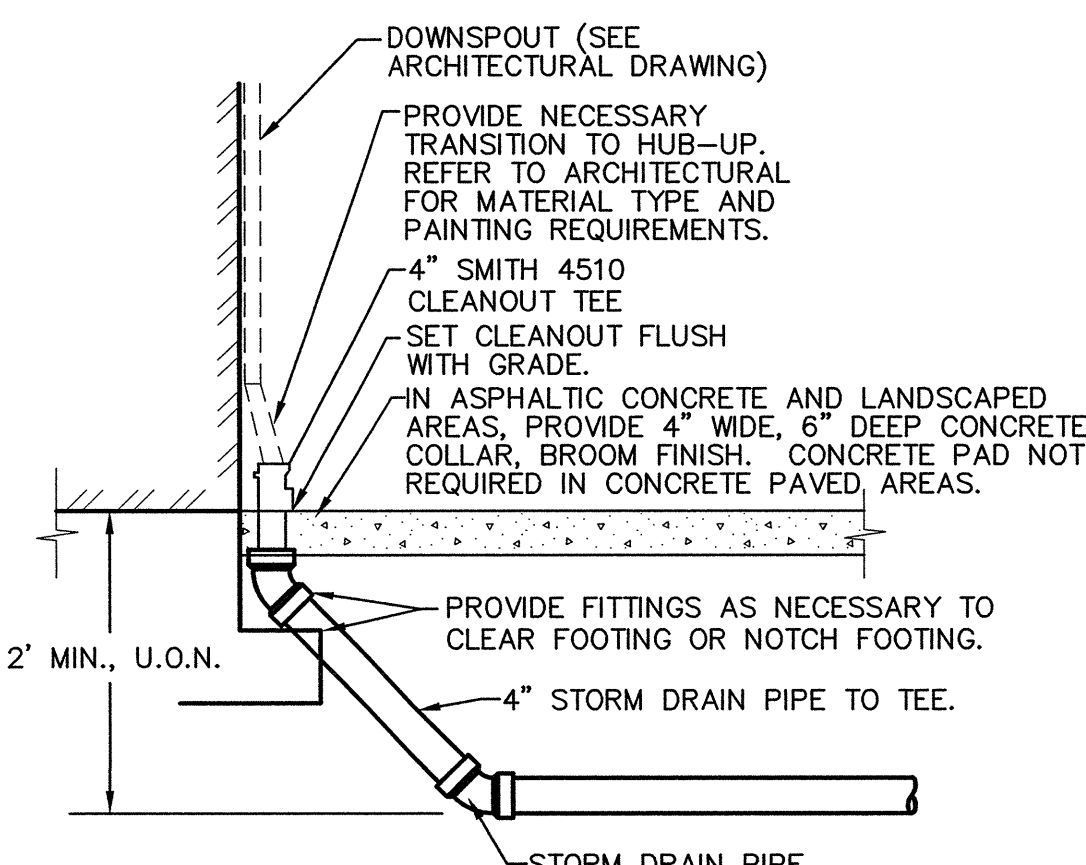


15
C6.1
DOWNSPOUT DETAIL
NO SCALE

REQUIRED BEARING AREAS IN SQ. FT.


INSTALLATION	TYPE FITTING	4"	6"	8"	10"	12"
90° ELL		4	8	14	21	29
45° ELL		2	4	7	11	16
22.5° ELL		1	2	4	8	11
11.25° ELL		1	1	2	3	4
TEE		3	6	10	16	21
DEAD END		3	6	10	16	21
GATE VALVE 4" OR LARGER		3	6	10	16	21
#4 BARS TRENCH KEY 6" MIN.		3	6	10	16	21

- NOTES:
- THRUST BLOCKS ARE TO BE CONSTRUCTED OF 2500 PSI CONCRETE MIN.
 - AREAS IN TABLE HAVE BEEN DERIVED USING A WATER PRESSURE OF 200 POUNDS PER SQUARE INCH (13.8 BARS) AND SOIL RESISTANCE OF 2000 POUNDS PER SQUARE FOOT (137.9 BARS).
 - BLOCKING TO BE POURED AGAINST UNDISTURBED SOIL, 12 INCH THICK MINIMUM.
 - THRUST BLOCKS ARE TO BE FREE, SEPARATE AND INDEPENDENT OF ADJACENT OR NEARBY THRUST BLOCKS.
 - WRAP ALL FITTINGS BEFORE PLACING CONCRETE.


16
C6.1
THRUST BLOCKS
NO SCALE

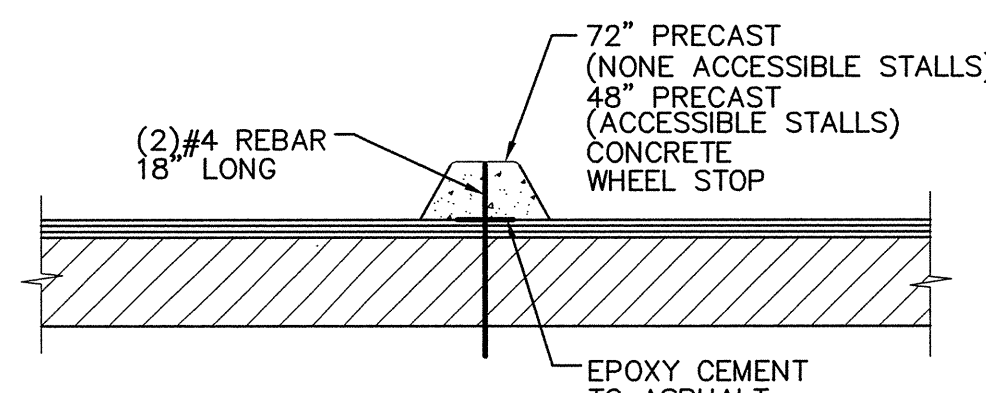


17
C6.1
CONCRETE WHEEL STOP
NO SCALE

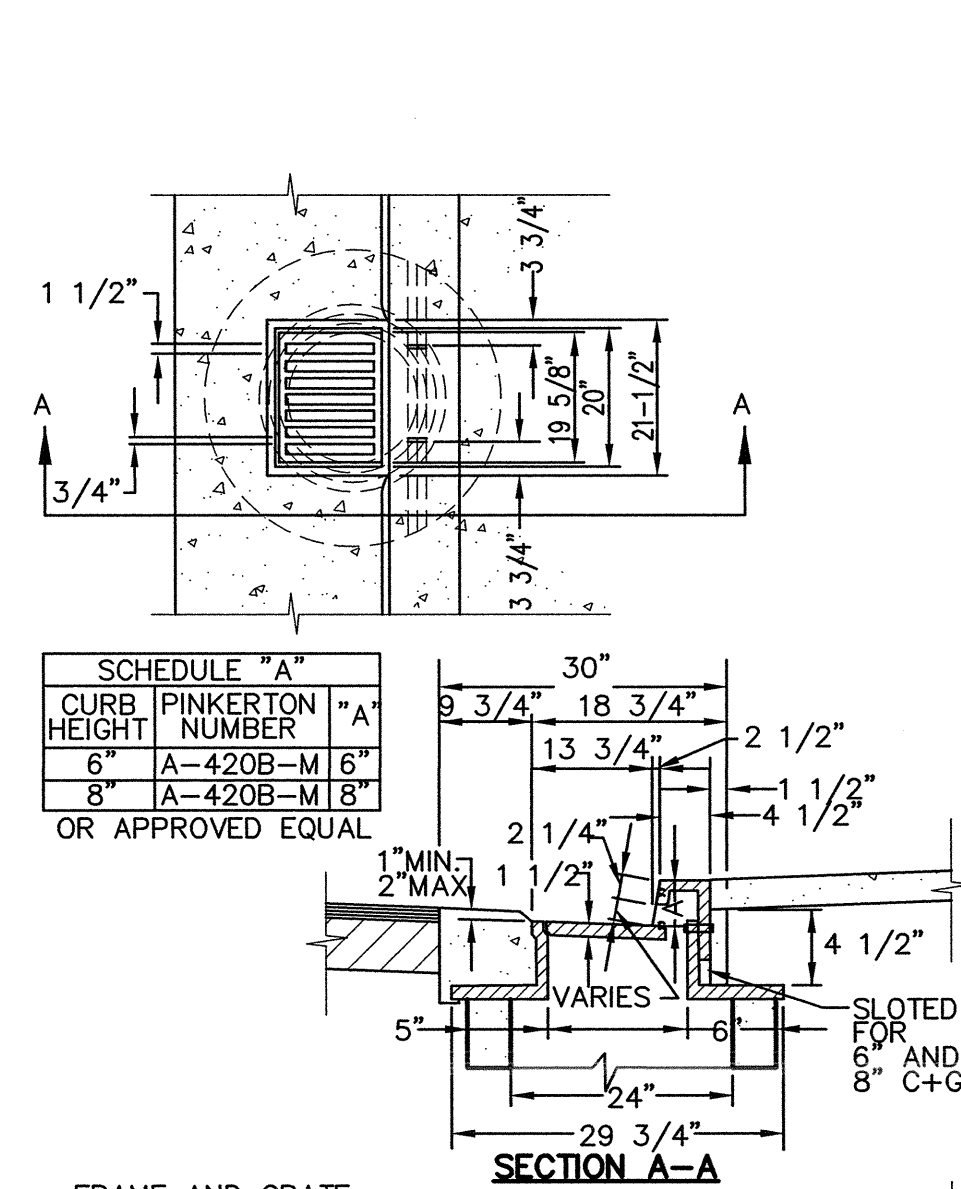


12
C6.1
48" MANHOLE W/ CURB INLET
NO SCALE

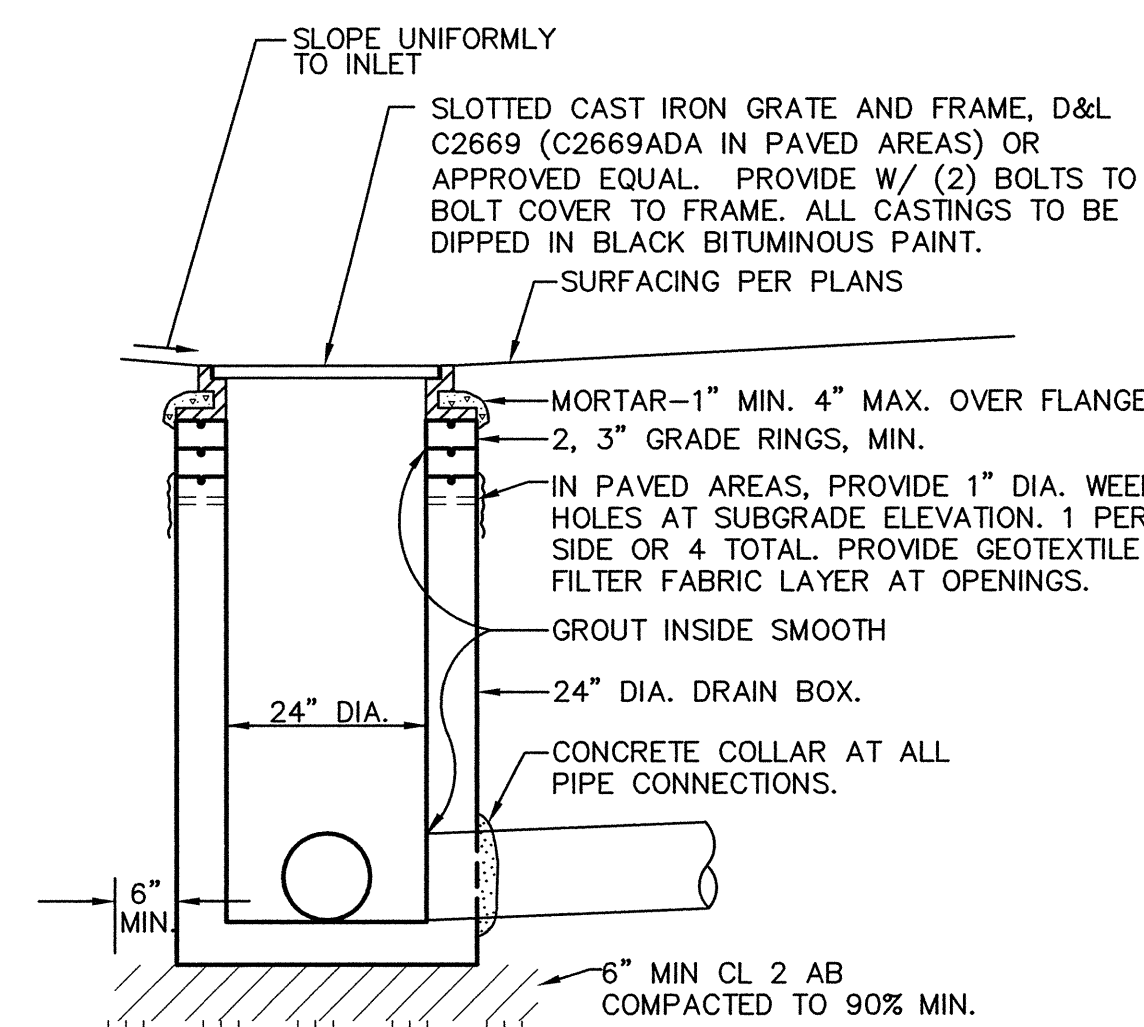


13
C6.1
DROP INLET
NO SCALE

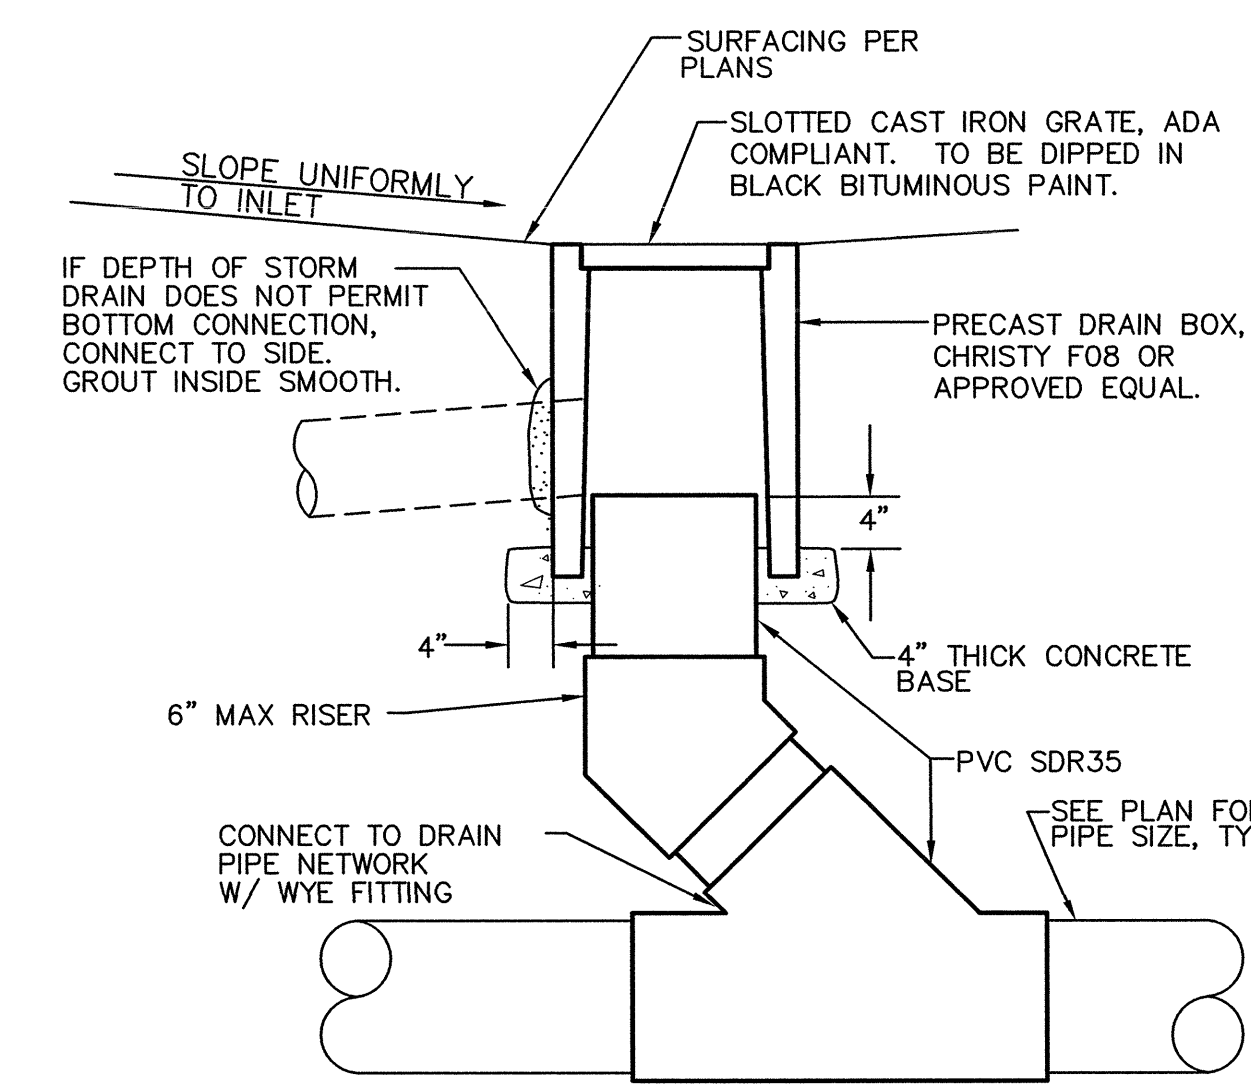


14
C6.1
AREA DRAIN
NO SCALE

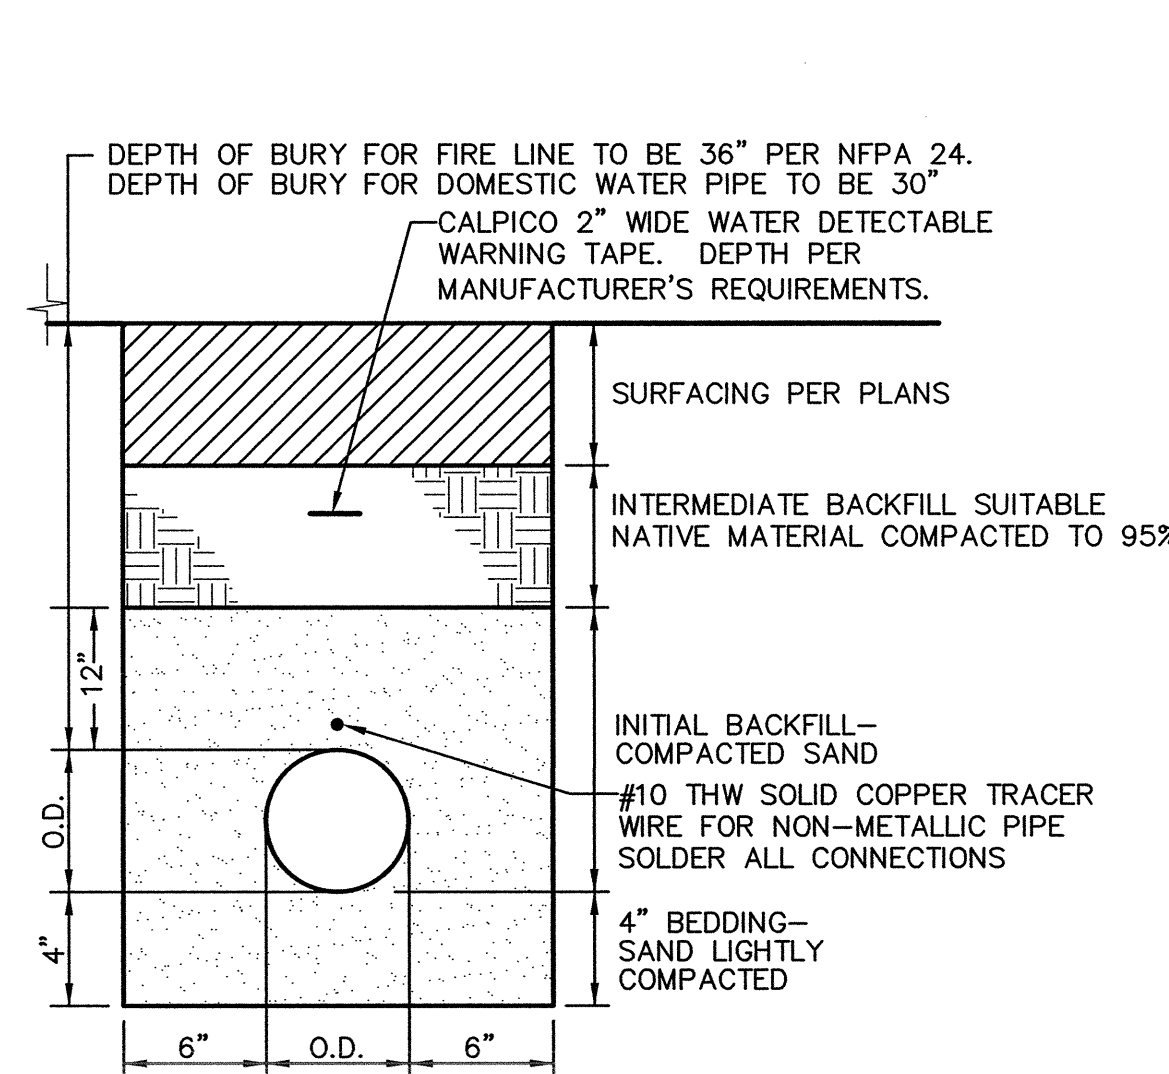

9
C6.1
WATER TRENCH
NO SCALE

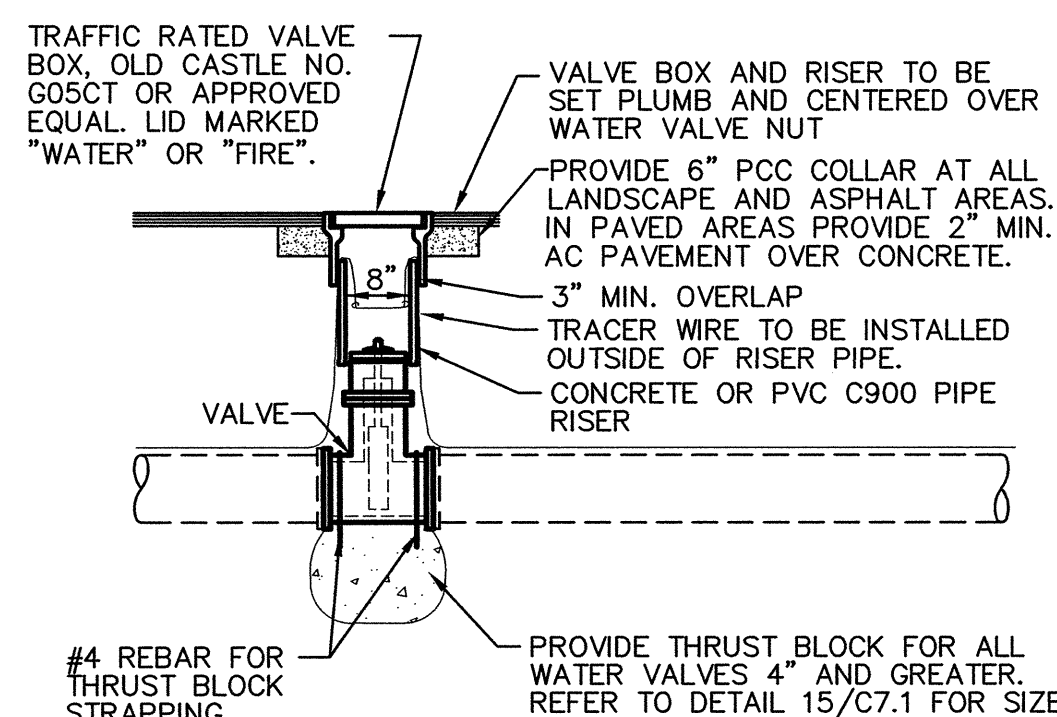


10
C6.1
WATER VALVE
NO SCALE

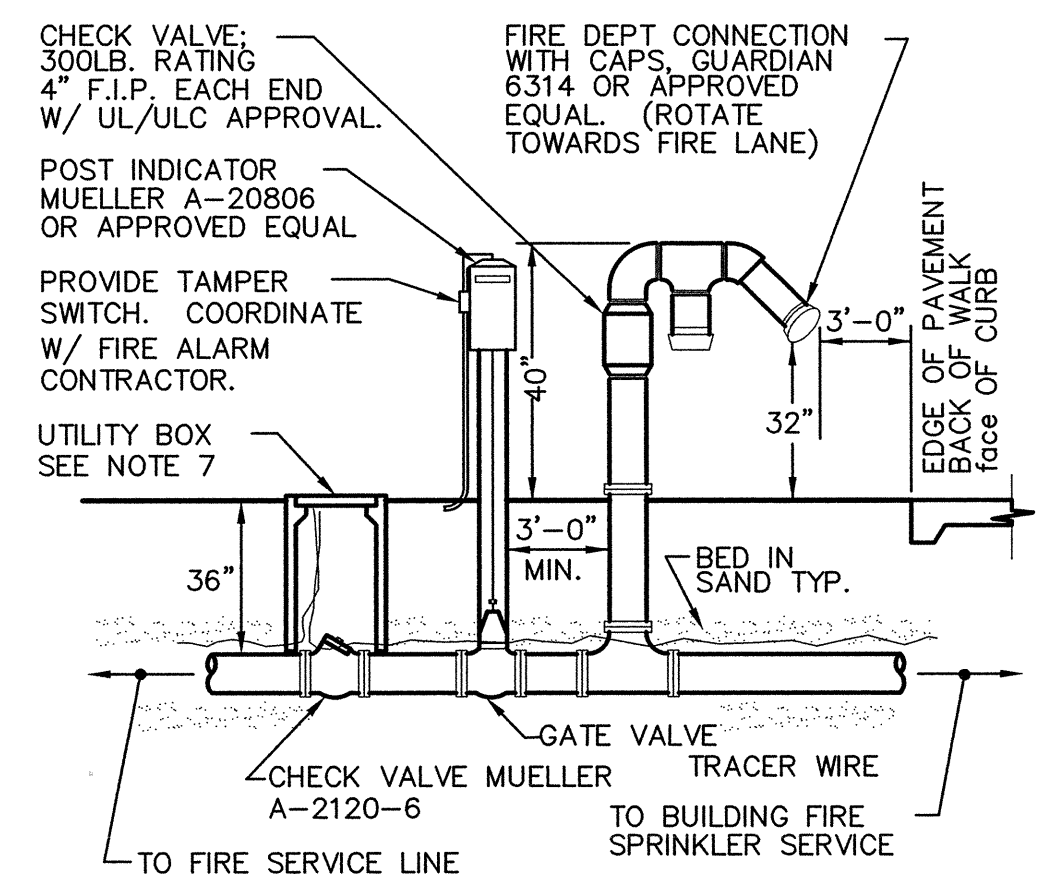


- FIRE DEPARTMENT NOTES
- THE INSTALLATION OF ALL ON-SITE FIRE PROTECTION SYSTEMS SHALL BE IN ACCORDANCE WITH N.F.P.A. 24 AND FIRE DEPARTMENT STANDARDS.
 - ALL ON-SITE FIRE PROTECTION SYSTEMS SHALL BE TESTED IN ACCORDANCE WITH THE REQUIREMENTS OF N.F.P.A. 24 AND SHALL BE WITNESSED BY THE FIRE DEPARTMENT. UNDERGROUND PIPING SHALL BE FLUSHED PER NFPA13 AND RISER STUB-UP IMMEDIATELY CAPPED.
 - THE INSTALLING CONTRACTOR, OR SUBCONTRACTOR, FOR ALL ON-SITE FIRE PROTECTION SYSTEMS SHALL NOTIFY THE FIRE DEPARTMENT AT LEAST 24 HOURS IN ADVANCE OF REQUESTING A DATE AND TIME FOR INSPECTIONS.
 - IF PLASTIC PIPE IS INSTALLED FOR FIRE PROTECTION SYSTEMS, THE PIPE SHALL BE C-900 CLASS 200.
 - AFTER INSTALLATION, RODS, NUTS, BOLTS, WASHERS, CLAMPS, AND OTHER RESTRAINING DEVICES, EXCEPT THRUST BLOCKS, USED ON ON-SITE FIRE PROTECTION SYSTEMS SHALL BE CLEANED AND THOROUGHLY COATED WITH A BITUMINOUS OR OTHER ACCEPTABLE CORROSION-RETARDING MATERIAL.
 - ALL PIPES AND FITTINGS SHALL BE WRAPPED PER N.F.P.A. 24 AND BEDDED IN SAND.
 - PROVIDE UTILITY BOX. FOR 4" - 6" VALVE CHRISTY N48, FOR 8" - 12" VALVE CHRISTY N52 OR APPROVED EQUAL. PROVIDE 12" MIN CHAIN WELDED TO LIDS AND BOLTED TO INSIDE OF BOX. LID SHALL BE TRAFFIC RATED IF WITHIN A TRAFFIC AREA.
 - PAINT 1" HIGH WHITE STENCILED LETTERING ON FDC STAND PIPE AND PIV INDICATING THE ADDRESS OF EACH BUILDINGS THE FDC AND PIV SERVES.

11
C6.1
FIRE DEPARTMENT CONNECTION ASSEMBLY
NO SCALE

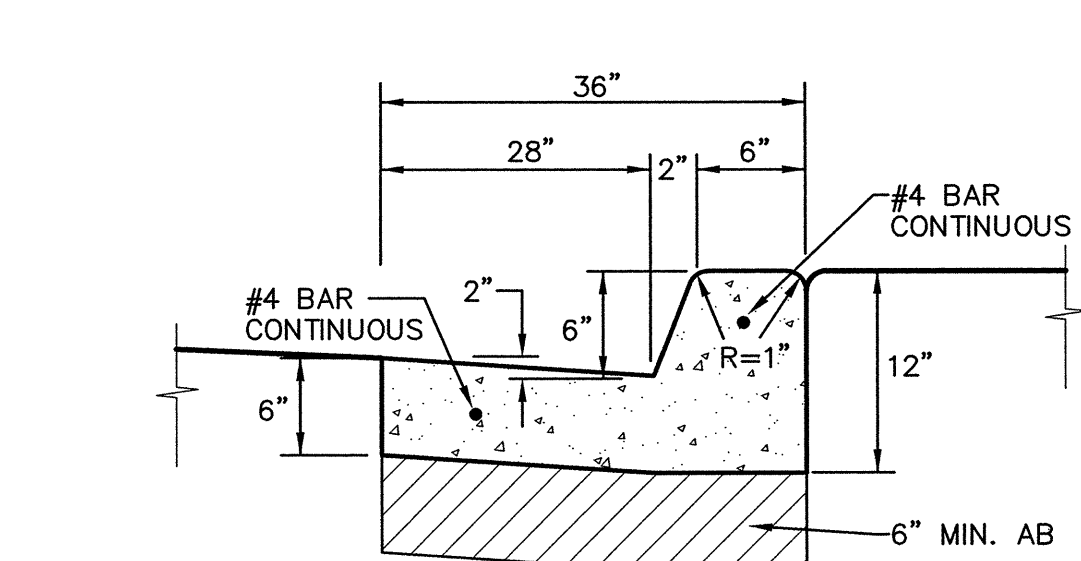


- NOTES:
- PROVIDE FELT EXPANSION JOINTS (E.J.) AT 60 FEET O.C. AND PROVIDE CONTROL JOINTS AT 10 FEET O.C., EXCEPT WHEN PLACING ADJACENT TO CONCRETE WALKS THE EXPANSION JOINTS SHALL ALIGN WITH THE EXPANSION JOINTS SHOWN FOR THE CONCRETE WALKS. SEAL E.J. WITH APPROVED JOINT SEALANT.
 - AT E.J. USE 1/2"x24" SMOOTH DOWELS, ALIGN WITH REBAR, GREASE 1/2 THE LENGTH BEFORE CONCRETE PLACEMENT.


5
C6.1
CONCRETE CURB AND GUTTER
NO SCALE

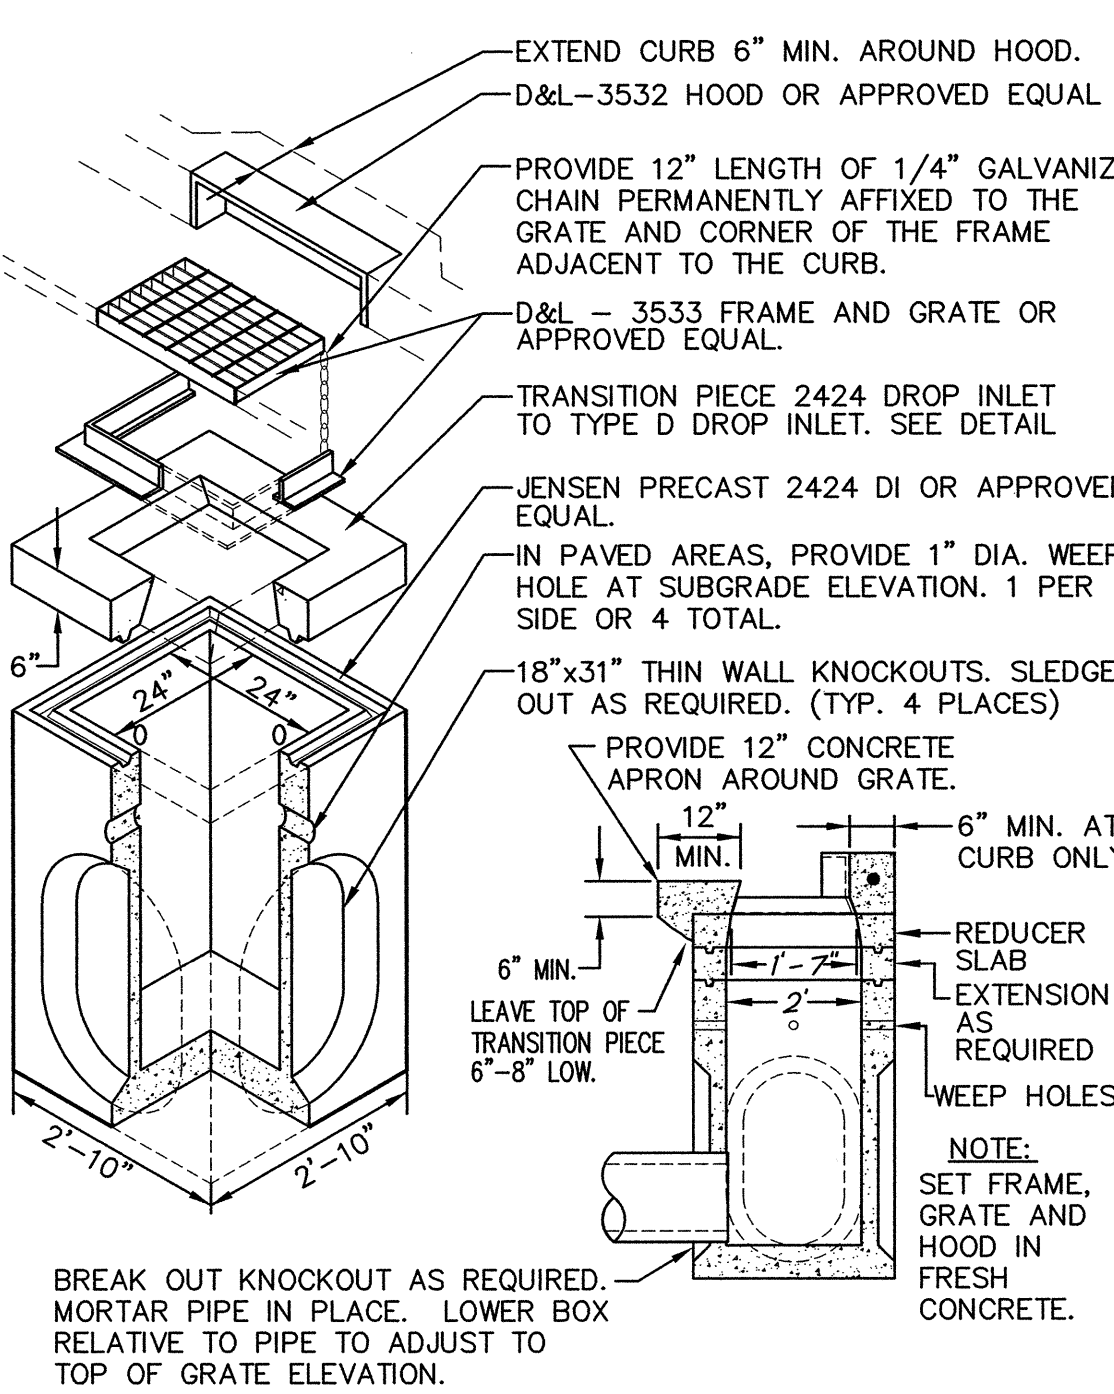

6
C6.1
CURB INLET
NO SCALE

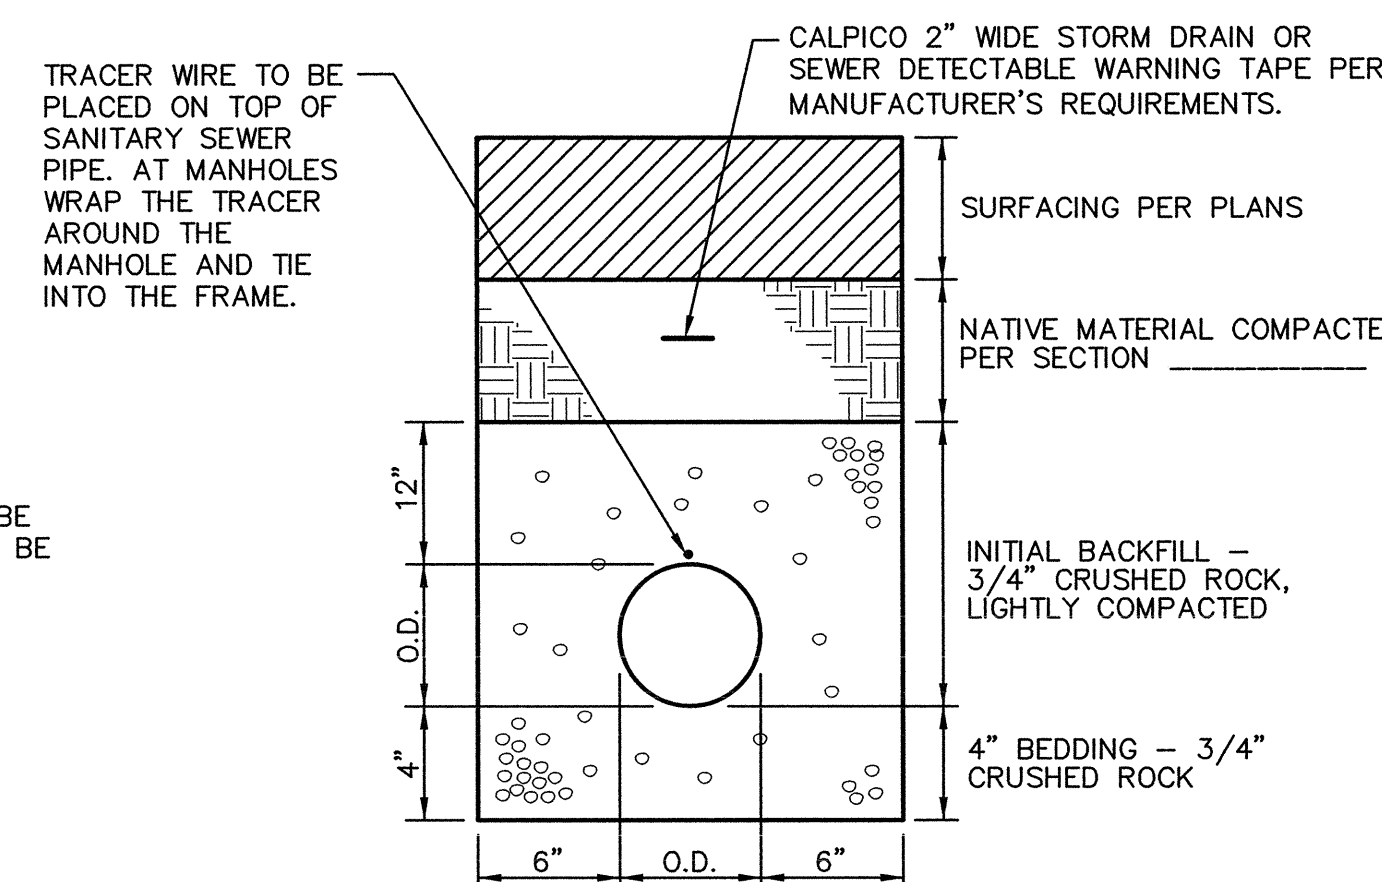


7
C6.1
STORM DRAIN AND SEWER TRENCH
NO SCALE

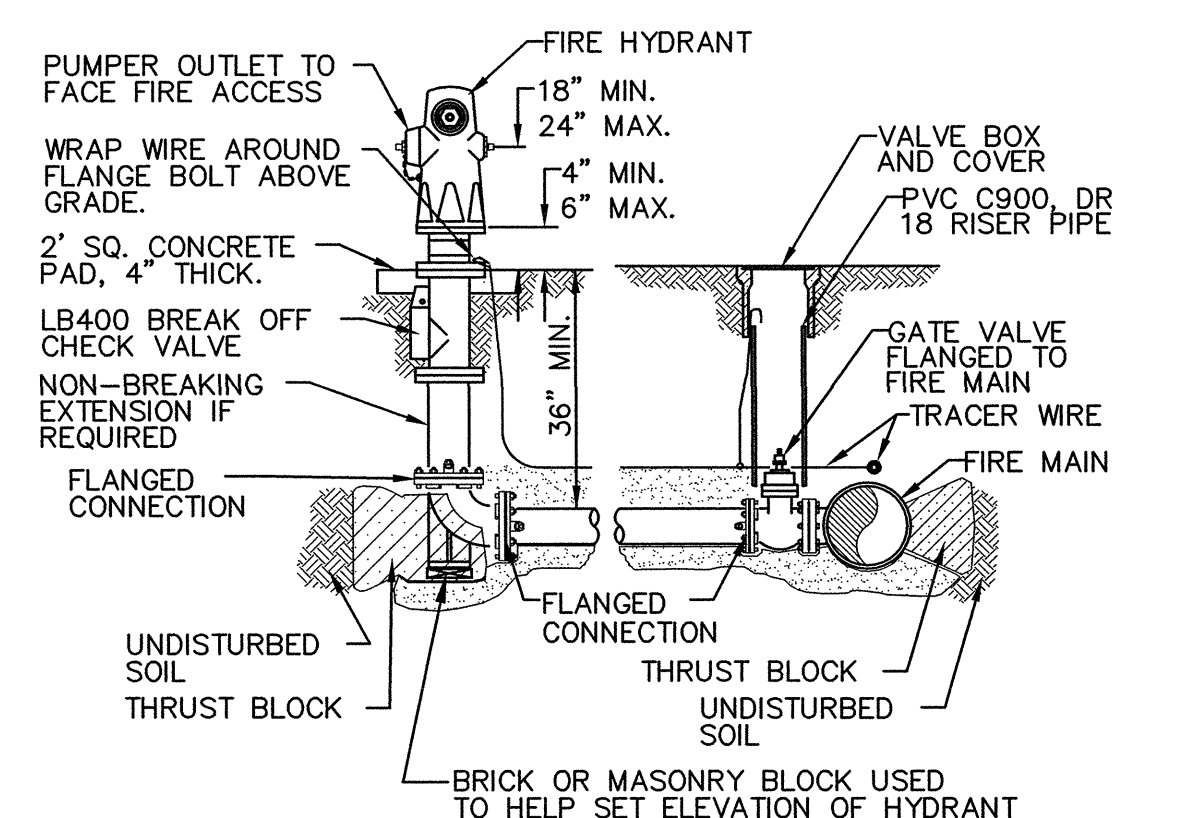




- NOTES:
- AFTER INSTALLATION OF RODS, NUTS, BOLTS, WASHERS, CLAMPS, AND OTHER RESTRAINING DEVICES, EXCEPT THRUST BLOCKS, CLEAN AND THOROUGHLY COAT ALL METAL SURFACES WITH A BITUMINOUS OR OTHER ACCEPTABLE CORROSION-RETARDING MATERIAL.
 - ALL PIPES AND FITTINGS SHALL BE WRAPPED AND BEDDED IN SAND.
 - IF HYDRANT IS LOCATED IN CONCRETE PAVING PROVIDE AN INDEPENDENT 4" MIN THICK, 3'X3' CONCRETE PAD SLOPED TO MATCH PAVEMENT GRADES.

8
C6.1
FIRE HYDRANT
NO SCALE

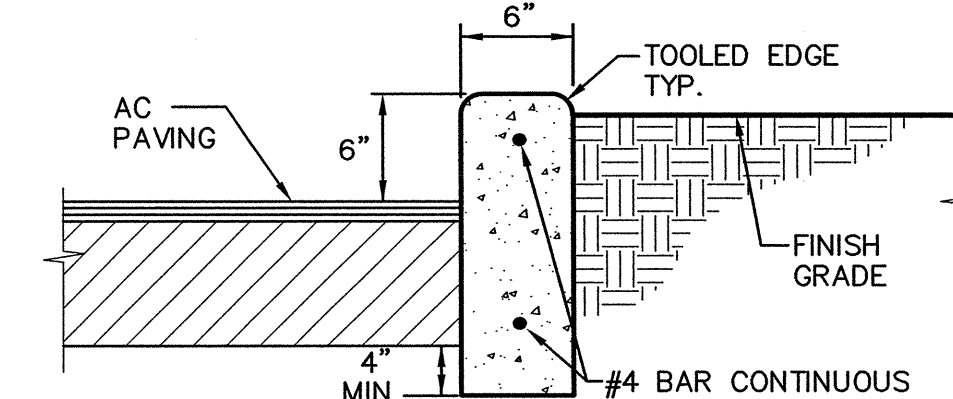

- NOTES:
- PROVIDE FELT EXPANSION JOINTS (E.J.) AT 60 FEET O.C. AND PROVIDE CONTROL JOINTS AT 10 FEET O.C., EXCEPT WHEN PLACING ADJACENT TO CONCRETE WALKS THE EXPANSION JOINTS SHALL ALIGN WITH THE EXPANSION JOINTS SHOWN FOR THE CONCRETE WALKS.
 - AT E.J. USE 1/2"x24" SMOOTH DOWELS, ALIGN WITH REBAR, GREASE 1/2 THE LENGTH BEFORE CONCRETE PLACEMENT.


1
C6.1
CONCRETE CURB
NO SCALE

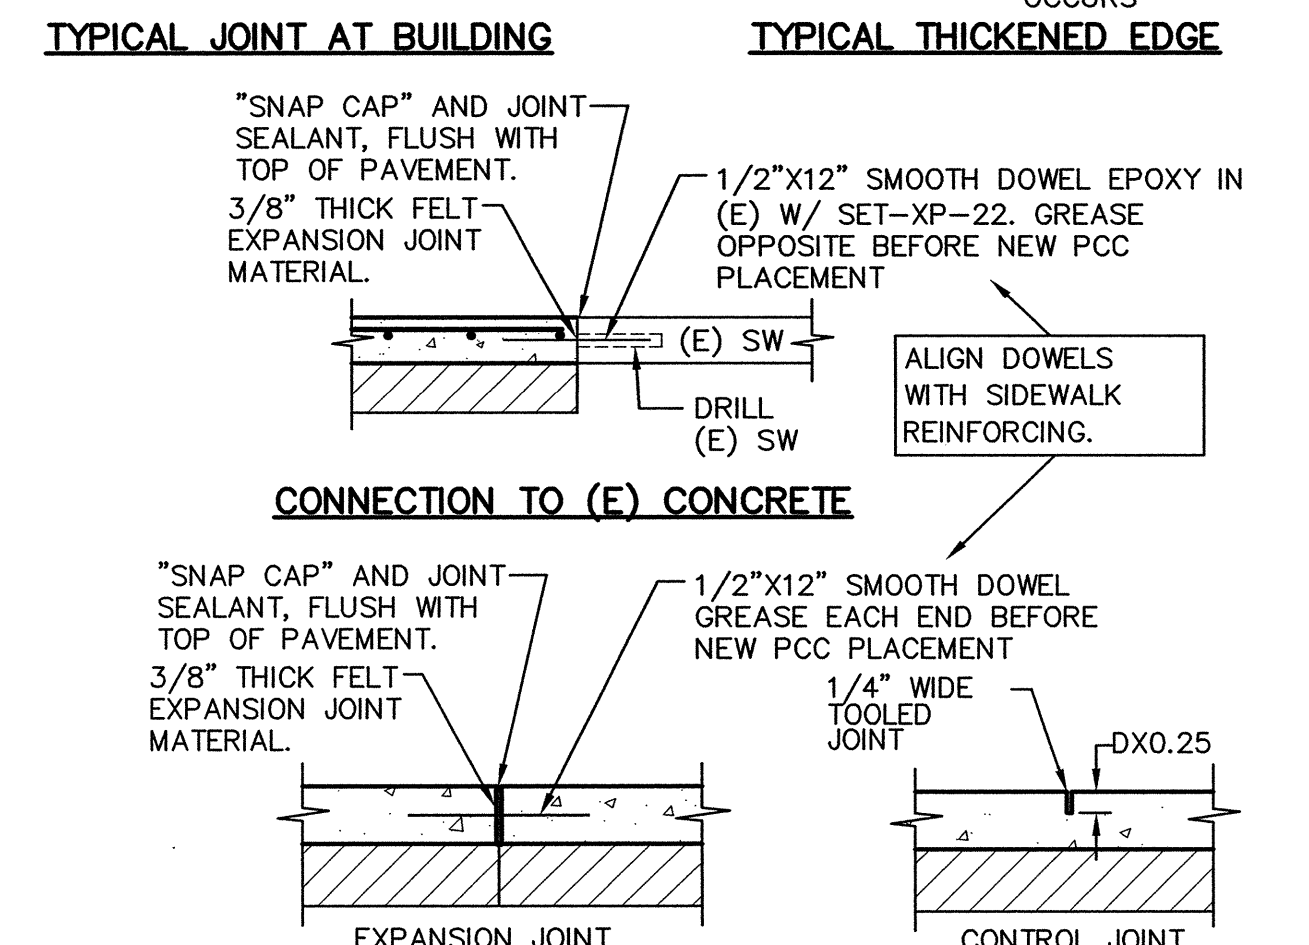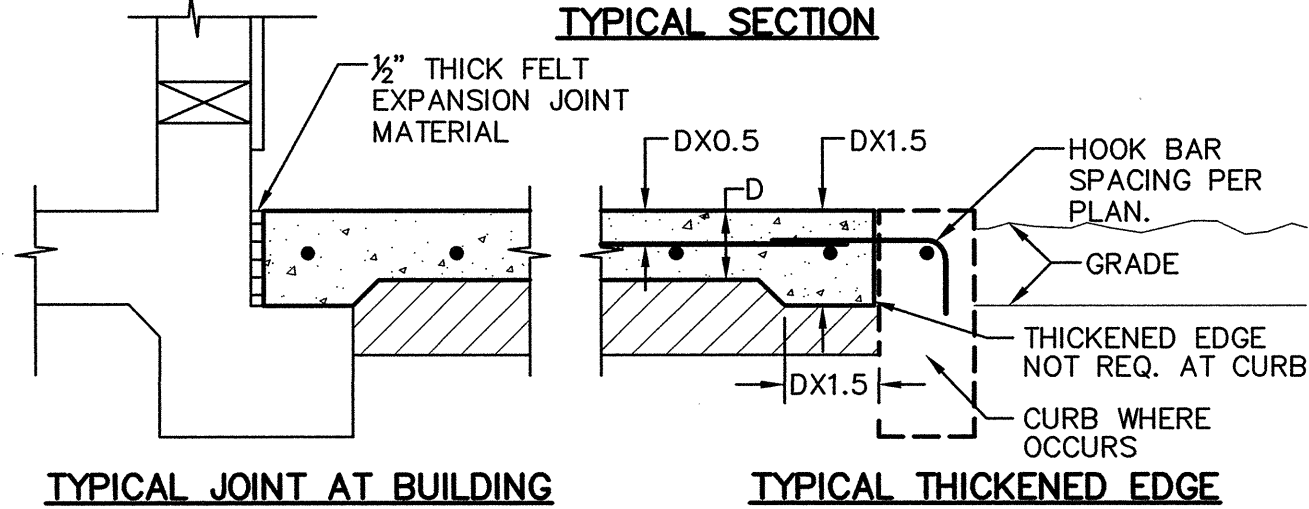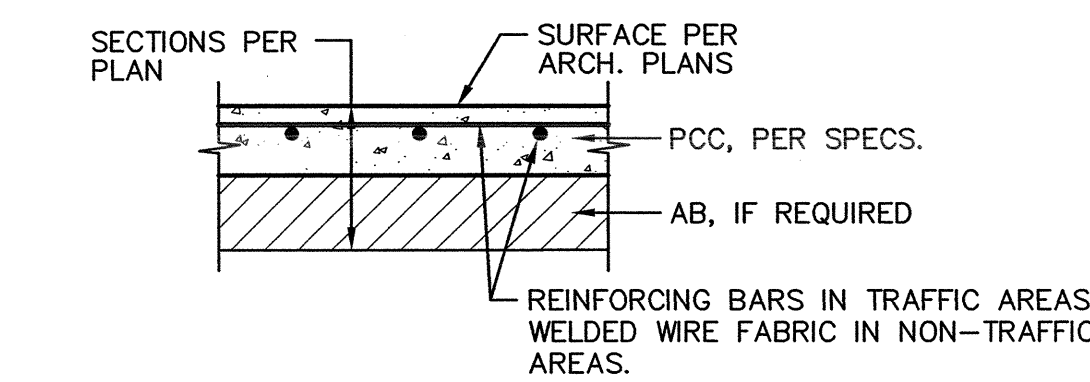


- NOTE:
- PROVIDE FELT EXPANSION JOINTS AT 20 FEET O.C. AND PROVIDE CONTROL JOINTS AT 10 FEET O.C.

2
C6.1
CONCRETE SIDEWALK
NO SCALE

- NOTE:
- PROVIDE 36" MIN. CLEARANCE TO FROM OBJECT BEING PROTECTED.
 - PLACE BOLLARDS IN A POSITION THAT DOES NOT INTERFERE WITH HOSE OUTLETS.
 - IF USING MULTIPLE BOLLARDS SPACING SHALL BE NO MORE THAN 4 FEET.

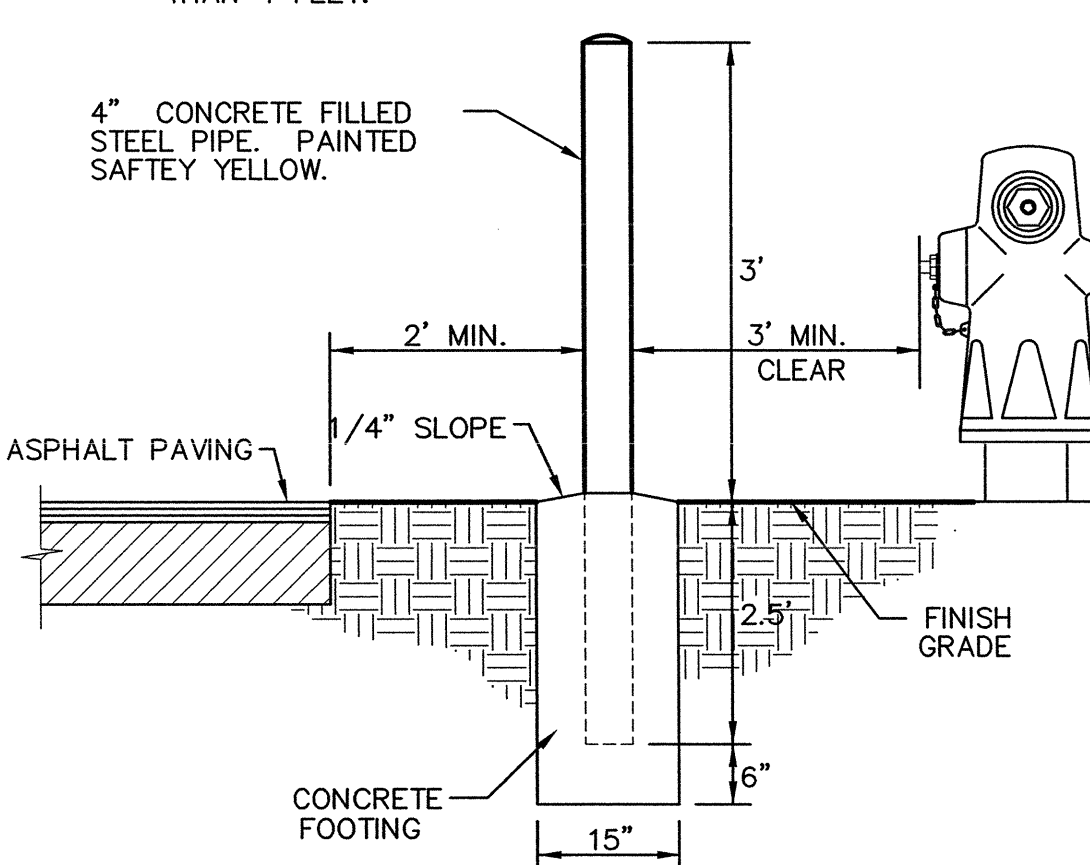

3
C6.1
PIPE BOLLARD
NO SCALE

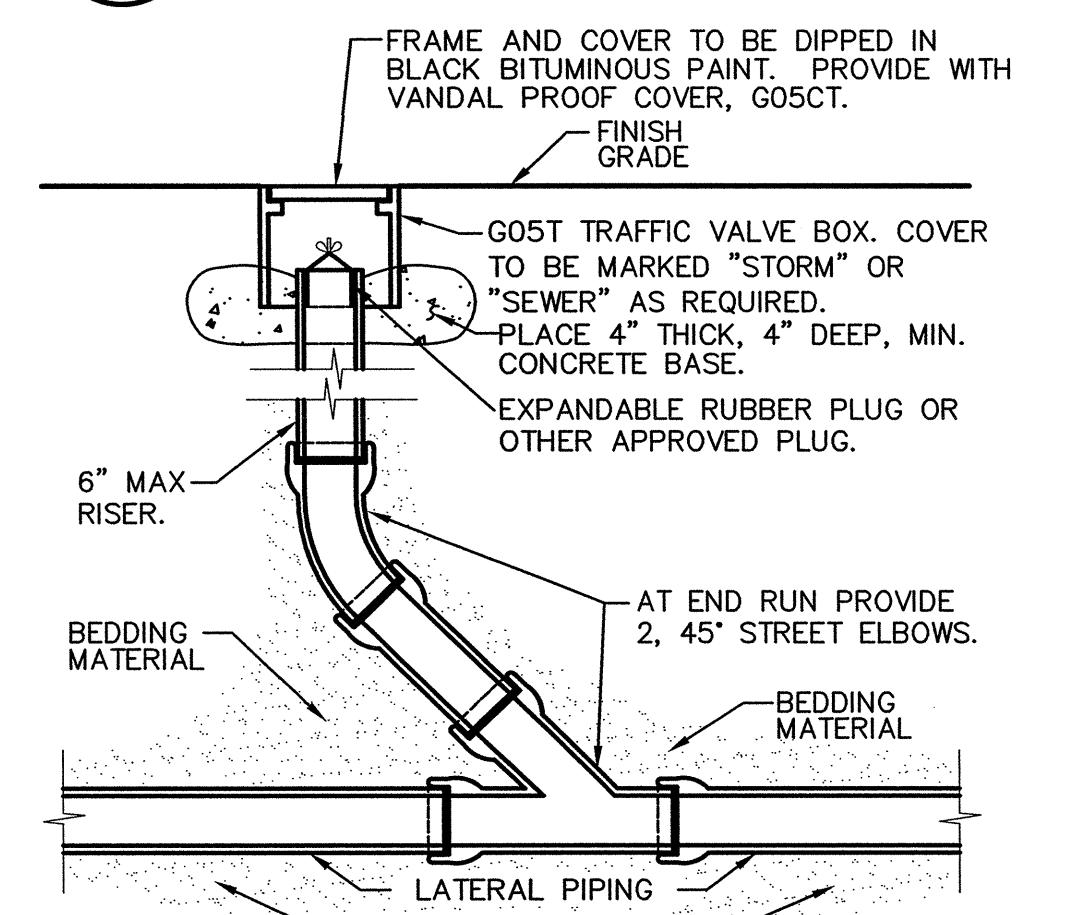

4
C6.1
CLEANOUT
NO SCALE

Dry Creek Joint Elementary School District District Education Center

8849 Cook Riolo Road, Roseville, CA 95747

Dry Creek Joint Elementary School District

FILE NO. 31-15

IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-115456
AC TM FLS 10/15/08
DATE 2/23/17


DIVISION OF THE STATE ARCHITECT

revision date: by:



WCE
WARREN CONSULTING ENGINEERS, INC.
1117 WINDFIELD WAY, SUITE 110
EL DORADO HILLS, CA 95672
CONSULTANT

nacht&lewis
600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtandlewis.com
916.329.4000

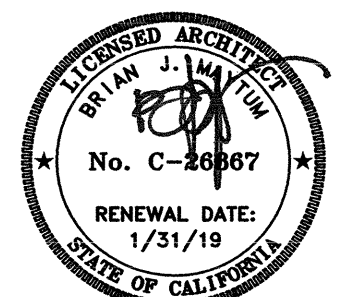

ARCHITECT

INITIAL BOX			
NO.	DWG BY	DATE	REVIEWED

REVISIONS			
NO.	DESCRIPTION	DATE	REV'D

DATE February 23, 2017
JOB NO. Y1538.00

SHEET TITLE



Details

SHEET NO.

C6.1

SHEET OF TOTAL

ONE INCH = TWENTY FEET
ONE-SIXTEENTH INCH = ONE FOOT
ONE-EIGHTH INCH = ONE FOOT
ONE-FOURTH INCH = ONE FOOT
ONE-HALF INCH = ONE FOOT
THREE-QUARTERS INCH = ONE FOOT
ONE INCH = ONE FOOT
ONE AND ONE-HALF INCH = ONE FOOT

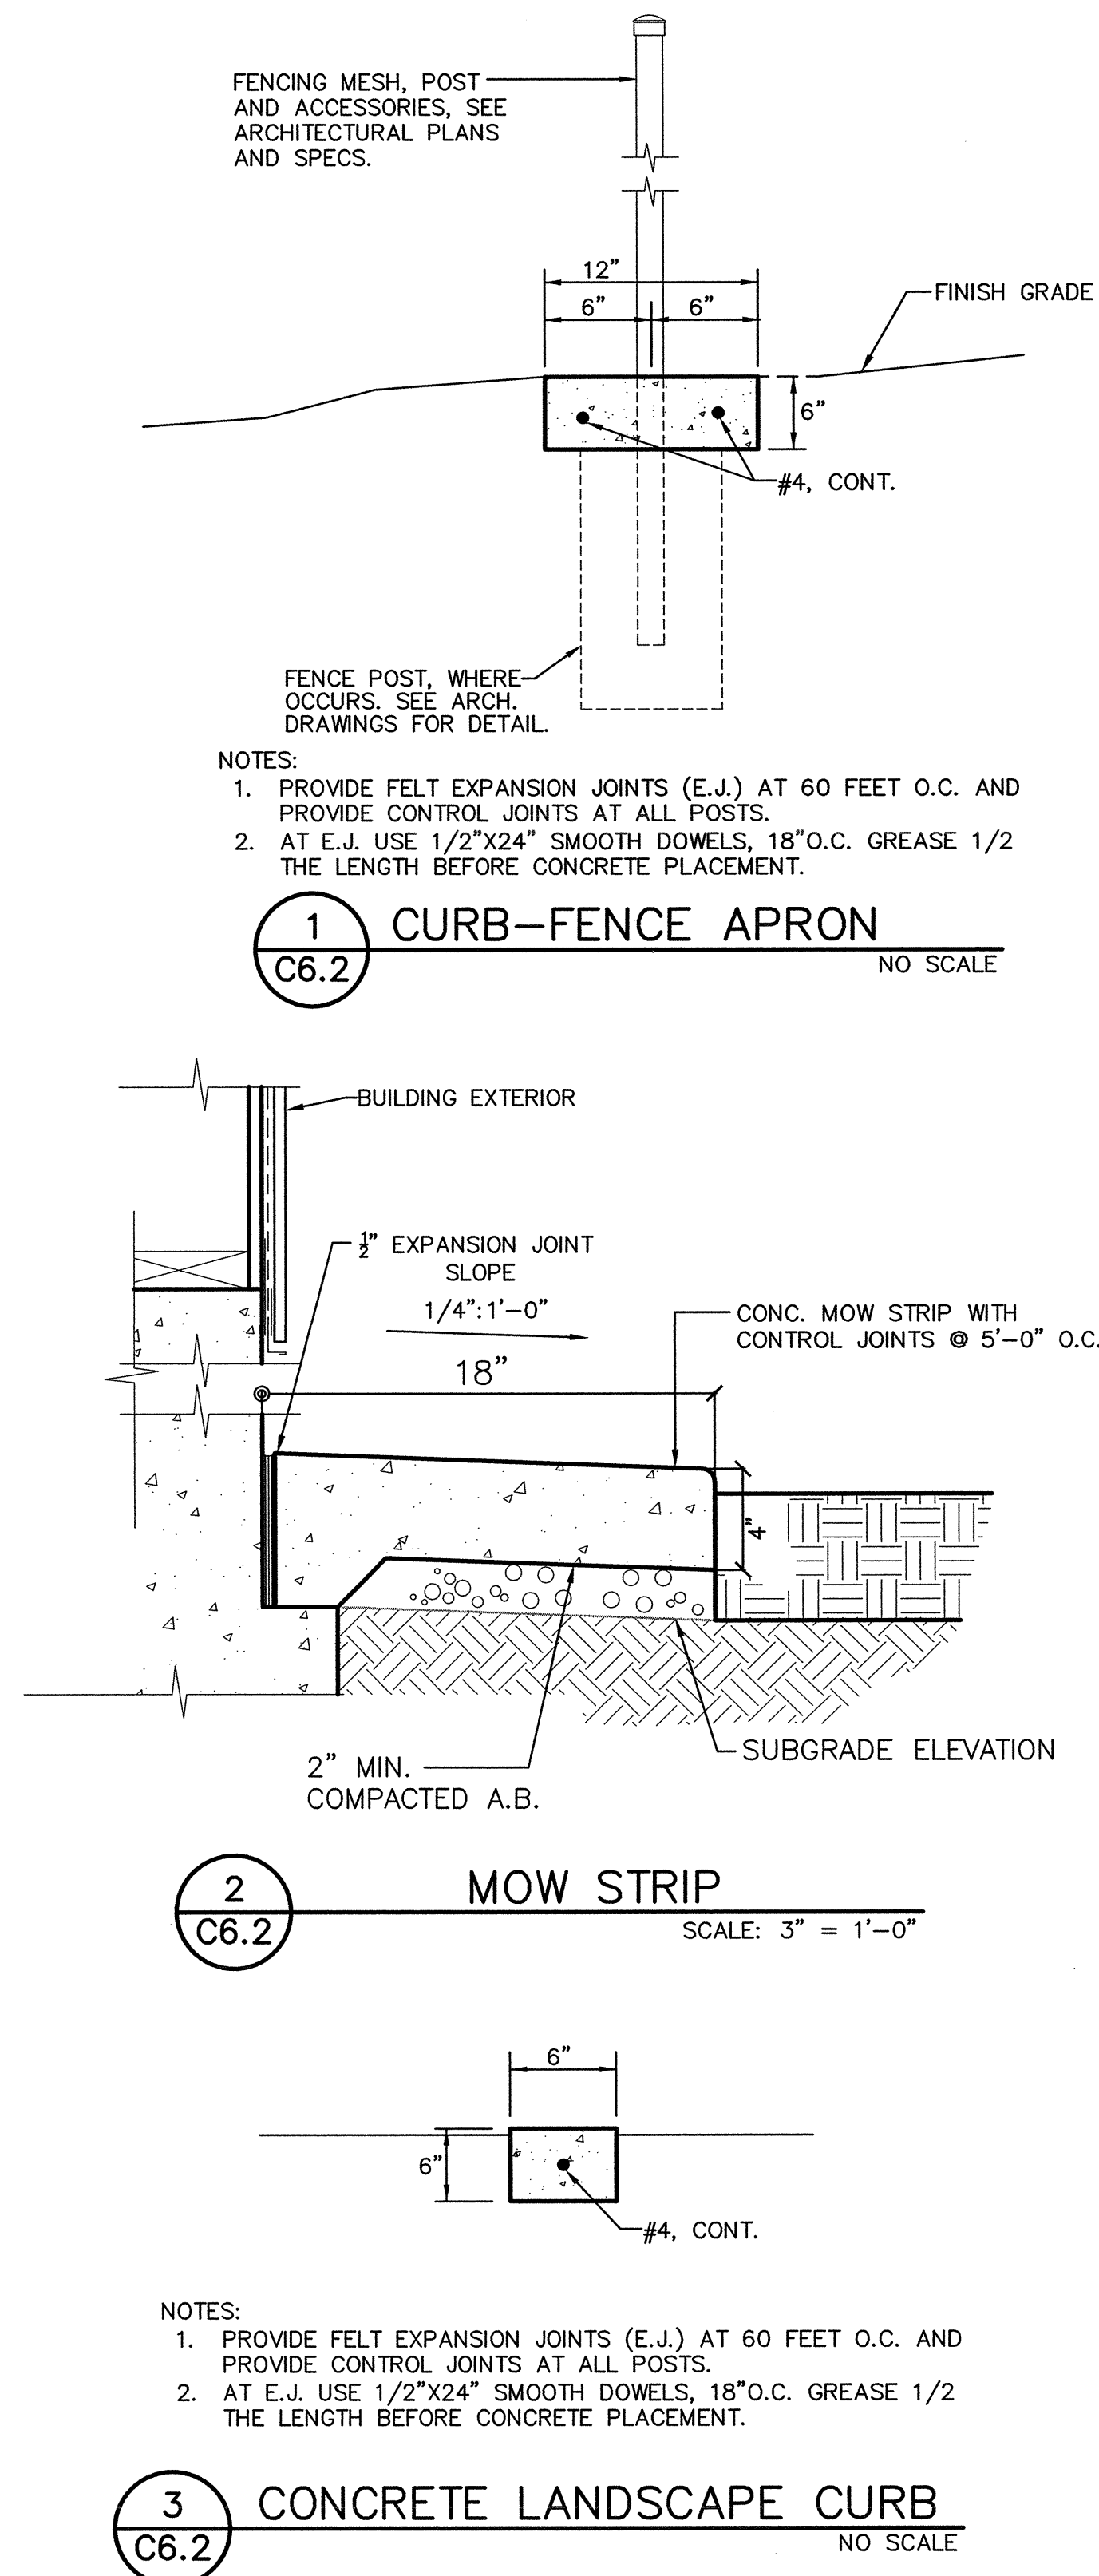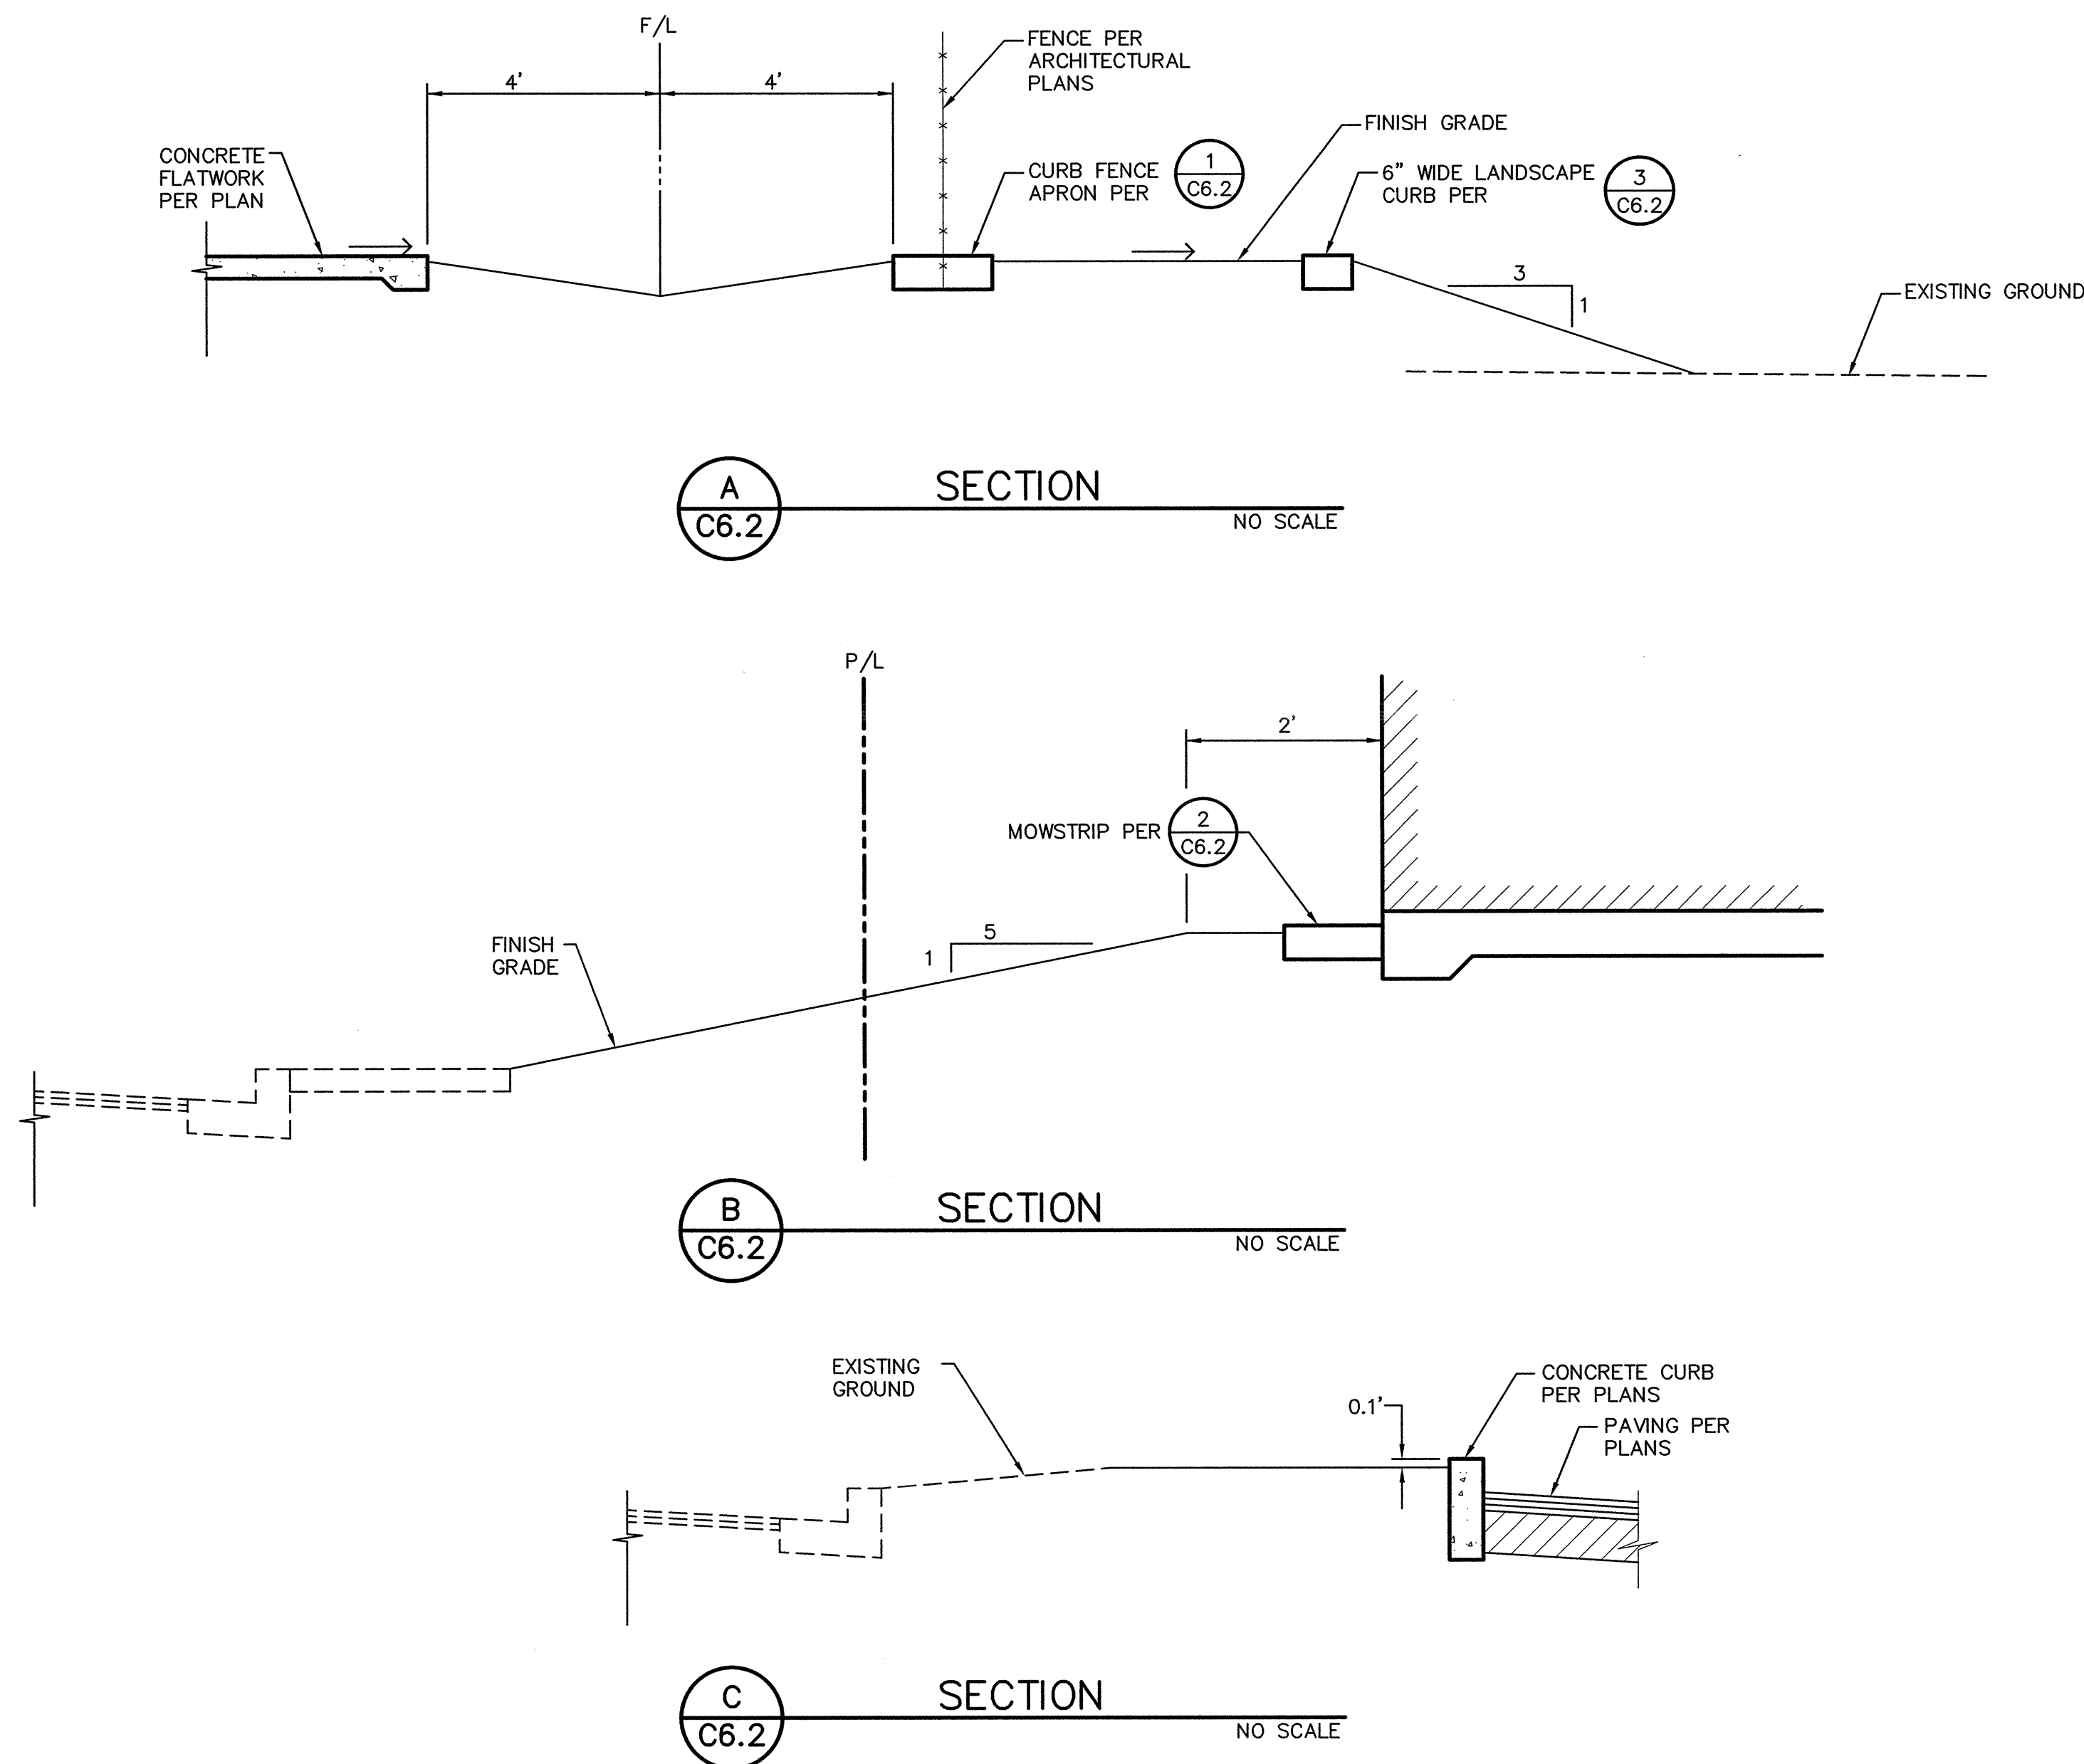

FENCING MESH, POST AND ACCESSORIES, SEE ARCHITECTURAL PLANS AND SPECS.

12" 6" 6" 6" FINISH GRADE #4, CONT.

FENCE POST, WHERE OCCURS, SEE ARCH. DRAWINGS FOR DETAIL.

NOTES:
1. PROVIDE FELT EXPANSION JOINTS (E.J.) AT 60 FEET O.C. AND PROVIDE CONTROL JOINTS AT ALL POSTS.
2. AT E.J. USE 1/2"x24" SMOOTH DOWELS, 18"O.C. GREASE 1/2 THE LENGTH BEFORE CONCRETE PLACEMENT.

1 C6.2 CURB-FENCE APRON NO SCALE

2 MIN. COMPACTED A.B. SUBGRADE ELEVATION

CONC. MOW STRIP WITH CONTROL JOINTS @ 5'-0" O.C.

1/4"x1'-0" 18" 2" EXPANSION JOINT SLOPE

BUILDING EXTERIOR

2 C6.2 MOW STRIP SCALE: 3" = 1'-0"

6" 6" #4, CONT.

NOTES:
1. PROVIDE FELT EXPANSION JOINTS (E.J.) AT 60 FEET O.C. AND PROVIDE CONTROL JOINTS AT ALL POSTS.
2. AT E.J. USE 1/2"x24" SMOOTH DOWELS, 18"O.C. GREASE 1/2 THE LENGTH BEFORE CONCRETE PLACEMENT.

3 C6.2 CONCRETE LANDSCAPE CURB NO SCALE

Dry Creek Joint Elementary School District
District Education Center

8849 Cook Riolo Road, Roseville, CA 95747
Dry Creek Joint Elementary School District

FILE NO. 31-15
IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-115456
AC TM FLS SS BR
DATE 2/23/17

DIVISION OF THE STATE ARCHITECT
revision date: by:

REGISTERED PROFESSIONAL ENGINEER
THOMAS E. PASSENDER
No. C48254
2/10/2017

WCE
WARREN CONSULTING ENGINEERS, INC.
1117 WINDFIELD WAY, SUITE 110
EL DORADO HILLS, CA 95672
CONSULTANT

nacht&lewis
600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtlewis.com
916.329.4000

REGISTERED ARCHITECT
No. C-80487
RENEWAL DATE:
1/31/18
STATE OF CALIFORNIA

ARCHITECT

INITIAL BOX			
NO.	DWG BY	DATE	REVIEWED

REVISIONS			
NO.	DESCRIPTION	DATE	REV
	100% design development	7/8/16	
	75% construction documents	9/20/16	
	DSA submittal	10/18/16	
	DSA approval	02/23/17	

DATE February 23, 2017
JOB NO. Y1538.00
SHEET TITLE
Details and Sections

SHEET NO.
C6.2
SHEET ___ OF ___ TOTAL

CONSULTANTARCHITECT

DATE February 23, 2017

SHEET NO. _____

SHEET ____ OF ____ TOTAL

STATE OF CALIFORNIA OUTDOOR LIGHTING CEC-NRCC-LTO-01-E (Revised 06/14)	
CERTIFICATE OF COMPLIANCE	
Project Name: DRY CREEK JOINT E.S. SCHOOL	Date prepared:
Project Address: 8849 COOK RIVEROAD, ROSEVILLE, CA 95747	
General Information Phase of Construction: ☐ New Construction ☐ Addition ☒ Renovation	
Outdoor Lighting Zone (OLZ) ☐ OLZ-1 ☐ OLZ-2 ☐ OLZ-3	
I have confirmed with the AUI which OLZ applies to this site. For default lighting see Title 24 Part 6, 110-114.	
LIGHTING COMPLIANCE DOCUMENTS (check box for each document included)	
For detailed instructions on the use of this and all Energy Efficiency Standards or Nonresidential Manual published by the California Energy Commission.	
☒ Certificate of Compliance	
☒ NRCC-LTO-02-E Outdoor Lighting Controls Certificate of Compliance	
☒ NRCC-LTO-03-E Outdoor Lighting Power Allowance Certificate of Compliance	
Summary of Allowed Outdoor Lighting Power	
1. Sum Total ALLOWED Outdoor Lighting Wattage from NRCC-LTO-03-E, Page	_____
Complexes ONLY if Installed < Allowed	
2. Sum Total INSTALLED Outdoor Lighting Wattage from NRCC-LTO-01-E, Page	_____
Declaration of Required Installation Certificates – Declare by checking will be submitted. (Retain copies and verify forms are completed and signed.)	
☐ NRCC-LTO-01-E – Must be submitted for all buildings.	
☐ NRCC-LTO-02-E – Must be submitted for a lighting control system, or for an Energy Management Control System (EMCS), to be recognized for compliance.	
Declaration of Required Certificates of Acceptance – Declare by checking Acceptance that will be submitted. (Retain copies and verify forms are completed.)	
☐ NRCC-LTO-02-A – Must be submitted for outdoor lighting controls.	


CALIFORNIA ENERGY COMMISSION NRCC-LTO-01-E (Page 1 of 4)	STATE OF CALIFORNIA OUTDOOR LIGHTING CEC-NRCC-LTO-01-E (Revised 06/14)																						
CALIFORNIA ENERGY COMMISSION NRCC-LTO-01-E (Page 2 of 4)																							
CERTIFICATE OF COMPLIANCE Outdoor Lighting Project Name: DRY CREEK JOINT E.S. SCHOOL																							
Date prepared: 10/18/16																							
Schedule of luminaires exempt from the outdoor lighting power requirements in §140.7 <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Name or Symbol</th> <th>Description of exempt luminaires in accordance with the exemptions.</th> </tr> </thead> <tbody> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> </tbody> </table>		Name or Symbol	Description of exempt luminaires in accordance with the exemptions.																				
Name or Symbol	Description of exempt luminaires in accordance with the exemptions.																						
Schedule of luminaires exempt from the outdoor lighting power requirements in §140.7(c) <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Name or Symbol</th> <th>Description of exempt luminaires in accordance with the exemptions.</th> </tr> </thead> <tbody> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> </tbody> </table>		Name or Symbol	Description of exempt luminaires in accordance with the exemptions.																				
Name or Symbol	Description of exempt luminaires in accordance with the exemptions.																						
Schedule of luminaires exempt from the outdoor lighting control requirements in §150.2(c) <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Name or Symbol</th> <th>Description of exempt luminaires in accordance with the exemptions.</th> </tr> </thead> <tbody> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> </tbody> </table>		Name or Symbol	Description of exempt luminaires in accordance with the exemptions.																				
Name or Symbol	Description of exempt luminaires in accordance with the exemptions.																						

NOT USED

STATE OF CALIFORNIA OUTDOOR LIGHTING OS-NRCC-LTD-01-E (Revised 06/14)						CALIFORNIA ENERGY COMMISSION					
CERTIFICATE OF COMPLIANCE						NRCC-LTD-01-E					
Outdoor Lighting						(Page 3 of 4)					
Project Name: DRY CREEK JOINT ELEMENTARY SCHOOL DISTRICT						Date prepared: 10/18/16					
A. OUTDOOR LIGHTING SCHEDULE AND FIELD INSPECTION ENERGY CHECKLIST											
Luminaire Schedule			Installed Watts			Location			Cutoff	Field Inspector	
A	B	C	D	E	F	G	H	I	J	K	
Wattage Schedule	Luminaire Description	Initial Hours Per Week	How wattage was determined: SPL or (C) or (E) or Manufacturer's Data	Estimated Wattage (W x H x D) (ft ²) (lumens per ft ²)	Primary Function area in which these luminaires are installed	SFC Rating	Beam	Foot Candle			
A	LED (COMPLETE LUMINAIRE POLE LT.)	209	X	□	9	1,881	PARKING LOT & WALKWAY	--	□	□	
B	LED (EXTERIOR POLE LIGHT)	65	X	□	2	130	NEXT TO BLDG.	--	□	□	
N	LED (EXTERIOR WALL MOUNTED)	27	X	□	15	405	EXTERIOR WALL MOUNTED	--	□	□	
P	LED (EXTERIOR COLUMN MOUNTED)	15	X	□	6	90	PUBLIC ENTRY	--	□	□	
INSTALLED WATTS PAGE TOTAL:			2,506W			Enter sum total of all pages (Sum Total INSTALLED Outdoor lighting watts) into NRCC-LTD-01-E, Page 1			2,506 Watts		

CA Building Energy Efficiency Standards – 2013 Nonresidential Compliance June 2014

STATE OF CALIFORNIA OUTDOOR LIGHTING CE-MRDC-L10-01-e (Revised 08/14)		CALIFORNIA ENERGY COMMISSION NRCC-L10-01-E (Page 4 of 4)	
CERTIFICATE OF COMPLIANCE Outdoor Lighting Project Name: DRY CREEK JOINT ELEMENTARY SCHOOL DISTRICT		Date prepared: 10/18/16	
DOCUMENTATION AUTHOR'S DECLARATION STATEMENT 1. I certify that this Certificate of Compliance documentation is accurate and complete. Documentation Author Name: DAVID K. YU			
Company: HARRY A. YEE & ASSOCIATES, INC Address: 4920 FREEMONT BLVD., SUITE D City/State/Zip: SACRAMENTO, CA 95822		Signature Date: 2/22/17 CEACHERS Certification (if applicable): Phone: (916) 454-5319	
RESPONSIBLE PERSON'S DECLARATION STATEMENT I certify the following under penalty or perjury, under the laws of the State of California: 1. The information provided on this Certificate of Compliance is true and correct. 2. I am eligible under Division 3 of the Business and Professions Code to accept responsibility for the building design or system design identified on this Certificate of Compliance (Responsible Designee). 3. The energy features and performance specifications, materials, components, and manufactured devices for the building design or system design identified on this Certificate of Compliance conform to the requirements of Title 24, Part 1 and Part 6 of the California Code of Regulations. 4. The building design features or system design features identified on this Certificate of Compliance are consistent with the information provided on other applicable compliance documents, worksheets, calculations, plans and specifications submitted to the enforcement agency for approval with this building permit application. 5. I will ensure that a completed signed copy of this Certificate of Compliance shall be made available with the building permit(s) issued for the building, and made available to the enforcement agency for all applicable inspections. I understand that a completed signed copy of this Certificate of Compliance is required to be included with the documentation the builder provides to the building owner or occupancy.			
Responsible Designer Name: DAVID K. YU Company: HARRY A. YEE & ASSOCIATES, INC Address: 4920 FREEMONT BLVD., SUITE D City/State/Zip: SACRAMENTO, CA 95822		Responsible Designer Signature: Date Signed: 2/22/17 License: E14987 Phone: (916) 454-5319	

RESPONSE/NOTICE TO: SACRAMENTO, CA 95822		PHONE: (916) 454-5319	
RESPONSE PERSON'S DESIGNATION/ SIGNATURE			
I certify the following under penalty or perjury under the laws of the State of California: - The information provided on this Certification of Compliance is true and correct. - I am eligible under Division 3 of the Business and Professions Code to accept responsibility for the building design or system design identified on this Certificate of Compliance (Responsible Designer). - The energy features and performance specifications, materials, components, and manufactured devices for the building design or system design on this Certificate of Compliance conform to the requirements of Title 24, Part 1 and Part 6 of the California Code of Regulations. - The building design features or system design features identified on this Certificate of Compliance are consistent with the information provided on applicable compliance documents, worksheets, calculations, plans and specifications submitted to the enforcement agency for approval with permit application. - I will ensure that a completed signed copy of this Certificate of Compliance shall be made available with the building permit(s) issued for and made available to the enforcement agency at all applicable inspections. I understand that a completed signed copy of this Certificate is required to be included with the documentation the builder provides to the building owner of occupancy.			
Responsible Designer Name: DAVID K. YU		Responsible Designer Signature: 	
Company: HARRY A. YEE & ASSOCIATES, INC		Date Signed: 2/22/17	
Address: 4920 FREEDORT BLVD., SUITE D		Licenses: E14987	
City/State/Zip: SACRAMENTO, CA 95822		Phone: (916) 454-5319	


Dry Creek Joint Elementary School District
District Education Center

8849 Cook Riolo Road, Roseville, CA 95747

Dry Creek Joint Elementary School District

The seal is circular with a double border. The outer border contains the text "REGISTERED ARCHITECT" at the top and "STATE OF CALIFORNIA" at the bottom. Inside the border is a smaller circle containing a stylized figure of an architect standing next to a building. Below the figure, the text "No. C-20887" and "Renewal Date: 1/31/19" are printed.

PLUT DATE: 02/22/17
ONE INCH = TWENTY FEET
ONE-SIXTEENTH INCH = ONE FOOT
ONE-EIGHTH INCH = ONE FOOT
ONE-FOURTH INCH = ONE FOOT
ONE-HALF INCH = ONE FOOT
THREE-QUARTERS INCH = ONE FOOT
ONE INCH = ONE FOOT
ONE AND ONE-HALF INCH = ONE FOOT

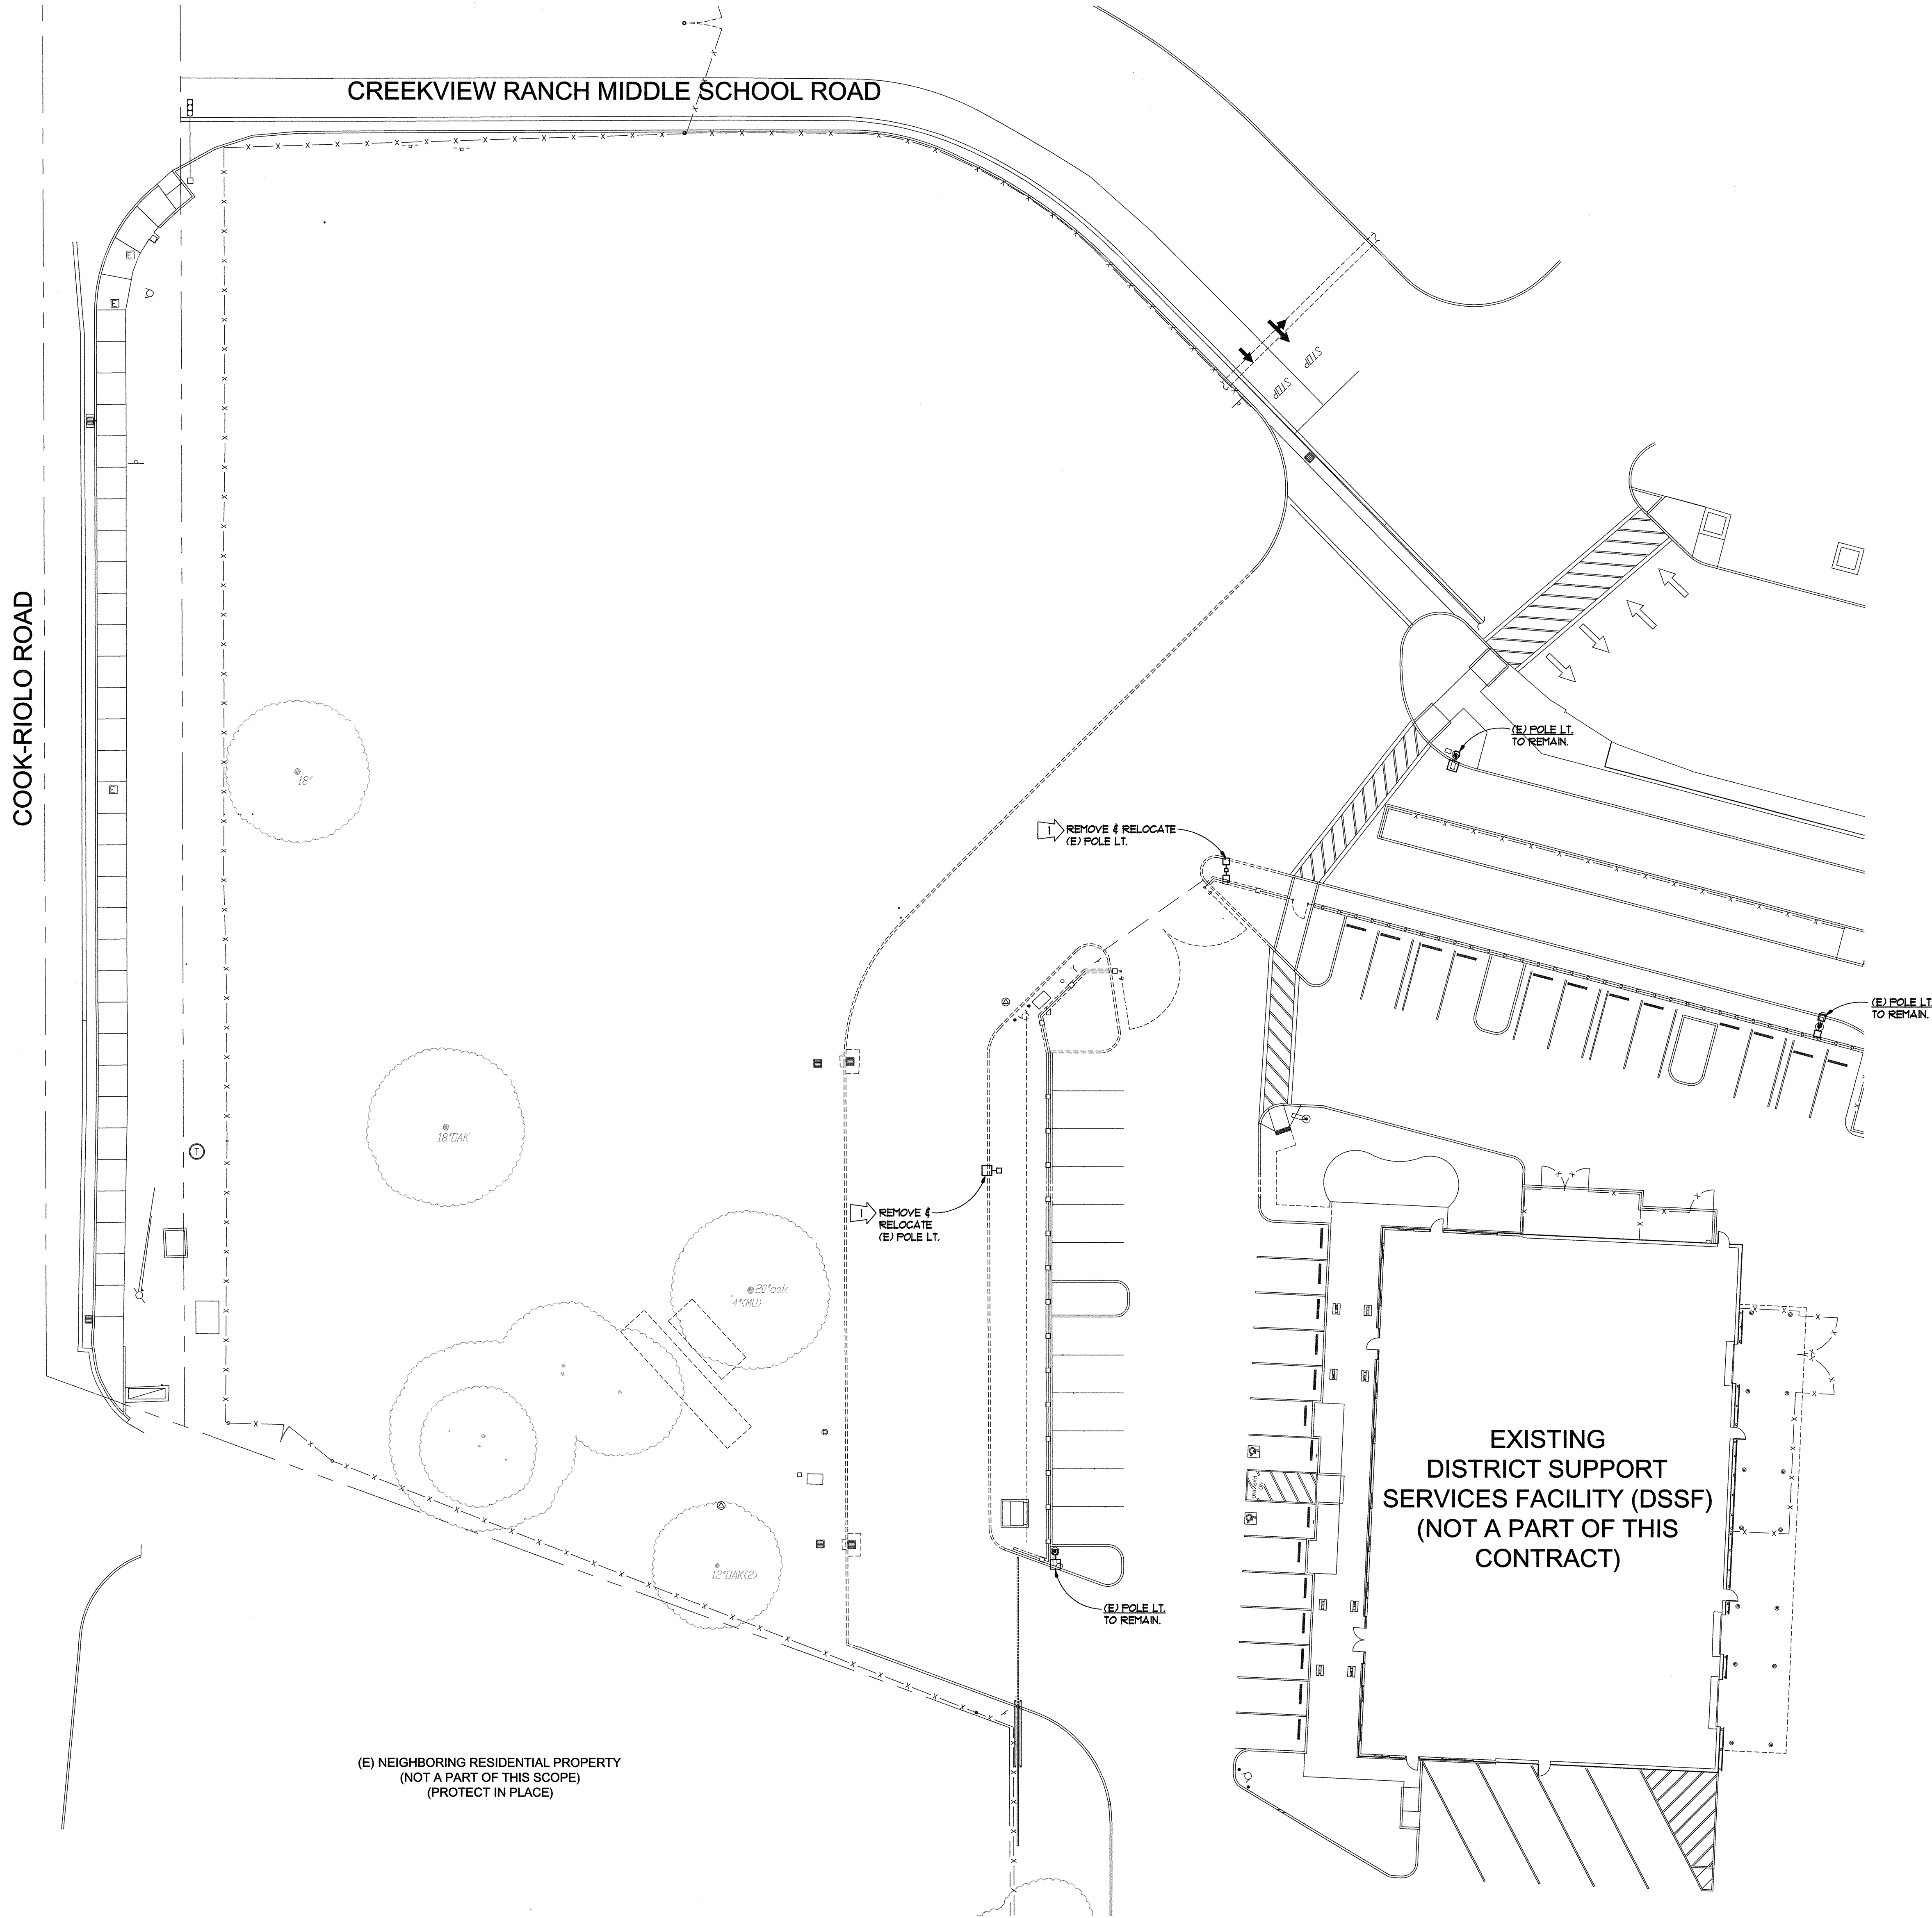

CONSTRUCTION NOTES:
REMOVE & RELOCATE (E) POLE LT. INCLUDING BASE. PROVIDE
FULL BOX TO INTERCEPT CONDUIT & WIRES. SEE SHEET E1.2.

Dry Creek Joint Elementary School District
District Education Center
8849 Cook Riolo Road, Roseville, CA 95747
Dry Creek Joint Elementary School District

FILE NO. 31-15
IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-115456
AC. TM FLS DATE SS 1/19
DATE 2/23/17


DIVISION OF THE STATE ARCHITECT
revision date: by:

HARRY A. YEE & ASSOCIATES, INC.
ELECTRICAL ENGINEERS
4920 FREEDOM BLVD., SUITE D
SACRAMENTO, CALIFORNIA 95822
TEL: 916.454.5319
FAX: 916.454.4117
HVA Job #1602



CONSULTANT

nacht&lewis
800 Q Street, Suite 100
Sacramento, CA 95811
www.nachtandlewis.com
916.329.4000

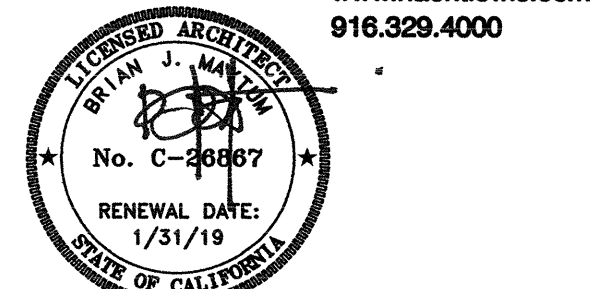

ARCHITECT

INITIAL BOX			
NO.	DWG BY	DATE	REVIEWED

REVISIONS			
NO.	DESCRIPTION	DATE	REV'D
	100% design development	7/9/16	
	75% construction documents	9/20/16	
	DSA submittal	12/9/16	
	DSA approval	02/23/17	

DATE February 23, 2017

JOB NO. Y1538.00


SHEET TITLE

Demolition
Site Plan

SHEET NO.

E1.1

SHEET ____ OF ____ TOTAL

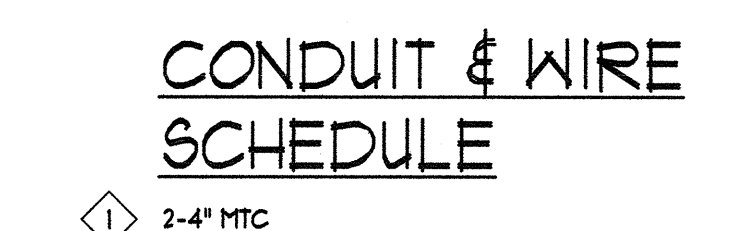

CONSTRUCTION NOTES:

1. VERIFY EXACT LIGHT FIXTURE LOCATION TO AVOID CONFLICT WITH MECHANICAL EQUIPMENT & DUCTWORK.
2. VERIFY EXACT LIGHT OCCUPANCY SENSOR LOCATION TO AVOID CONFLICT WITH MECHANICAL EQUIPMENT & DUCTWORK.
3. SOLATUBE (20V/18 N.I.E.S. CONNECT AS REQUIRED.
4. SOLATUBE CONTROL N.I.E.S. CONNECT AS REQUIRED.
5. POLE LIGHT & BASE LOCATED IN PATIO PAYING, SEE 12/A02 FOR LOCATION.
6. INSTALL LIGHT FIXTURE IN MOOD SLAT CEILING. COORDINATE WITH ARCHITECT.

CONDUIT & WIRE SCHEDULE:

1. 1-1" MTC.



NOTES:

1. SEE ARCHITECTURAL REFLECTED CEILING PLAN, INTERIOR AND EXTERIOR ELEVATIONS FOR EXACT LIGHT FIXTURE LOCATION.
2. COORDINATE OFFICE T-BAR & LIGHT FIXTURE WITH ARCHITECT, SEE DETAIL 1/A21.
3. LIGHT FIXTURE LOW VOLTAGE CONTROL WIRING IS NOT SHOWN. PROVIDE ALL WIRING AS SHOWN ON THE LIGHTING CONTROL SYSTEM WIRING DIAGRAM (E2E1) & AS REQUIRED.

MECHANICAL ATTIC LIGHTING FLOOR PLAN

B
E2.1


SCALE: 1/8" = 1'-0"

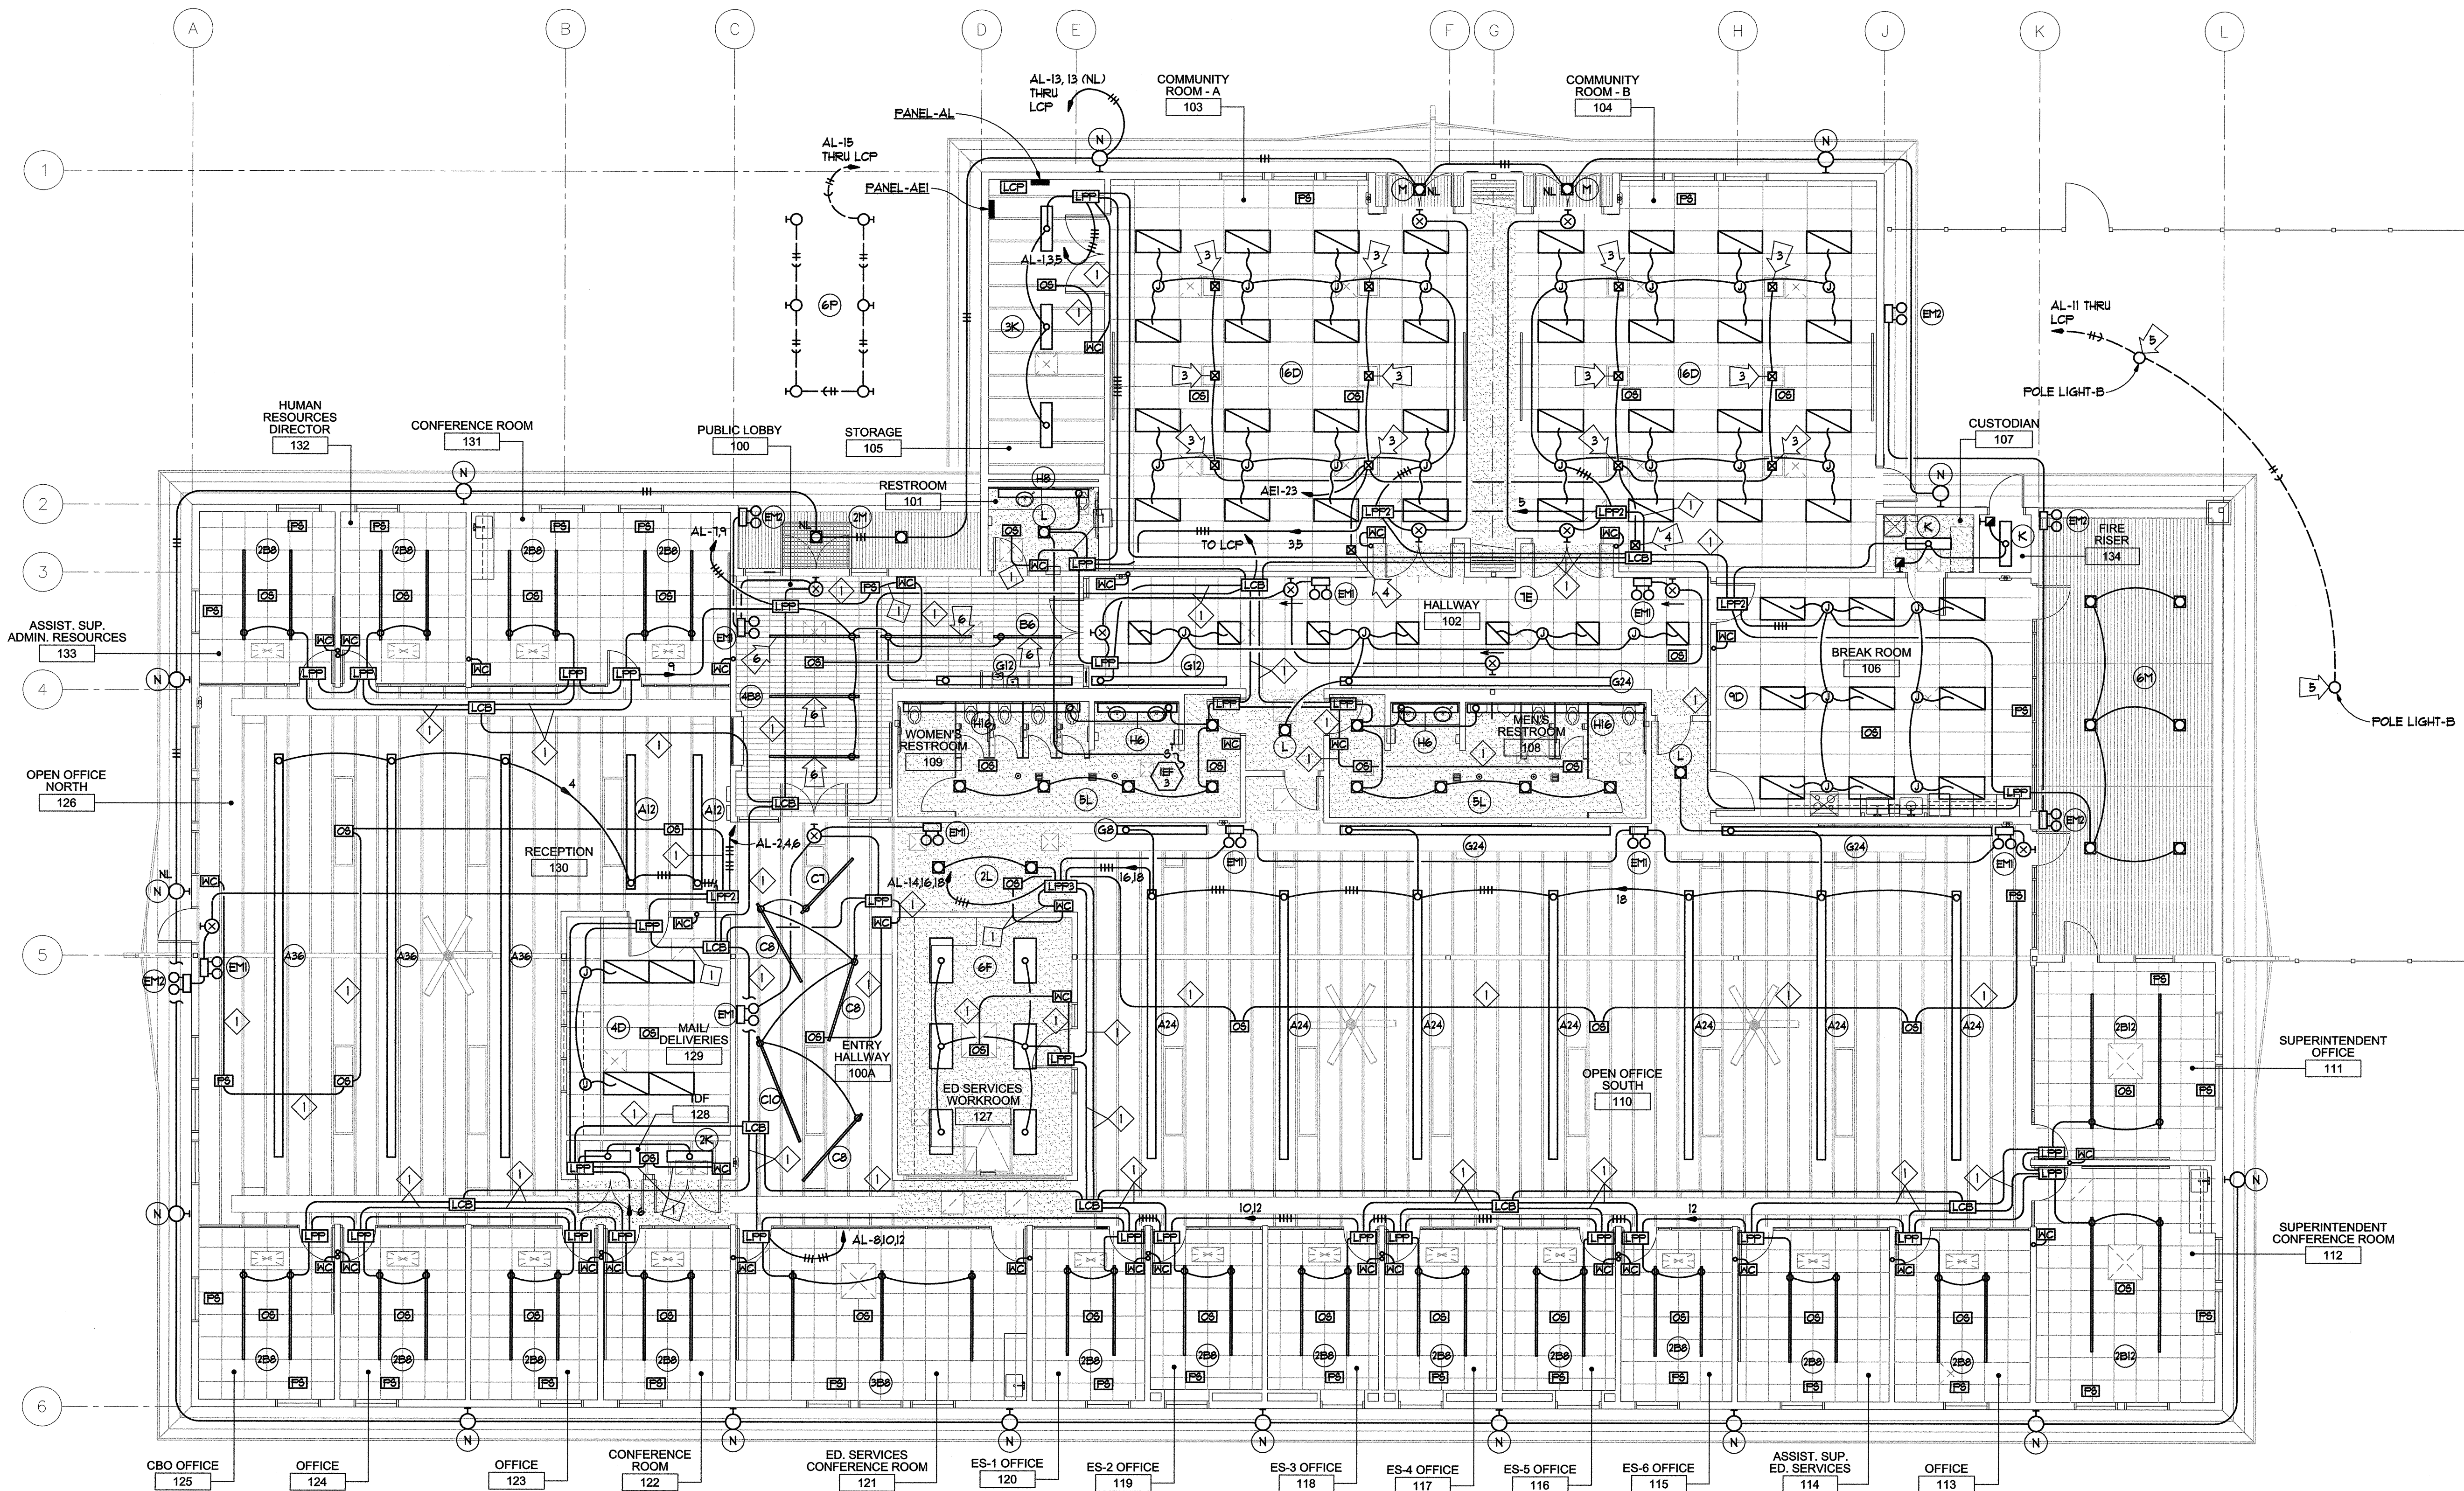

A
E2.1

LIGHTING FLOOR PLAN

SCALE: 1/8" = 1'-0"



Dry Creek Joint Elementary School District
District Education Center

8849 Cook Riolo Road, Roseville, CA 95747


Dry Creek Joint Elementary School District

FILE NO. 31-15

IDENTIFICATION STAMP OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-115456
AC: JLA FLS: JMC SS: JMC
DATE: 2/23/19 CJP

DIVISION OF THE STATE ARCHITECT
revision date: by:


HARRY A. YEE & ASSOCIATES, INC.
ELECTRICAL ENGINEERS
4920 TRESPASS BLVD., SUITE D
SACRAMENTO, CALIFORNIA 95822
TEL: 916.454.3319
FAX: 916.454.4117
HVA Job #1602

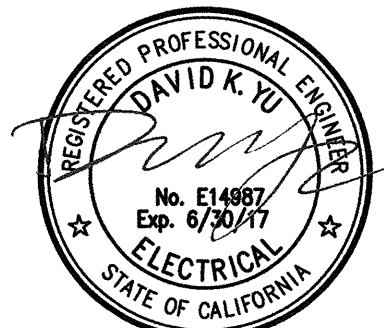

CONSULTANT

nacht&lewis

600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtandlewis.com
916.329.4000

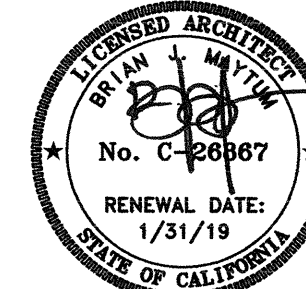

ARCHITECT

INITIAL BOX

NO.	DWG BY	DATE	REVIEWED
-----	--------	------	----------

REVISIONS

NO.	DESCRIPTION	DATE	REV'D
1	100% design development	7/6/16	
2	75% construction documents	9/23/16	
3	DSA submittal	12/31/16	
4	DSA approval	02/23/17	

DATE February 23, 2017

JOB NO. Y1538.00

SHEET TITLE

Lighting
Floor Plan

SHEET NO.

E2.1

SHEET ___ OF ___ TOTAL