

PLUT DATE: 02/22/17  
ONE INCH = TWENTY FEET  
ONE-EIGHTEENTH INCH = ONE FOOT  
ONE-FOURTH INCH = ONE FOOT  
ONE-HALF INCH = ONE FOOT  
THREE-QUARTERS INCH = ONE FOOT  
ONE INCH = ONE FOOT  
ONE AND ONE-HALF INCH = ONE FOOT

| HEAT PUMP SCHEDULE |                |                  |            |            |                   |                    |                |              |
|--------------------|----------------|------------------|------------|------------|-------------------|--------------------|----------------|--------------|
| DESIG.             | UNIT TYPE      | VOLT<br>/ $\phi$ | COOL<br>KW | HEAT<br>KW | COMPRESSOR<br>SCA | MCA                | MAX.<br>FUSE   | IEER         |
| HP1                | HEAT PUMP UNIT | 208/3            | 15.6       | 112        | #1 T.O<br>#2 T.O  | #1 24.0<br>#2 22.0 | #1 35<br>#2 35 | 23/1<br>28.1 |
| HP2                |                | 208/3            | 4.8        | 6.1        | T.O               | #1 24.0<br>#2 22.0 | 50             | 23/1<br>28.1 |

| VRF ENERGY RECOVERY VENTILATOR SCHEDULE |                            |                  |            |     |             |     |     |      |
|-----------------------------------------|----------------------------|------------------|------------|-----|-------------|-----|-----|------|
| DESIG.                                  | UNIT TYPE                  | VOLT<br>/ $\phi$ | SUPPLY AIR |     | EXHAUST AIR |     | MCA | MOCP |
|                                         |                            |                  | HP         | FLA | HP          | FLA |     |      |
| ERV1                                    | ENERGY RECOVERY VENTILATOR | 208/1            | 1.0        | 6.2 | 1.0         | 6.2 | 14  | 15   |

| VRF BRANCH CIRCUIT CONTROLLER SCHEDULE |                           |                  |             |            |             |            |            |      |
|----------------------------------------|---------------------------|------------------|-------------|------------|-------------|------------|------------|------|
| DESIG.                                 | UNIT TYPE                 | VOLT<br>/ $\phi$ | COOLING     |            | HEATING     |            | MCA        | MOCP |
|                                        |                           |                  | POWER KW    | CURRENT KA | POWER KW    | CURRENT KA |            |      |
| BC1                                    | BRANCH CIRCUIT CONTROLLER | 208/1            | 0.183/0.236 | 0.28/1.03  | 0.092/0.118 | 0.45/0.32  | 1.6/0.1.88 | XX   |
| BC2                                    | BRANCH CIRCUIT CONTROLLER | 208/1            | .0178       | 0.26/0.11  | 0.086       | 0.41/0.31  | 1.08/0.91  | XX   |

| FAN SCHEDULE |                    |                  |     |      |       |      |
|--------------|--------------------|------------------|-----|------|-------|------|
| DESIG.       | UNIT TYPE          | VOLT<br>/ $\phi$ | HP  | AMPS | WATTS | FLA  |
| EF1          | INLINE EXHAUST FAN | 115/1            | 3/4 |      |       | 11.3 |
| EF2          | INLINE EXHAUST FAN | 115/1            | 3/4 |      |       | 11.3 |
| EF3          | INLINE EXHAUST FAN | 115/1            | 1/4 |      |       | 3.1  |
| CF1          | CEILING FAN        | 120/1            | 1/4 | 2.0  | 140   |      |
| CF2          | CEILING FAN        | 120/1            | 1/4 | 5.9  | 210   |      |
| CF3          | CEILING FAN        | 120/1            | 1/4 | 5.9  | 210   |      |

| MISCELLANEOUS SCHEDULE |                       |                                  |
|------------------------|-----------------------|----------------------------------|
| DESIG.                 | UNIT TYPE             |                                  |
| EW1                    | ELECTRIC WATER HEATER | 50.0 AMP, 18.0 KW, 208V/3 $\phi$ |
| CP1                    | CIRCULATING PUMP      | 55 WATTS, 115V/1 $\phi$          |
| HD1                    | HAND DRYER            | 2.0 KW, 120V/1 $\phi$            |
| RH1                    | RANGE HOOD            | 120V/1 $\phi$                    |
| DW1                    | DISH WASHER           | 1.5 KW, 120V/1 $\phi$            |
| GD1                    | GARBAGE DISPOSAL      | 1/2 HP, 120V/1 $\phi$            |

| FURNACE SCHEDULE |              |                  |            |      |     |
|------------------|--------------|------------------|------------|------|-----|
| DESIG.           | UNIT TYPE    | VOLT<br>/ $\phi$ | SUPPLY FAN |      | MCA |
|                  |              |                  | HP         | FLA  |     |
| F1               | FURNACE UNIT | 115/1            | 3/4        | 9.9  | .   |
| F2               |              | 115/1            | 1.0        | 12.3 | .   |
| F3               |              | 115/1            | 1.0        | 12.3 | .   |
| F4               |              | 115/1            | 1.0        | 12.3 | .   |
| F5               |              | 115/1            | 1/2        | 6.8  | .   |
| F6               |              | 115/1            | 1.0        | 12.3 | .   |
| F7               |              | 115/1            | 1.0        | 12.3 | .   |
| F8               |              | 115/1            | 1.0        | 11.1 | .   |

| FAN COIL SCHEDULE |               |                  |           |                       |      |             |
|-------------------|---------------|------------------|-----------|-----------------------|------|-------------|
| DESIG.            | UNIT TYPE     | VOLT<br>/ $\phi$ | FAN MOTOR | AMPS                  | MCA  | MOCP (AMPS) |
| FC1               | FAN COIL UNIT | 208/1            | 1         | 0.20                  | 0.25 | 15A         |
| FC2               |               | 208/1            | 1         | 0.20                  | 0.25 | 15A         |
| FC3               |               | 208/1            | 1         | 0.21                  | 0.26 | 15A         |
| FC4               |               | 208/1            | 1         | 0.20                  | 0.25 | 15A         |
| FC5               |               | 208/1            | 1         | 0.20                  | 0.25 | 15A         |
| FC6               |               | 208/1            | 1         | 0.21                  | 0.26 | 15A         |
| FC7               |               | 208/1            | 1         | 0.20                  | 0.25 | 15A         |
| FC8               |               | 208/1            | 1         | 0.20                  | 0.25 | 15A         |
| FC9               |               | 208/1            | 1         | 0.51 HTG<br>0.43 CLG. | 0.64 | 15A         |
| FC10              |               | 208/1            | 1         | 0.20                  | 0.25 | 15A         |
| FC11              |               | 208/1            | 1         | 0.20                  | 0.25 | 15A         |
| FC12              |               | 208/1            | 1         | 0.20                  | 0.25 | 15A         |
| FC13              |               | 208/1            | 1         | 0.20                  | 0.25 | 15A         |
| FC14              |               | 208/1            | 1         | 0.20                  | 0.25 | 15A         |
| FC15              |               | 208/1            | 1         | 0.20                  | 0.25 | 15A         |
| FC16              |               | 208/1            | 1         | 0.20                  | 0.25 | 15A         |
| FC17              |               | 208/1            | 1         | 0.51 HTG<br>0.43 CLG. | 0.64 | 15A         |
| FC18              |               | 208/1            | 1         | 0.28                  | 0.35 | 15A         |
| FC19              |               | 208/1            | 1         | 0.23                  | 0.29 | 15A         |
| FC20              |               | 208/1            | 1         | 0.26                  | 0.33 | 15A         |

| CONDENSER UNIT SCHEDULE |                |                  |                  |            |       |      |      |      |
|-------------------------|----------------|------------------|------------------|------------|-------|------|------|------|
| DESIG.                  | UNIT TYPE      | VOLT<br>/ $\phi$ | COND. FAN<br>FLA | COMPRESSOR |       | MCA  | MOCP | SEER |
|                         |                |                  |                  | RLA        | LRA   |      |      |      |
| CU1                     | CONDENSER UNIT | 208/1            | 1.10             | 13.6       | 79.0  | 18.1 | .    | 14.5 |
| CU2                     |                | 208/1            | 1.40             | 15.6       | 105.1 | 20.9 | .    | 14.5 |
| CU3                     |                | 208/1            | 1.40             | 15.6       | 105.1 | 20.9 | .    | 14.5 |
| CU4                     |                | 208/1            | 1.40             | 15.6       | 105.1 | 20.9 | .    | 14.5 |
| CU5                     |                | 208/1            | 0.50             | 10.9       | 62.9  | 14.1 | .    | 14.5 |
| CU6                     |                | 208/1            | 1.40             | 15.6       | 105.1 | 20.9 | .    | 14.5 |
| CU7                     |                | 208/1            | 1.40             | 16.1       | 109.0 | 22.3 | .    | 14.5 |
| CU8                     |                | 208/1            | 4.52             | 20.8       | 124.1 | 21.5 | .    | 17.0 |

Dry Creek Joint Elementary School District  
District Education Center  
8849 Cook Riolo Road, Roseville, CA 95747  
Dry Creek Joint Elementary School District

FILE NO. 31-15  
IDENTIFICATION STAMP DIV. OF THE  
STATE ARCHITECT OFFICE OF  
REGULATION SERVICES  
APPLICATION NO.  
02-115456  
AC. TH FL. SH EL. SS BP  
DATE 2/23/17 CAR  
DIVISION OF THE STATE ARCHITECT  
revision date: \_\_\_\_\_ by: \_\_\_\_\_

HARRY A. YEE & ASSOCIATES, INC.  
ELECTRICAL ENGINEERS  
4920 FREEMONT BLVD., SUITE D  
SACRAMENTO, CALIFORNIA 95822  
TEL: 916.454.5319  
FAX: 916.454.4117  
HYA Job #1602  
CONSULTANT

nacht&lewis  
600 Q Street, Suite 100  
Sacramento, CA 95811  
www.nachtandlewis.com  
916.329.4000

REGISTERED PROFESSIONAL ENGINEER  
DAVID A. YEE  
No. E14987  
Exp. 6/30/19  
ELECTRICIAN  
STATE OF CALIFORNIA

ARCHITECT  
INITIAL BOX  
NO. DWG BY DATE REVIEWED  
REVISIONS  
NO. DESCRIPTION DATE REV'D  
100% design development 7/9/16  
75% construction documents 9/20/16  
DSA submittal 12/31/16  
DSA approval 02/23/17  
DATE February 23, 2017  
JOB NO. Y1538.00  
SHEET TITLE  
Electrical  
Schedules  
SHEET NO.  
E9.1  
SHEET \_\_\_\_ OF \_\_\_\_ TOTAL



PLUT DATE: 02/22/17

ONE INCH = TWENTY FEET

ONE INCH = TWENTY FEET

ONE-EIGHTH INCH = ONE FOOT

ONE-QUARTER INCH = ONE FOOT


ONE-HALF INCH = ONE FOOT

THREE-QUARTERS INCH = ONE FOOT

ONE INCH = ONE FOOT

ONE AND ONE-HALF INCH = ONE FOOT


System No. W-L-3255  
F Ratings - 1 and 2 Hr (See Item 1)  
T Ratings - 1, 1-1/4 and 1-3/4 Hr (See Item 2)

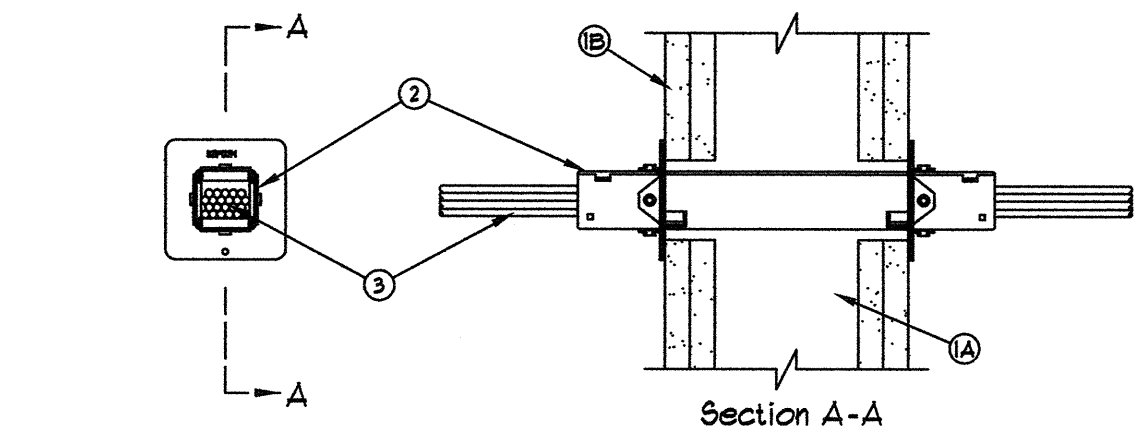

- Wall Assembly - The 1 or 2 hr fire-rated gypsum board/stud wall assembly shall be constructed of the materials and in the manner described within the individual U300 or U400 Series Wall or Partition Details in the UL Fire Resistance Directory and shall incorporate the following construction features:
  - Studs - Wall framing shall consist of either wood studs or steel channel studs. Wood studs to consist of nominal 2 by 4 in. (51 by 102 mm) lumber spaced max 16 in. (406 mm) OC. Steel studs to be min 3-1/2 in. (89 mm) wide and spaced max 24 in. (610 mm) OC.
  - Gypsum Board - Thickness, type, number of layers and fasteners as specified in the individual Wall and Partition Details. Opening in gypsum board to be max 2 in. (51 mm) diameter or 1/4 in. (6 mm) longer than width and height dimensions of firestop device(s).
  - The hourly F Rating of the firestop system is dependent upon the hourly rating of the wall in which it is installed.
- Firestop Device - One firestop device module consisting of a 1/4 by 1/4 by 10-1/2 in. (36 by 36 by 267 mm) long galv steel tube with an intumescent material lining. Firestop device module to be installed in accordance with the accompanying installation instructions. The space between the firestop device module and the periphery of the opening shall be min 0 in. (0 mm, point contact) to max 1/8 in. (32 mm). Firestop device module(s) secured in place by means of steel wall plates installed with gasketing material supplied with product. Steel wall plates installed on both sides of wall and secured to each device by means of steel set screws provided with device. The firestop device module is to be installed with ends projecting an equal distance beyond each surface of the wall assembly.
- Specified Technologies Inc. - E2 (MATH) H1
- Cables - Within the loading area for each firestop device module, the cables may represent a 0 to 100 percent visual fill. Cable fill to be distributed at a uniform height across the width of the firestop device module. Cables to be rigidly supported on both sides of the wall assembly. Any combination of the following types of cables may be used:
  - Max four pair No. 22 AWG (or smaller) copper conductor data cable with polyvinyl chloride (PVC) or plenum rated jacketing and insulation.
  - Max RG4U coaxial cable with fluorinated ethylene insulation and jacketing.
  - Fiber optic cable with polyvinyl chloride (PVC) or polyethylene (PE) jacket and insulation having a max diam of 1/4 in. (6 mm).


When the hourly rating of the wall assembly is 1 hr, the T Rating is 1 hr. When the hourly fire rating of the wall assembly is 2 hr, the T Rating is 1-1/4 hr when cables are installed and 1-3/4 hr when no cables are installed.

\*Bearing the UL Classification Mark.

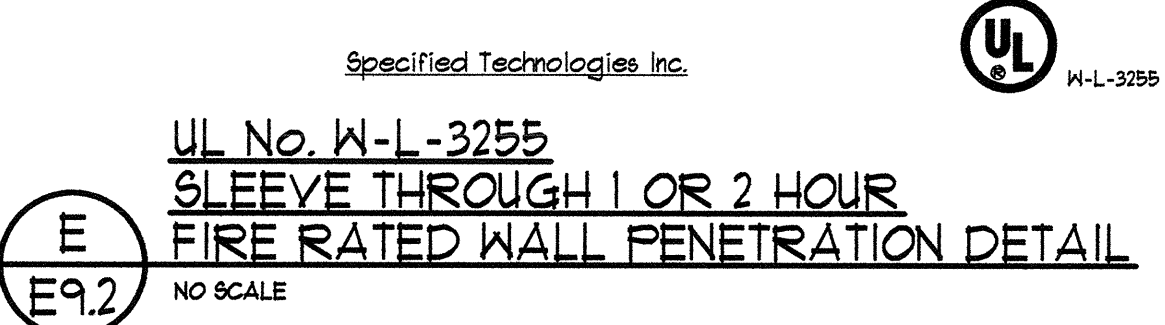

UL No. W-L-3255  
SLEEVE THROUGH 1 OR 2 HOUR  
FIRE RATED WALL PENETRATION DETAIL  
NO SCALE

System No. W-L-1001  
F Ratings - 120 and 4 Hr (See Items 2 and 3)  
T Ratings - 0, 120, and 4 Hr (See Item 3)

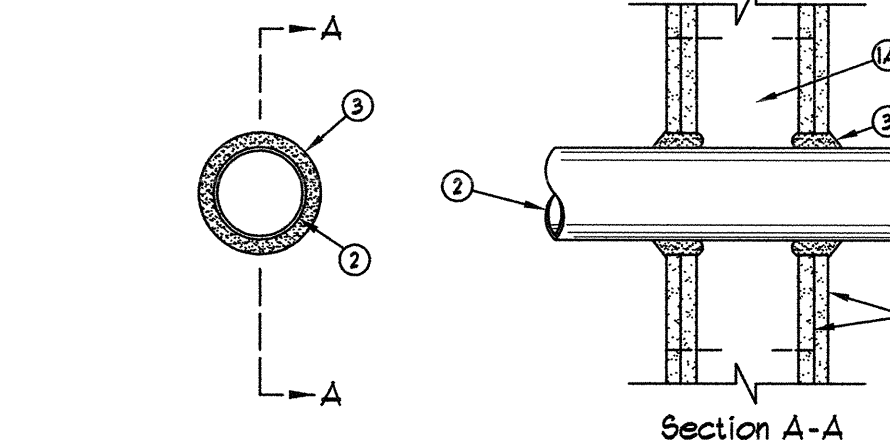


- Wall Assembly - The 120 or 4 hr fire-rated gypsum wall/individual wall assembly shall be constructed of the materials and in the manner described in the individual U300 or U400 Series Wall or Partition Details in the UL Fire Resistance Directory and shall include the following construction features:
  - Studs - Wall framing may consist of either wood studs (max 2 hr fire rated assemblies) or steel channel studs. Wood studs to consist of nominal 2 by 4 in. (51 by 102 mm) lumber spaced 16 in. (406 mm) OC with nominal 2 by 4 in. (51 by 102 mm) lumber and plates and cross braces. Steel studs to be min 3-5/8 in. (92 mm) wide by 1-3/8 in. (35 mm) deep channels spaced max 24 in. (610 mm) OC.
  - Gypsum Board - Nom 1/2 or 5/8 in. (13 or 16 mm) thick, 4 ft. (122 cm) wide with square or tapered edges. The gypsum wallboard type, thickness, number of layers, fastener type and sheet orientation shall be as specified in the individual U300 or U400 Series design in the UL Fire Resistance Directory. Max dim of opening is 36 in. (914 mm).
  - Through-penetrant - One metallic pipe, conduit or tubing installed either concentrically or eccentrically within the firestop system. The annular space between pipe, conduit or tubing and periphery of opening shall be min 0 in. (0 mm) (point contact) to max 1/8 in. (32 mm). Pipe, conduit or tubing to be rigidly supported on both sides of wall assembly. The following types and sizes of metallic pipes, conduits or tubing may be used:
    - Conduit - Nom 6 in. (152 mm) diam (or smaller) steel conduit or nom 4 in. (102 mm) diam (or smaller) steel electrical metallic tubing.
  - Fill, Void or Cavity Material - Caulk or Sealant - Min 5/8, 1-1/4, 1-1/2 and 2-1/2 in. (16, 32, 48 and 64 mm) thickness of caulk for 120 and 4 hr rated assemblies, respectively, applied within annulus, flush with both surfaces of wall, min 1/4 in. (6 mm) diam bead of caulk applied to gypsum board/penetrant interface at point contact location on both sides of wall. The hourly F rating of the firestop system is dependent upon the hourly fire rating of the wall assembly in which it is installed, and the size of the opening. The hourly T rating of the firestop system is dependent upon the type or size of the pipe or conduit and the hourly fire rating of the wall assembly in which it is installed, as tabulated below:


| Max Pipe or conduit Diam in (mm) | F Rating hr | F Rating hr |
|----------------------------------|-------------|-------------|
| 1 (25)                           | 1 or 2      | 0, 1 or 2   |
| 1 (25)                           | 3 or 4      | 3 or 4      |
| 4 (102)                          | 1 or 2      | 0           |
| 6 (152)                          | 3 or 4      | 0           |

3M Company - CP 25WB + or FB-3000 HT.  
\* Bearing the UL Classification Mark.


UL No. W-L-1001  
FIRE RATED WALL  
THROUGH PENETRATION DETAIL  
NO SCALE

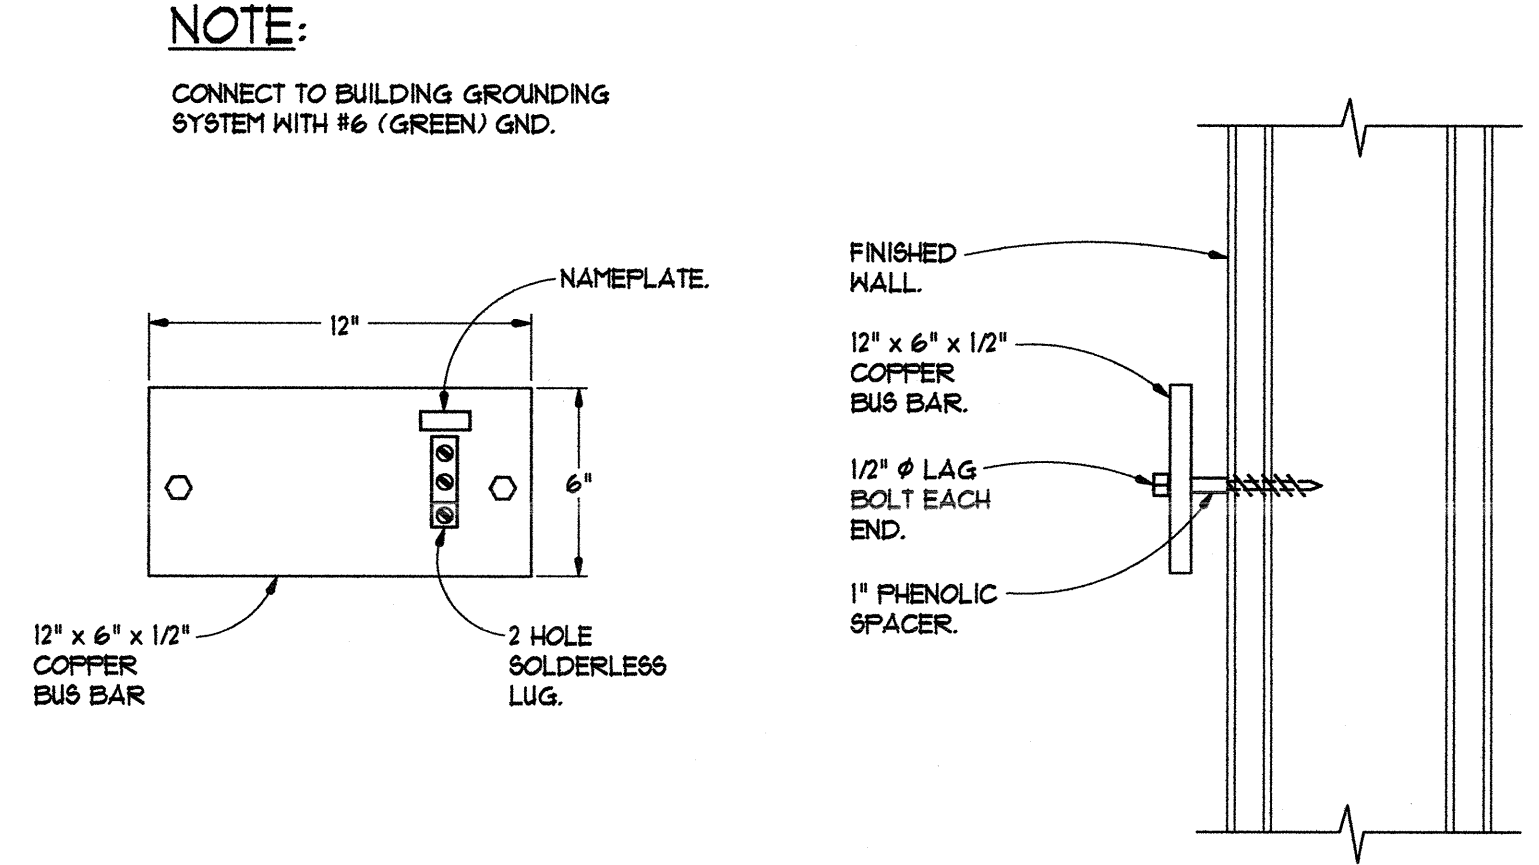

C  
E9.2  
GROUND BUS DETAIL  
NO SCALE

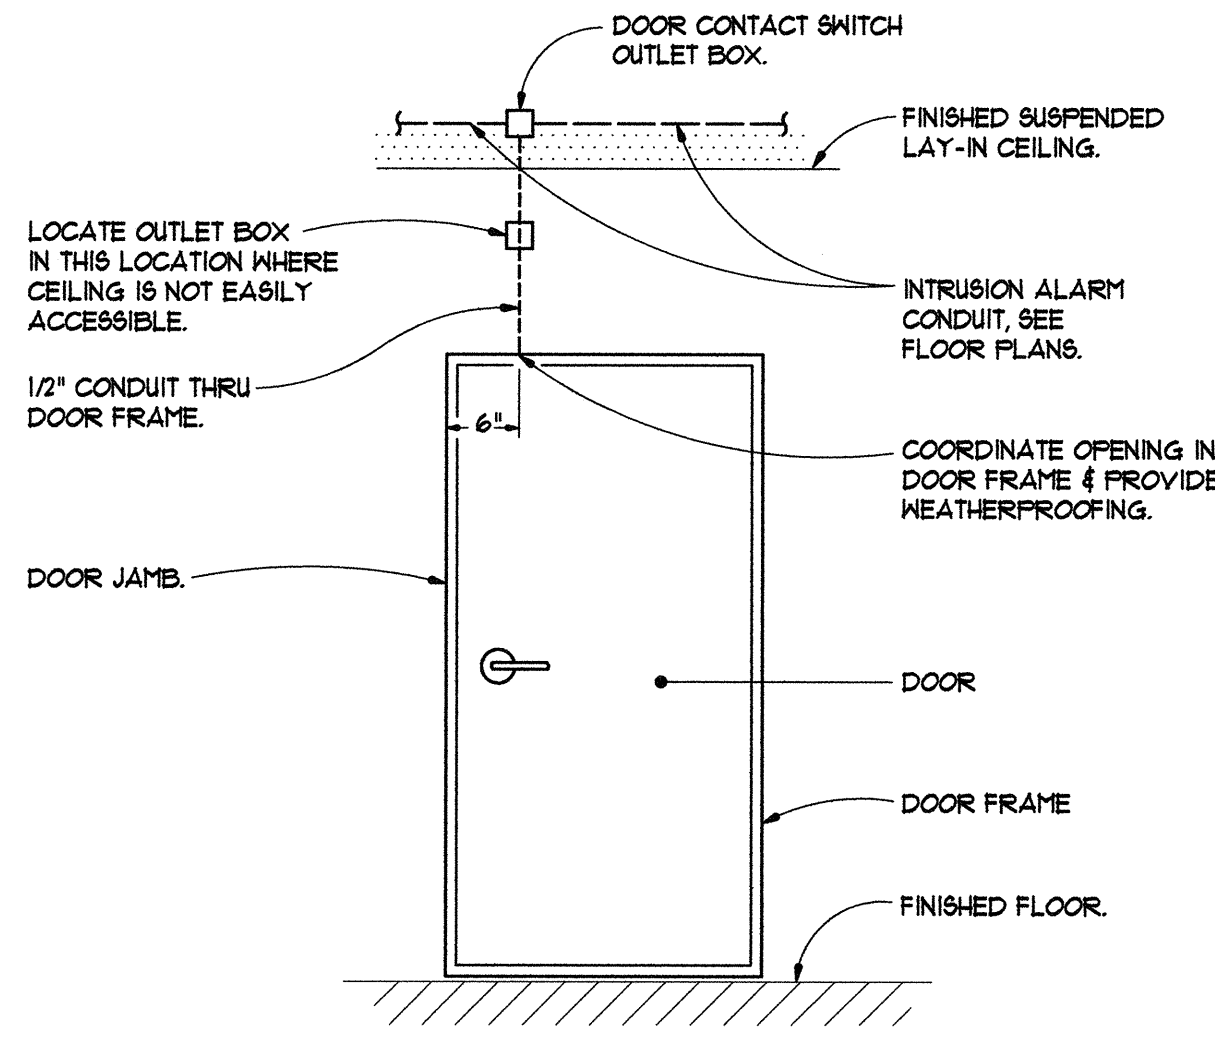

B  
E9.2  
DOOR CONTACT SWITCH  
OUTLET BOX MOUNTING DETAIL  
NO SCALE

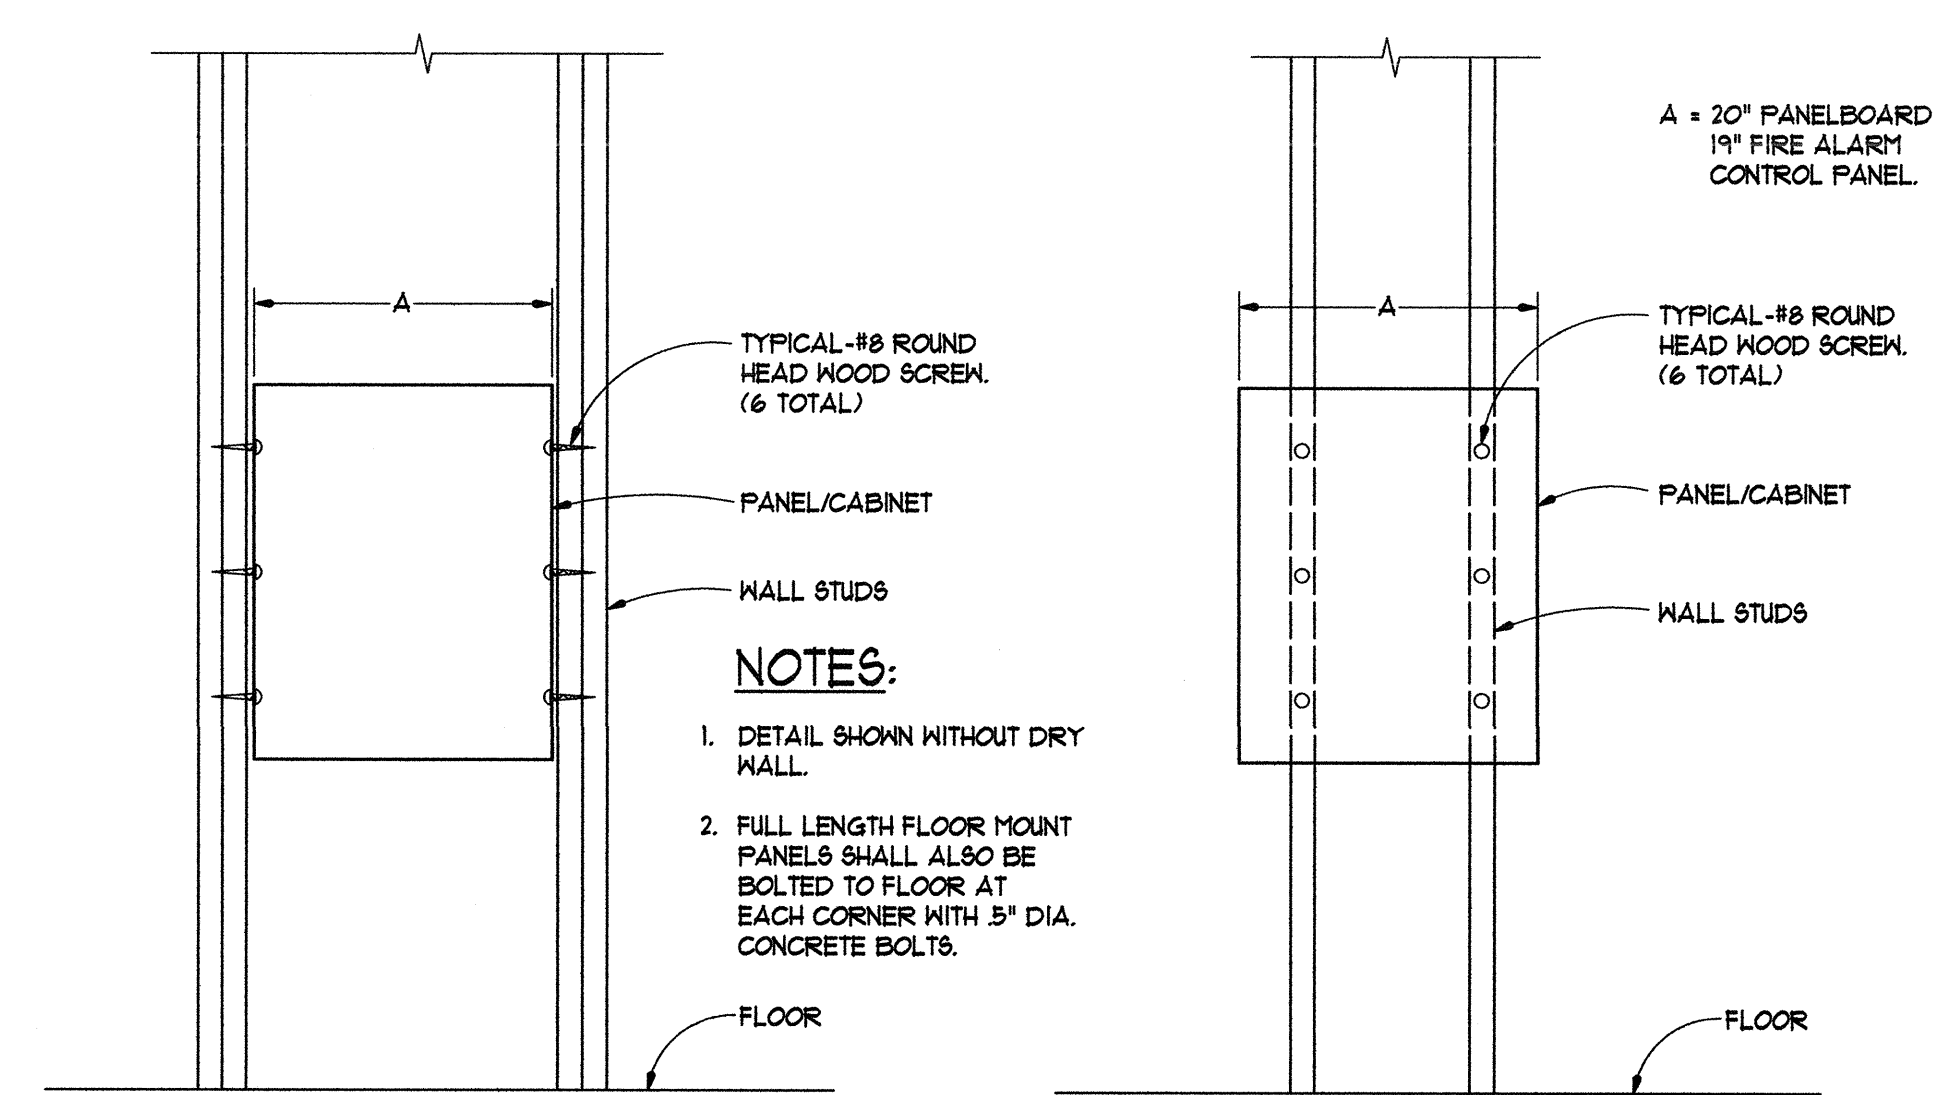

A  
E9.2  
CABINET AND PANEL MOUNTING DETAIL  
NO SCALE

Dry Creek Joint Elementary School District  
District Education Center

8849 Cook Riolo Road, Roseville, CA 95747

Dry Creek Joint Elementary School District

FILE NO. 31-15

IDENTIFICATION STAMP OF THE  
STATE ARCHITECT OFFICE OF  
REGULATION SERVICES

APPLICATION NO.  
02-115456

AC. TM. FLS. HNE. SS. BLS. CCR

DATE 2/23/17 CCR

DIVISION OF THE STATE ARCHITECT

revision date: by:

HARRY A. YEE & ASSOCIATES, INC.  
ELECTRICAL ENGINEERS  
4920 TREMPER BLVD., SUITE D  
SACRAMENTO, CALIFORNIA 95822  
TEL: 916.454.5319  
FAX: 916.454.4117  
HYA Job #1602

REGISTERED PROFESSIONAL ENGINEER  
DAVID A. YEE  
No. E14987  
Exp. 6/30/17  
ELECTRICAL  
STATE OF CALIFORNIA

CONSULTANT

nacht&lewis

800 Q Street, Suite 100  
Sacramento, CA 95811  
www.nachtandlewis.com  
916.329.4000

REGISTERED ARCHITECT  
BRIAN J. LAMBERT  
No. C-36891  
RENEWAL DATE:  
1/31/19  
STATE OF CALIFORNIA

ARCHITECT

INITIAL BOX

| NO. | DWG | BY | DATE | REVIEWED |
|-----|-----|----|------|----------|
|     |     |    |      |          |
|     |     |    |      |          |
|     |     |    |      |          |
|     |     |    |      |          |

REVISIONS

| NO. | DESCRIPTION | DATE | REV |
|-----|-------------|------|-----|
|     |             |      |     |
|     |             |      |     |
|     |             |      |     |
|     |             |      |     |

DATE February 23, 2017

JOB NO. Y1538.00

SHEET TITLE

Electrical  
Details

SHEET NO.

E9.2

SHEET \_\_\_\_ OF \_\_\_\_ TOTAL



ONE AND ONE-HALF INCH = ONE FOOT  
ONE INCH = ONE FOOT  
THREE-QUARTERS INCH = ONE FOOT  
ONE-HALF INCH = ONE FOOT  
ONE-QUARTER INCH = ONE FOOT  
ONE-EIGHTH INCH = ONE FOOT  
ONE-SIXTEENTH INCH = ONE FOOT  
ONE INCH = TWENTY FEET

| SYMBOLS AND ABBREVIATIONS LEGEND |                          |  |                       |
|----------------------------------|--------------------------|--|-----------------------|
| SYMBOLS                          |                          |  |                       |
|                                  | PENDENT ON LINE          |  | SCREWED UNION         |
|                                  | PENDENT RECESSED ON DROP |  | GROOVED COUPLING      |
|                                  | UPRIGHT ON LINE          |  | FLANGED CONNECTION    |
|                                  | UPRIGHT ON SPRIG         |  | ANGLE VALVE           |
|                                  | UPRIGHT AND PENDENT DROP |  | GLOBE VALVE           |
|                                  | UPRIGHT SPRINKLER        |  | BUTTERFLY VALVE       |
|                                  | DRY PENDENT              |  | O.S.&Y. VALVE         |
|                                  | CONCEALED SPRINKLER      |  | WATER CHECK VALVE     |
|                                  | HORIZONTAL SIDEWALL      |  | SWING CHECK VALVE     |
|                                  | PENDENT SIDEWALL         |  | ALARM VALVE           |
|                                  | UPRIGHT SIDEWALL         |  | DRY / PREACTION VALVE |
|                                  | PIPE ELEV. CHANGE        |  | FIRE SPRINKLER RISER  |
|                                  | CAP                      |  | FLOW SWITCH           |
|                                  | SCREWED PLUG             |  | ELECTRIC BELL         |
|                                  | STANDARD FDC             |  | FLUSH FDC             |
|                                  | FREE STANDING FDC        |  | FHC / FHR             |
|                                  | KEY GATE                 |  | POST INDICATOR        |
|                                  | FIRE HYDRANT             |  | MJ CONNECTION         |
|                                  | THRUST BLOCK             |  | 2-WAY E.Q.B.          |
|                                  | 4-WAY E.Q.B.             |  | CALCULATION NODE      |
| PIPE HANGERS                     |                          |  |                       |
|                                  | BRANCH LINE RESTRAINT    |  |                       |

| ABBREVIATIONS             |                        |                           |                        |
|---------------------------|------------------------|---------------------------|------------------------|
| AFF - ABOVE FIN. FLR.     | EQB - EARTHQUAKE BRACE | JST - JOIST               | SCR - SCREW            |
| AV - ANGLE VALVE          | FDC - FIRE DEPT. COIN. | LVL - LEVEL               | TC - THRD. CPLG.       |
| AO - ARM OVER             | FHC - FIRE HOSE CAB.   | MI - MALLEABLE IRON       | TF - THRD. FLG.        |
| AS - AUTO. SPRINKLER      | FHR - FIRE HOSE RACK   | MJ - MECH. JOINT          | TBE - THRD. BOTH ENDS  |
| ASR - AUTO. SPRK. RISER   | FLG - FLANGE           | (N) - NEW                 | THRD - THREAD          |
| BOB - BOT. OF BEAM        | FOB - FACE OF BLOCK    | N&O - NIPPLE & CAP        | TOE - THRD. ONE END    |
| BOD - BOT. OF DECK        | FOC - FACE OF CONC.    | NF - NO FITTING           | TOL - THRD. OUTLET     |
| BOJ - BOT. OF JOIST       | FOS - FACE OF STUD     | NIC - NOT IN CONTRACT     | TRG - THRD. TED. CPLG. |
| CH VA - CHECK VALVE       | FOW - FACE OF WALL     | NTS - NOT TO SCALE        | T&G - THRD. & GRV      |
| CI - CAST IRON            | GC - GRV. CPLG.        | PE - PLAIN END            | UNO - UNLESS NOTED     |
| COE - CHANGE OF ELEVATION | GLB - GLULAM BEAM      | PI - POST INDICATOR       | UNO - OTHERWISE        |
| COJ - CUT ON JOB          | GRC - GRV. RED. CPLG.  | PW - POST INDICATOR VALVE | WF - WLD. FLG.         |
| COUP - COUPLING           | GRV - GROOVE           | PLG - PLUG                | WLD - WELD             |
| CTF - CUT TO FIT          | GBE - GRV. BOTH ENDS   | SLP - SLOPE               | WMG - WATER MOTOR GONG |
| DI - DUCTILE IRON         | GDE - GRV. ONE END     | SP - STANDPIPE            |                        |
| DN - DOWN                 | GOL - GRV. OUTLET      | STB - STEEL BEAM          |                        |
| DR - DROP                 | GV - GLOBE VALVE       | RED - REDUCING            |                        |
| (E) - EXISTING            | HGR - HANGER           | RN - RISER NIPPLE         |                        |

| K-12 AFSS HAZARD CLASSIFICATION                                                |              |
|--------------------------------------------------------------------------------|--------------|
| CLASSROOMS; OFFICES; AUDITORIUMS/MULTI-PURPOSE ROOMS;<br>LIBRARY READING AREAS | LIGHT HAZARD |

NFPA 13-2013 A.5.1, A.5.2

| CODE ANALYSIS      |                                  |
|--------------------|----------------------------------|
| OFFICE BUILDING    | BUSINESS OFFICE / GROUP TRAINING |
| USE:               | B - OFFICE, A-3 - ASSEMBLY       |
| OCCUPANCY:         | VB NON-RATED, FULLY SPRINKLERED  |
| CONSTRUCTION TYPE: | 16,245 S.F.                      |
| BUILDING AREA:     |                                  |

| APPLICABLE CODES                                                                                    |  |
|-----------------------------------------------------------------------------------------------------|--|
| 2013 CALIFORNIA ADMINISTRATION CODE , TITLE 24,CCR                                                  |  |
| 2013 CALIFORNIA BUILDING CODE (PART 2, VOLUME 1 AND 2, TITLE 24) (2012 INTERNATIONAL BUILDING CODE) |  |
| 2013 CALIFORNIA ELECTRICAL CODE (PART 3, TITLE 24, CCR) (2012 NATIONAL ELECTRICAL CODE)             |  |
| 2013 CALIFORNIA MECHANICAL CODE (PART 4, TITLE 24, CCR) (2012 UNIFORM MECHANICAL CODE)              |  |
| 2013 CALIFORNIA PLUMBING CODE (PART 5, TITLE 24, CCR) (2012 UNIFORM PLUMBING CODE)                  |  |
| 2013 CALIFORNIA ELEVATOR SAFETY CONSTRUCTION CODE (PART 7, TITLE 8, CCR)                            |  |
| 2013 CALIFORNIA FIRE CODE (PART 9, TITLE 24, CCR) (2012 INTERNATIONAL FIRE CODE)                    |  |
| 2013 NFPA 13 - STANDARD FOR THE INSTALLATION OF SPRINKLER SYSTEMS                                   |  |
| 2013 CALIFORNIA GREEN BUILDING STANDARDS CODE                                                       |  |
| 2013 CALIFORNIA REFERENCED STANDARDS CODE (PART 12, TITLE 24, CCR)                                  |  |
| 2013 NFPA 24 - PRIVATE FIRE MAINS                                                                   |  |
| 2013 NFPA 14 - STANDPIPE SYSTEMS                                                                    |  |

| FIRE PROTECTION PROJECT SCOPE                                                                                                                              |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| CONSTRUCT ON EXISTING CAMPUS NEW DISTRICT EDUCATION CENTER. THE NEW BUILDING IS TO BE PROTECTED WITH AN APPROVED AUTOMATIC WET PIPE FIRE SPRINKLER SYSTEM. |  |

| WATER SUPPLY TEST DATA |          |
|------------------------|----------|
| FLOW TEST LOCATION:    | FH #4303 |
| TEST DATE:             | 11/3/16  |
| STATIC PRESSURE:       | 70 PSI   |
| RESIDUAL PRESSURE:     | 65 PSI   |
| FLOW @ 65 PSI:         | 1049 GPM |

| GENERAL INFORMATION PLACARD                                                                        |                                     |
|----------------------------------------------------------------------------------------------------|-------------------------------------|
| SPRINKLER SYSTEM - GENERAL INFORMATION<br>FOR<br>DCJESD DISTRICT EDUCATION CENTER                  |                                     |
| HIGH-PILED STORAGE: <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO            | DATE: 2/23/2016                     |
| RACK STORAGE: <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO                  | FLOW TEST DATA:                     |
| COMMODITY CLASS: N/A                                                                               | STATIC: 70 PSI                      |
| MAX. STORAGE HT.: N/A FT                                                                           | RESIDUAL: 65 PSI                    |
| aisle width (min.): N/A FT                                                                         | FLOW: 1049 GPM                      |
| ENCAPSULATION: <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO                 | PITOT: 46 PSI                       |
| SOLID SHELVING: <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO                | DATE: 11/3/16                       |
| FLAMMABLE/COMBUSTIBLE LIQUIDS: <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO | LOCATION: FH #4303<br>COOK RIOLO RD |
| OTHER STORAGE: <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO                 | LOCATION OF AUX/LOW POINT DRAINS:   |
| HAZARDOUS MATERIALS: <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO           | @ FIRE SPRINKLER RISER              |
| IDLE PALLETS: <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO                  | @ ROOMS 113, 125, 133               |
| ANTIFREEZE SYSTEMS: <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO            |                                     |
| LOCATION:                                                                                          | ORIGINAL MAIN DRAIN TEST RESULTS:   |
| DRY OR AUX. SYSTEMS: <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO           | STATIC: T.B.D. PSI                  |
| LOCATION:                                                                                          | RESIDUAL: T.B.D. PSI                |
| NAME OF CONTRACTOR OR DESIGNER:                                                                    |                                     |
| CAPITAL ENGINEERING CONSULTANTS, INC.                                                              |                                     |
| ADDRESS: 11020 SUN CENTER DRIVE, SUITE 100, RANCHO CORDOVA, CA                                     |                                     |
| PHONE: 916-851-3500                                                                                |                                     |

| FIRE PROTECTION PROJECT NOTES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| 1. THE AUTOMATIC WET PIPE SPRINKLER SYSTEMS SHALL CONFORM TO THE REQUIREMENTS OF THE 2013 EDITION OF NFPA PAMPHLET #13, AND 2013 CBC.                                                                                                                                                                                                                                                                                                                                                                                  |  |
| 2. A MINIMUM OF 48 HOURS NOTICE SHALL BE REQUIRED FOR ANY INSPECTAND/OR TESTING.                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |
| 3. INSTALLATION OF THE SPRINKLER SYSTEM SHALL NOT BE STARTED UNTIL COMPLETE PLANS AND SPECIFICATIONS (INCLUDING WATER SUPPLY INFORMATION AND TYPE OF EXISTING SPRINKLER SYSTEM, IF ANY) HAVE BEEN APPROVED BY THE DEPARTMENT THE STATE ARCHITECT (D.S.A.). A STAMPED SET OF APPROVED DRAWINGS SHALL BE ON THE JOB SITE AND USED FOR INSTALLATION. ANY DEVIATION FROM THE APPROVED PLANS, INCLUDING THE SUBSTITUTION OF ANY COMPONENTS SHALL BE APPROVED BY THE DSA. FAILURE TO COMPLY MAY RESULT IN A STOP WORK ORDER. |  |
| 4. ANY DISCREPANCIES BETWEEN THE DRAWINGS AND THE CODE OR RECOGNIZED SPRINKLER STANDARDS SHALL BE BROUGHT TO TO THE ATTENTION OF THE INSPECTOR OF RECORD.                                                                                                                                                                                                                                                                                                                                                              |  |
| 5. SEE ATTACHED "SEISMIC BRACING" DETAILS AND CALCULATIONS FOR INSTALLATION INFORMATION FOR EACH BRACE TYPE.                                                                                                                                                                                                                                                                                                                                                                                                           |  |
| 6. UNDERGROUND SITE FIRE PROTECTION PIPING IS SHOWN FOR HYDRAULIC CALCULATION REFERENCE ONLY.                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
| 7. THE FIRE SPRINKLER SYSTEMS HAS BEEN HYDRAULICALLY CALCULATED FOR LIGHT HAZARD OCCUPANCY AT A DESIGN DENSITY OF .10 GPM SF OVER 1950 SF.                                                                                                                                                                                                                                                                                                                                                                             |  |
| 8. THREADED PIPING TO BE SCH-40, BLACK STEEL WITH CAST OR DUCTILE IRON FITTINGS. GROOVED END PIPING TO BE SCH-10, BLACK STEEL WITH GROOVED FITTINGS AND WELDED OUTLETS.                                                                                                                                                                                                                                                                                                                                                |  |
| 9. METHODS AND PROCEDURES FOR SHOP WELDING OF OUTLETS SHALL COMPLY WITH AWS B2.1.                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
| 10. THE INSTALLING FIRE SPRINKLER CONTRACTOR SHALL VERIFY / COORDINATE, AT NO ADDITIONAL COST TO THE OWNER, THE LOCATION OF SPRINKLERS, PIPING, AND DEVICES PRIOR TO FABRICATION AND INSTALLATION OF THE FIRE SPRINKLER SYSTEM.                                                                                                                                                                                                                                                                                        |  |
| 11. THE INSTALLING FIRE SPRINKLER CONTRACTOR SHALL SUBMIT TO THE ARCHITECT FOR DSA REVIEW AND APPROVAL. SHOP DRAWINGS AND SUPPORTIVE CALCULATIONS FOR ANY/ALL CHANGES TO THE FIRE SPRINKLER SYSTEM LAYOUT SHOWN ON THESE DRAWINGS, AT NO ADDITIONAL COST TO THE OWNER. THE INSTALLATION SHALL BE BASED ON THIS APPROVED SET.                                                                                                                                                                                           |  |

| FIRE PROTECTION GENERAL NOTES                                                                                                                                                                                                                                                                                                                          |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| 1. NFPA 13 (2013) SEC. 10.10.2.1 UNDERGROUND MAINS AND LEAD-IN CONNECTIONS TO SYSTEM RISER SHALL BE COMPLETELY FLUSHED BEFORE CONNECTION IS MADE TO OVERHEAD SPRINKLER PIPING SYSTEMS (WITNESSED BY THE INSPECTOR OF RECORD).                                                                                                                          |  |
| 2. NFPA 13 (2013) SEC. 10.10.2.2 ALL INTERIOR PIPING AND APPURTENANCES SUBJECTED TO SYSTEM WORKING PRESSURE SHALL BE HYDROSTATICALLY TESTED AT 200 PSI AND SHALL MAINTAIN THAT PRESSURE WITHOUT LOSS FOR 2 HOURS (WITNESSED BY THE INSPECTOR OF RECORD). LOCAL FIRE DEPARTMENT SHALL BE NOTIFIED OF DATE AND TESTING SO THAT THEY MAY OBSERVE TESTING. |  |
| 3. NFPA 13 (2013) SEC. 6.2.9.5 PROVIDE SPARE SPRINKLER HEAD CABINET, SPRINKLER WRENCH, AND NO FEWER THAN 6 SPARE SPRINKLER HEADS MATCHING THE TYPES AND TEMPERATURE RATING IN EACH PROTECTED BUILDING FOR SYSTEMS LESS THAN 300 SPRINKLERS (12 SPARE SPRINKLER HEADS FOR SYSTEMS 300 TO 1000 SPRINKLERS).                                              |  |
| 4. NFPA 13 (2013) SEC. 9.3.6.3 THE END SPRINKLER ON A LINE SHALL BE RESTRAINED AGAINST EXCESSIVE VERTICAL AND LATERAL MOVEMENT.                                                                                                                                                                                                                        |  |
| 5. NFPA 13 (2013) SEC. 9.3.6 PROVIDE RESTRAINT OF BRANCH LINES BY USE OF ONE OF THE FOLLOWING:<br>A. A LISTED SWAY BRACE ASSEMBLY.<br>B. A WRAPAROUND U-HOOK SATISFYING THE REQUIREMENTS OF 9.3.5.3.11.<br>C. NUMBER 12, 440-LB. WIRE INSTALLED AT LEAST 45 DEGREES FROM THE VERTICAL PLANE AND ANCHORED ON BOTH SIDES OF THE PIPE.                    |  |
| 6. NFPA 13 (2013) SEC. 25.2.3.1 SPRINKLER FLOW SWITCH SHALL BE TESTED BY IOR TO CONFIRM THAT WHEN THE INSPECTOR'S TEST VALVE IS ACTIVATED AN ALARM WILL SOUND NO LESS THAN 20 SECONDS AND NOT MORE THAN 90 SECONDS.                                                                                                                                    |  |
| 7. CBC SEC. 903.4.1 MAIN FIRE ALARM PANEL VALVE MONITORING AND WATER-FLOW ALARM AND TROUBLE SIGNALS SHALL BE DISTINCTLY DIFFERENT AND SHALL BE AUTOMATICALLY TRANSMITTED TO AN APPROVED CENTRAL STATION MONITORING COMPANY.                                                                                                                            |  |
| 8. NFPA 13 (2013) SEC. 6.9.3.1 FLOW SWITCH SHALL BE CONNECTED TO A 10 INCH OUTSIDE ALARM BELL AT EACH RISER. APPROVED IDENTIFICATION SIGNS SHALL BE PROVIDED FOR OUTSIDE ALARM BELL "SPRINKLER FIRE ALARM - WHEN BELL RINGS CALL 911 / FIRE DEPARTMENT".                                                                                               |  |
| 9. NFPA 13 (2013) FIGURE A.25.5 A HYDRAULIC CALCULATIONS DESIGN PLACARD SHALL BE ATTACHED TO RISER.                                                                                                                                                                                                                                                    |  |
| 10. NFPA 13 (2013) SEC. 25.1 SPRINKLER CONTRACTOR (C16) SHALL COMPLETE AND SIGN CONTRACTOR'S MATERIAL TEST CERTIFICATE FOR THE OVERHEAD SPRINKLER SYSTEM USING FORM IN FIGURE 25.1. THIS FORM SHALL BE GIVEN TO THE INSPECTOR OF RECORD (IOR) WHO WILL TURN-IN FOR DSA RECORDS.                                                                        |  |
| 11. NFPA 13 (2013) SEC. 25.2.3.4.1 THE MAIN DRAIN VALVE SHALL BE OPEN AND REMAIN OPEN UNTIL THE SYSTEM PRESSURE STABILIZES. THE STATIC AND RESIDUAL PRESSURES SHALL BE RECORDED IN THE CONTRACTOR'S TEST CERTIFICATE (WITNESSED BY INSPECTOR OF RECORD-IOR).                                                                                           |  |
| 12. TITLE 19 ARTICLE 906 (a-d) A LABEL OF THE SELF-ADHESIVE TYPE SHALL BE PLACED ON THE FIRE DEPARTMENT CONNECTION OR ON THE RISER FOR THE FIRE SPRINKLER SYSTEM WITH THE DATE OF SERVICE AND/OR DATE OF INSTALLATION WAS PERFORMED AND LICENSE NUMBER OF PERSON PERFORMING SERVICE WORK.                                                              |  |
| 13. ALL PENETRATIONS IN RATED WALL OR CEILING/FLOOR ASSEMBLIES WILL BE SEALED WITH AN APPROVED MATERIAL.                                                                                                                                                                                                                                               |  |
| 14. NFPA 13 (2013) SEC. 25.4 THE INSTALLING CONTRACTOR SHALL PROVIDE THE OWNER WITH A CALIFORNIA NFPA 25, CALIFORNIA EDITION - 2013.                                                                                                                                                                                                                   |  |
| 15. ANY SUBSTITUTION OF "FLEXIBLE" TYPE PIPING IN LIEU OF "RIGID" PIPE OR ANY CHANGES TO SIZE, MANUFACTURER OR LENGTHS OF "FLEXIBLE" TYPE PIPING WILL REQUIRE RESUBMITTAL OF PIPING PLANS, PRODUCT DATA SHEETS AND HYDRAULIC CALCULATIONS TO DSA FOR REVIEW AND APPROVAL.                                                                              |  |

| COORDINATION AND SHOP DRAWING NOTES                                                                                                                                                                                                                                  |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| 1. CLEARANCES IN ALL ATTIC AREAS ARE EXTREMELY LIMITED. MULTIPLE SYSTEMS ARE LOCATED IN THE ATTIC SPACES. WORK CLOSELY TOGETHER WITH ALL TRADES TO ENSURE THAT PROPER ROUTING OF THE ALL FIRE PROTECTION SYSTEMS IS ACHIEVED, AND TO ENSURE THAT NO CONFLICTS OCCUR. |  |
| 2. CONDITIONS HAVE BEEN SHOWN AS ACCURATELY AS POSSIBLE. ALL CONDITIONS ARE TO BE FIELD VERIFIED. CONTRACTOR IS TO INCLUDE IN HIS BID ADJUSTMENTS TO THE WORK AS REQUIRED TO ACCOMMODATE THE ACTUAL FIELD CONDITIONS.                                                |  |
| 3. COORDINATED SHOP DRAWINGS ARE REQUIRED. CONTRACTORS ARE TO PROVIDE COORDINATED SHOP DRAWINGS THAT INCLUDE ALL SYSTEMS TO BE INSTALLED. SYSTEMS FROM ALL TRADES ARE TO BE COORDINATED SO THAT NO CONFLICTS OCCUR.                                                  |  |

Dry Creek Joint Elementary School District  
District Education Center  
8849 Cook Riolo Road, Roseville, CA 95747  
Dry Creek Joint Elementary School District

|                                                                                                                           |                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| FILE NO. 31-15                                                                                                            | IDENTIFICATION STAMP DIV. OF THE<br>STATE ARCHITECT OFFICE OF<br>REGULATION SERVICES |
| APPLICATION NO.<br>02-115496                                                                                              |                                                                                      |
| AC. - FLS. - SS. - R.R.                                                                                                   |                                                                                      |
| DATE 2/23/17                                                                                                              |                                                                                      |
| DIVISION OF THE STATE ARCHITECT                                                                                           |                                                                                      |
| revision date:                                                                                                            | by:                                                                                  |
| REGISTERED PROFESSIONAL ENGINEER<br>NICHOLAS A. DAVIS<br>No. 2284<br>Expires 8/30/19<br>MECHANICAL<br>STATE OF CALIFORNIA |                                                                                      |
| DATE SIGNED: 2/19/2017                                                                                                    |                                                                                      |
| CAPITAL ENGINEERING<br>CONSULTANTS, INC.<br>RANCHO CORDOVA, CALIFORNIA                                                    | RL<br>PM - DESIGN TEAM                                                               |
| 160110.00<br>PROJECT NO.                                                                                                  |                                                                                      |
| CONSULTANT                                                                                                                |                                                                                      |


nacht&lewis  
600 Q Street, Suite 100  
Sacramento, CA 95811  
www.nachtandlewis.com  
916.329.4000

|                                                                                                           |
|-----------------------------------------------------------------------------------------------------------|
| REGISTERED ARCHITECT<br>BRIAN J. MAYHEW<br>No. C-26887<br>RENEWAL DATE:<br>1/31/19<br>STATE OF CALIFORNIA |
|-----------------------------------------------------------------------------------------------------------|

|                        |                            |          |          |
|------------------------|----------------------------|----------|----------|
| ARCHITECT              |                            |          |          |
| INITIAL BOX            |                            |          |          |
| NO.                    | DWG BY                     | DATE     | REVIEWED |
|                        |                            |          |          |
|                        |                            |          |          |
|                        |                            |          |          |
| REVISIONS              |                            |          |          |
| NO.                    | DESCRIPTION                | DATE     | REV      |
|                        | 100% design development    | 7/8/16   |          |
|                        | 75% construction documents | 9/20/16  |          |
|                        | DSA submittal              | 12/21/16 |          |
|                        | DSA approval               | 02/23/17 |          |
|                        |                            |          |          |
|                        |                            |          |          |
|                        |                            |          |          |
| DATE February 23, 2017 |                            |          |          |
| JOB NO. Y1538.00       |                            |          |          |
| SHEET TITLE            |                            |          |          |

Fire Protection  
Notes, Legends  
SHEET NO.  
FP0.1  
SHEET \_\_\_\_ OF \_\_\_\_ TOTAL




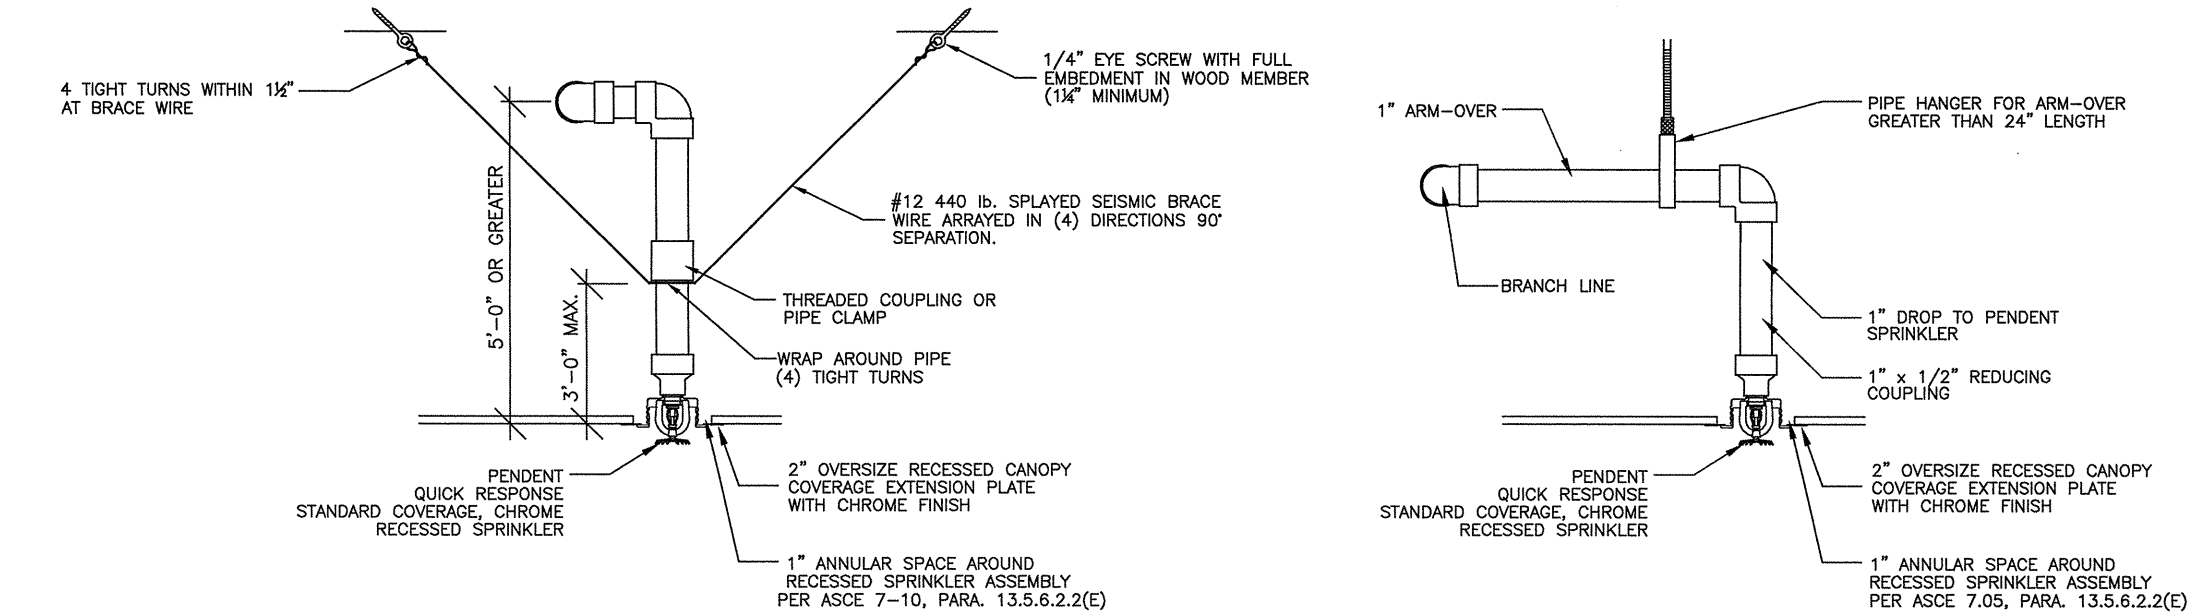

## FIRE PROTECTION ARM-OVER & DROP DETAILS

SCALE : NONE


5  
FP0.2

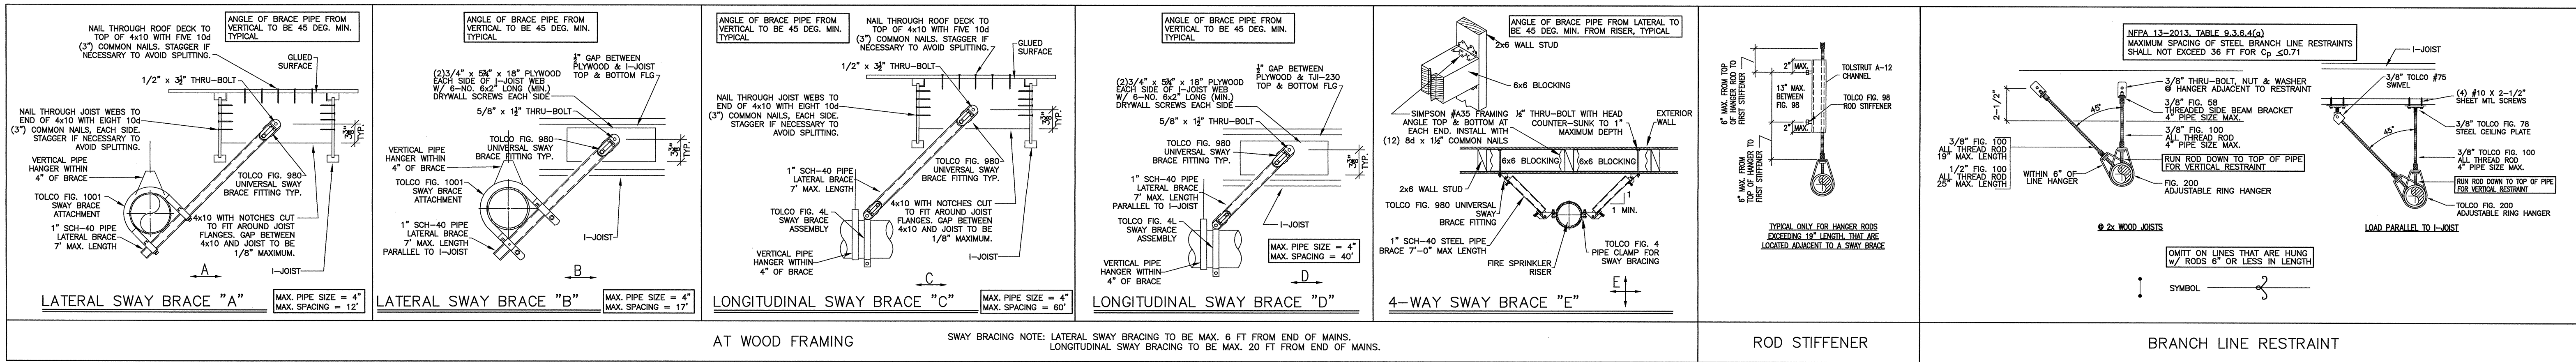

## FIRE PROTECTION BRACING DETAILS

SCALE : NONE


4  
FP0.2

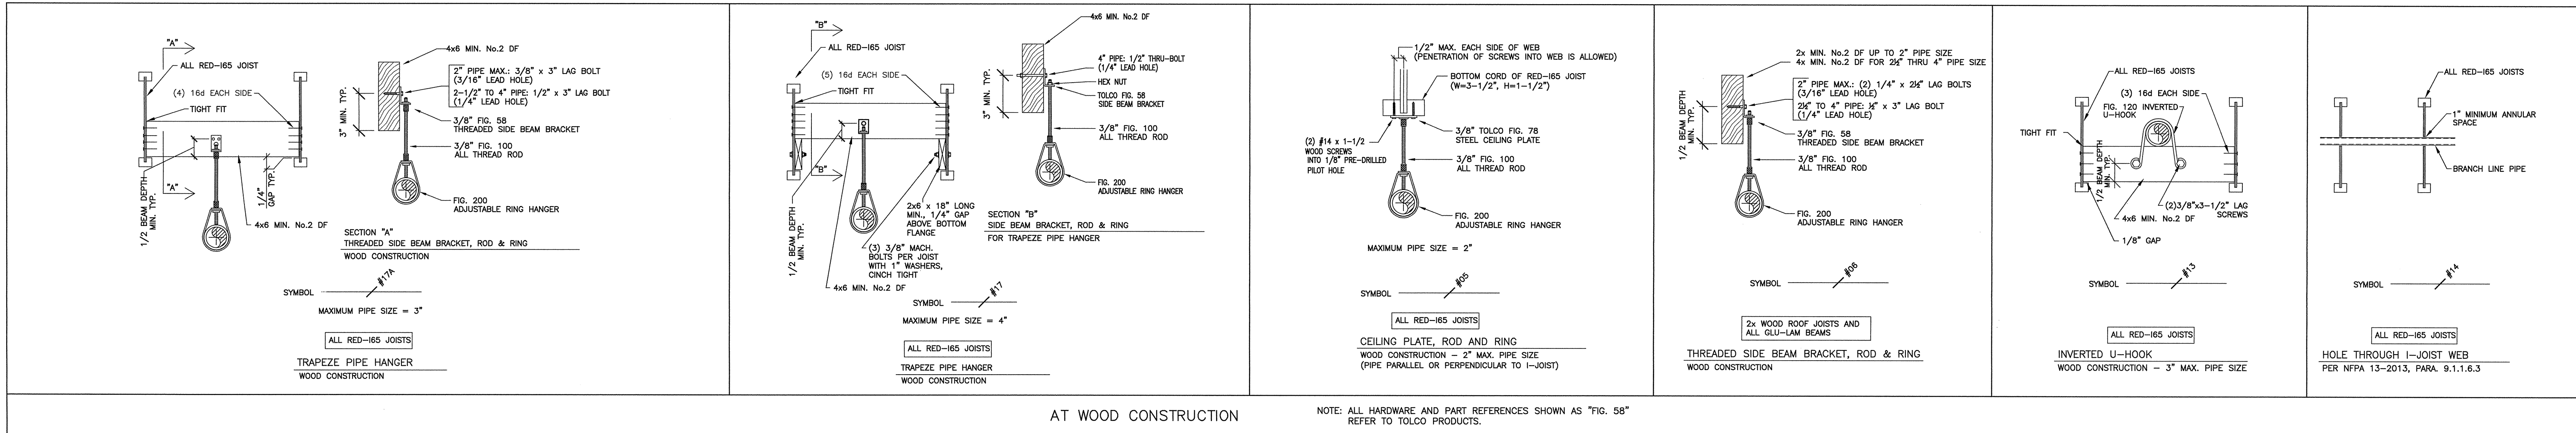

## FIRE PROTECTION HANGER DETAILS

SCALE : NONE


3  
FP0.2

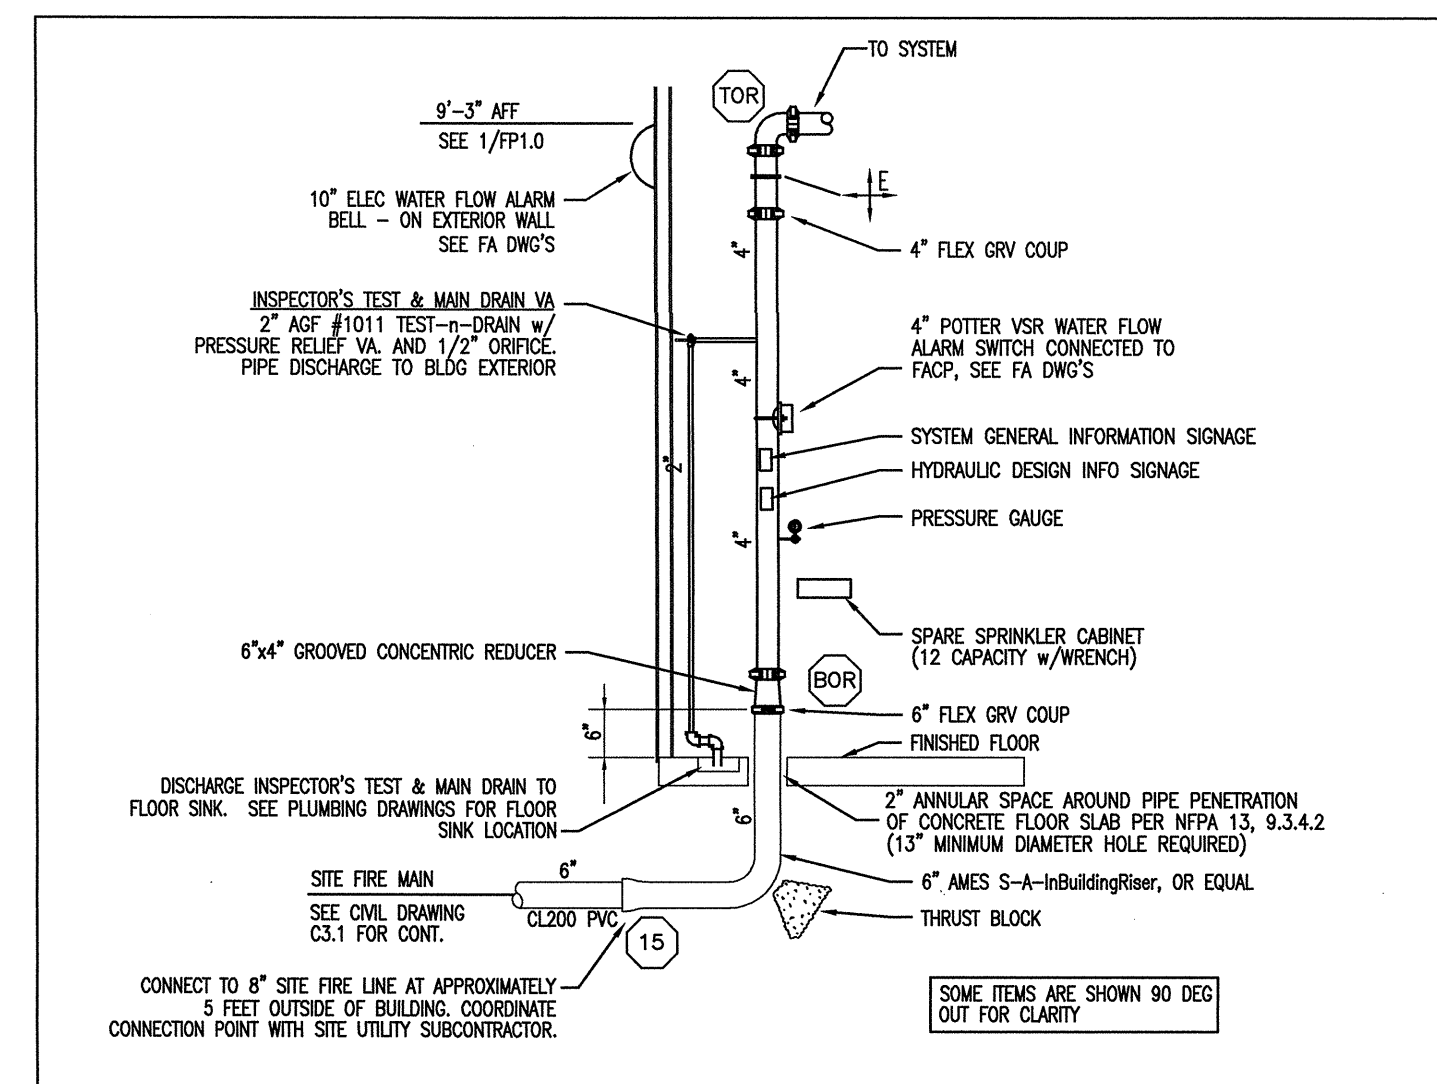

## FIRE PROTECTION RISER DETAIL

SCALE : NONE

1  
FP0.2

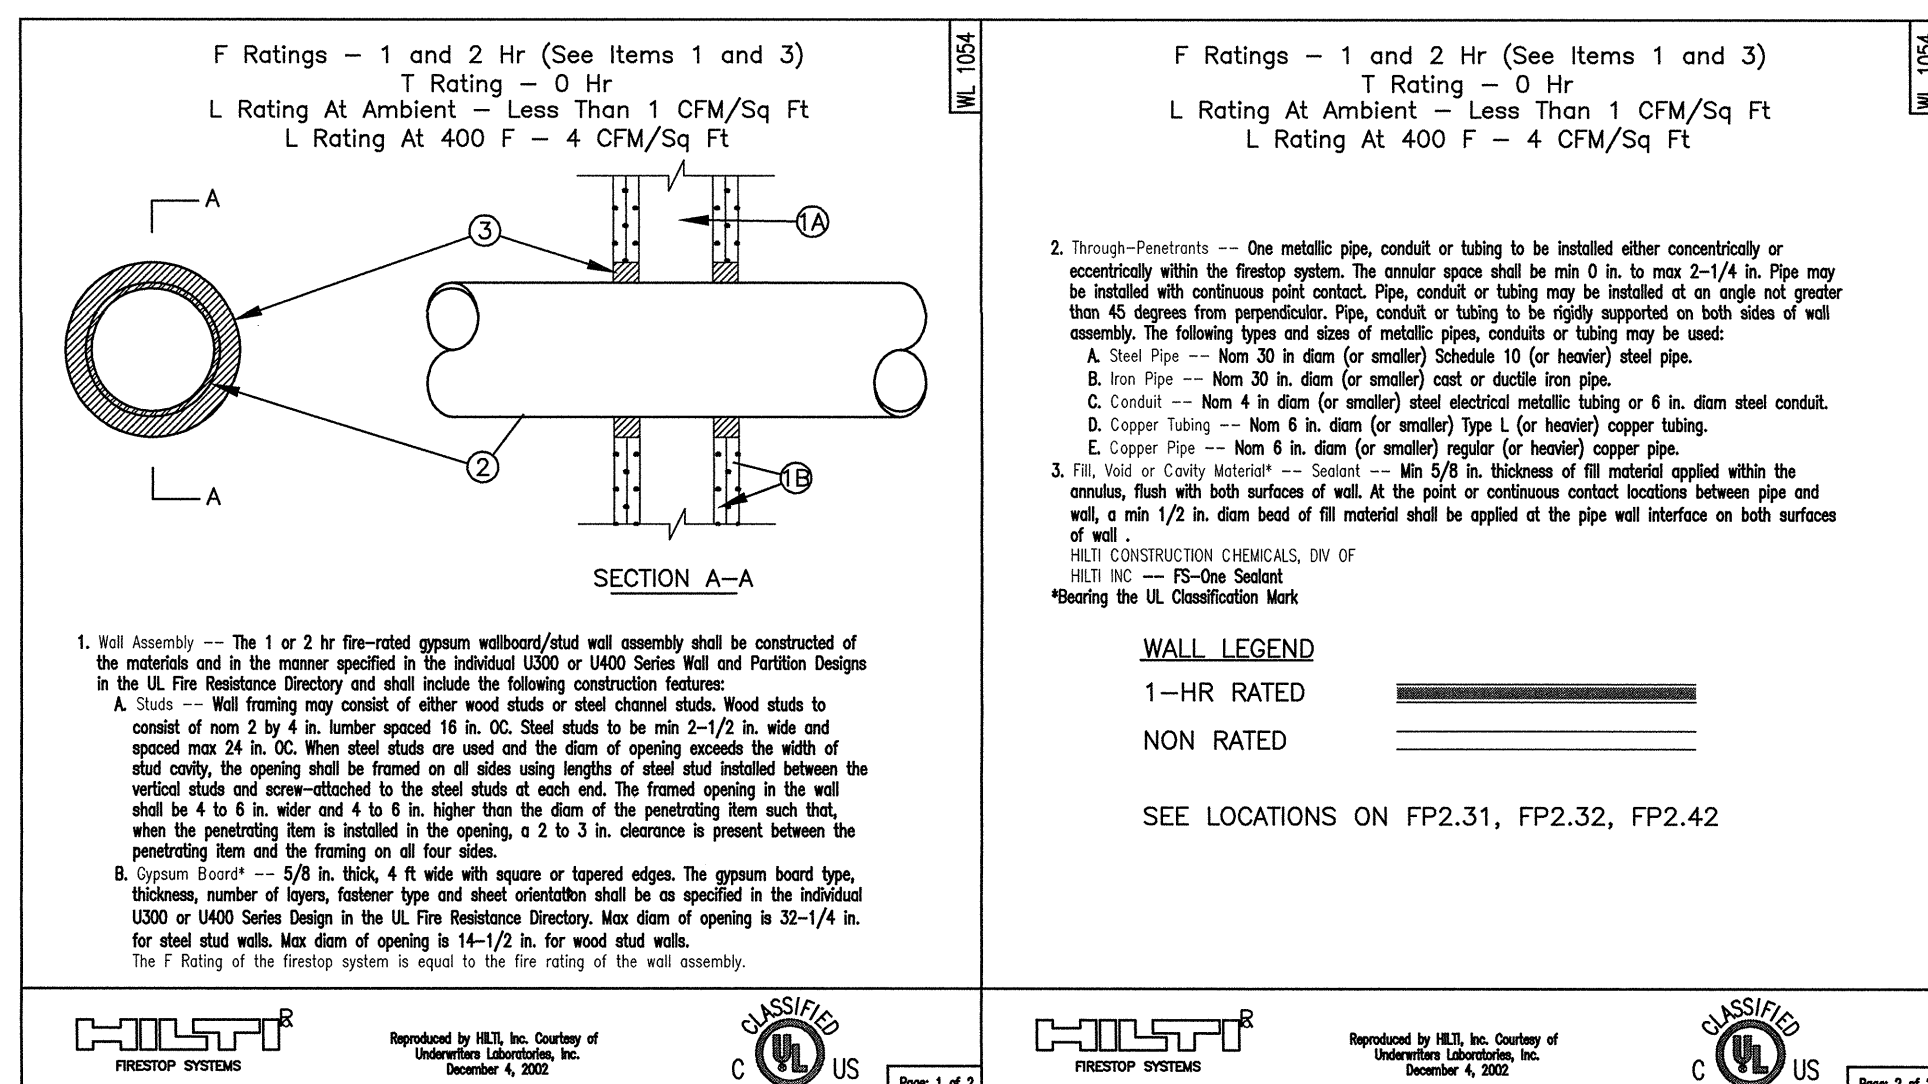

## FIRE PROTECTION PENETRATION DETAIL

SCALE : NONE

2  
FP0.2

# Dry Creek Joint Elementary School District District Education Center

8849 Cook Riolo Road, Roseville, CA 95747

Dry Creek Joint Elementary School District

FILE NO. 31-15

IDENTIFICATION STAMP DIV. OF THE  
STATE ARCHITECT OFFICE OF  
REGULATION SERVICES  
APPLICATION NO.  
02-115496  
AC. FLS 14-SS 62  
DATE 2/23/19 CEA

DIVISION OF THE STATE ARCHITECT

revision date: by:




DATE SIGNED: 2/15/2017

CAPITAL ENGINEERING  
CONSULTANTS, INC.  
RANCHO CORDOVA, CALIFORNIA  
RL 160110.00  
PM - DESIGN TEAM PROJECT NO.

CONSULTANT

# nacht&lewis

600 Q Street, Suite 100  
Sacramento, CA 95811  
www.nachtandlewis.com  
916.929.4000

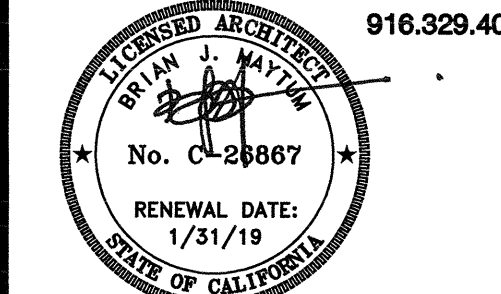

ARCHITECT

INITIAL BOX

| NO. | DWG BY | DATE | REVIEWED |
|-----|--------|------|----------|
|     |        |      |          |
|     |        |      |          |
|     |        |      |          |

REVISIONS

| NO. | DESCRIPTION | DATE | REV'D |
|-----|-------------|------|-------|
|     |             |      |       |
|     |             |      |       |
|     |             |      |       |

DATE February 23, 2017

JOB NO. Y1538.00

SHEET TITLE

## Fire Protection Details


SHEET NO.

FP0.2

SHEET OF TOTAL



ONE INCH = TWENTY FEET  
ONE-SIXTEENTH INCH = ONE FOOT  
ONE-EIGHTH INCH = ONE FOOT  
ONE-FOURTH INCH = ONE FOOT  
ONE-HALF INCH = ONE FOOT  
THREE-QUARTERS INCH = ONE FOOT  
ONE AND ONE-HALF INCH = ONE FOOT

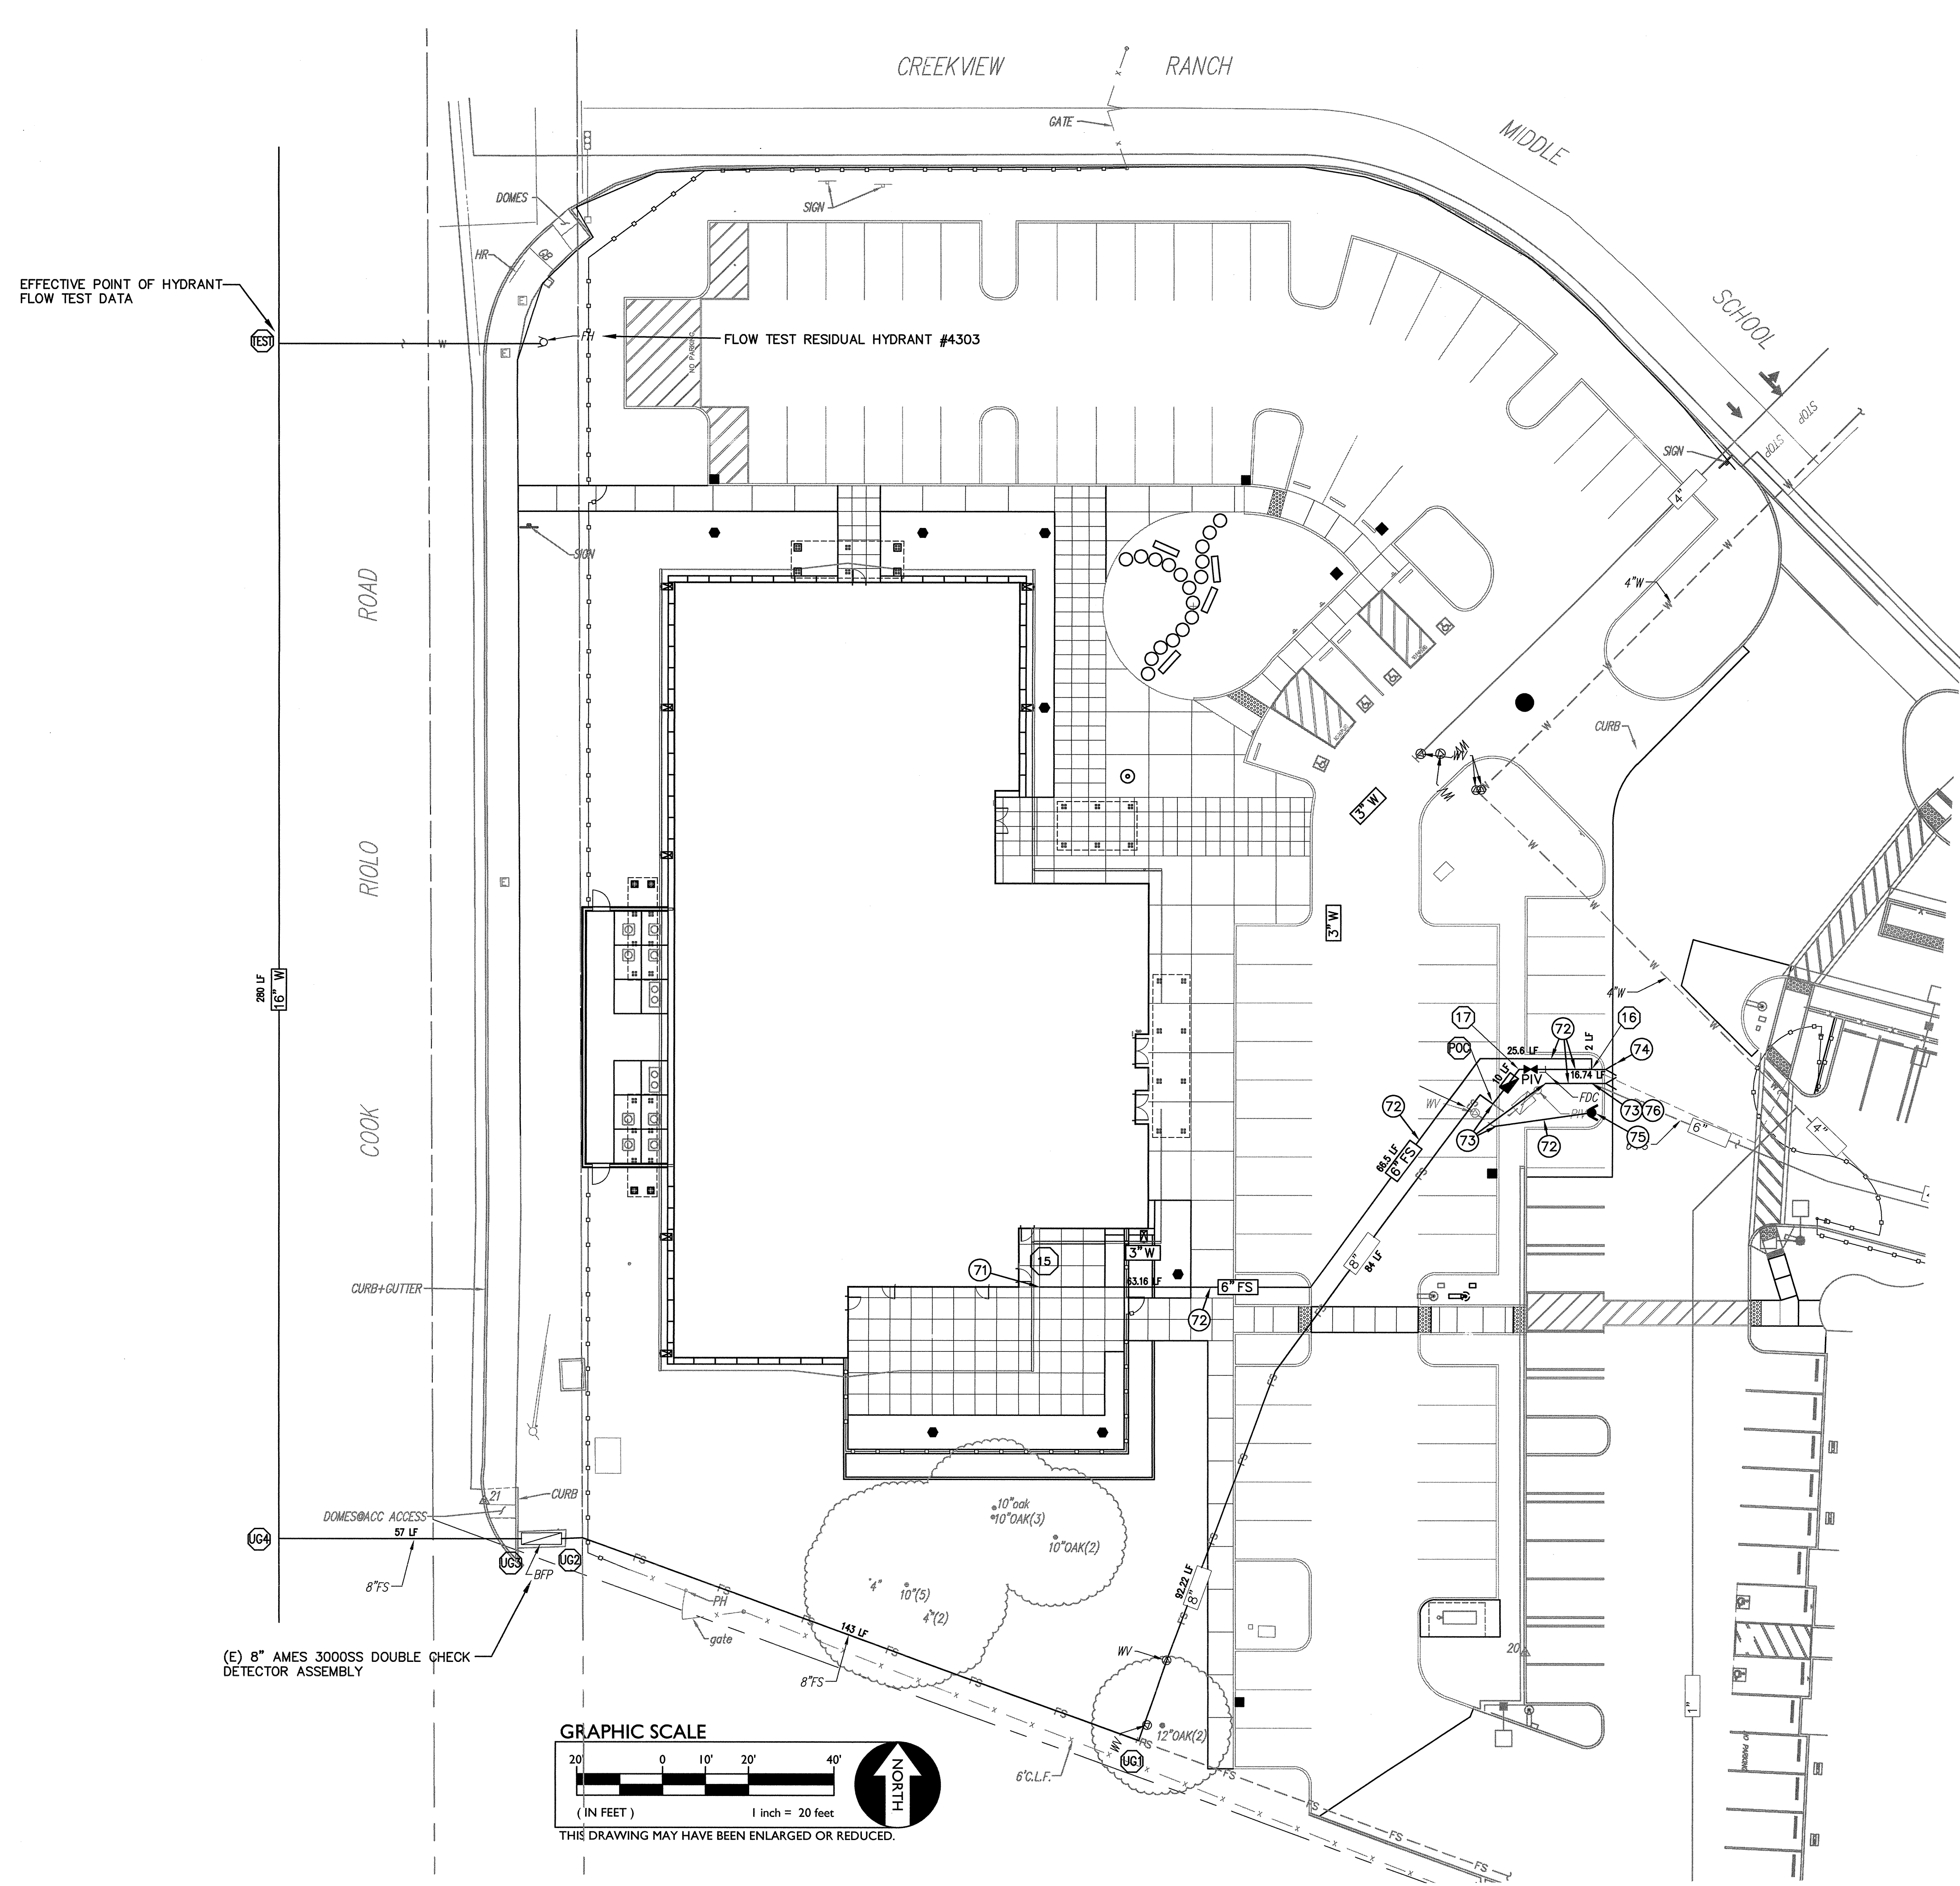

FIRE PROTECTION SITE PLAN  
SCALE : 1"=20'

SHEET NOTES:  
1. THIS PLAN IS FOR THE BUILDING OVERHEAD FIRE SPRINKLER SYSTEM HYDRAULIC CALCULATION REFERENCE ONLY. SEE CIVIL PLAN C3.1 FOR SITE FIRE PROTECTION DESIGN, DETAILS AND NOTES.  
2. INSTALLATION OF THE SITE FIRE LINE IS TO BE BY THE SITE UTILITY SUBCONTRACTOR.

- FIRE PROTECTION NOTES**
- 71. CONNECTION TO BUILDING FIRE SPRINKLER SERVICE. SEE 1/FP1.0
  - 72. 6" FIRE SPRINKLER PIPE.
  - 73. CONNECTION TO EXISTING FIRE SERVICE.
  - 74. FIRE DEPARTMENT CONNECTION WITH POST INDICATOR AND SINGLE CHECK VALVE.
  - 75. FIRE HYDRANT.
  - 76. EXISTING FIRE DEPARTMENT CONNECTION.

Dry Creek Joint Elementary School District  
District Education Center  
8849 Cook Riolo Road, Roseville, CA 95747  
Dry Creek Joint Elementary School District

FILE NO. 31-15  
IDENTIFICATION STAMP DIV. OF THE  
STATE ARCHITECT OFFICE OF  
REGULATION SERVICES  
APPLICATION NO.  
02-115496  
AC. M. FLS. J. M. SS. J. M.  
DATE 2/23/19  
DIVISION OF THE STATE ARCHITECT  
revision date: by:

REGISTERED PROFESSIONAL ENGINEER  
THOMAS A. DAVIS  
M 22984  
EXPIRES 7/30/19  
STATE OF CALIFORNIA  
DATE SIGNED: 2/15/2017  
CAPITAL ENGINEERING  
CONSULTANTS, INC.  
RANCHO CORDOVA, CALIFORNIA  
RL 160110.00  
PM - DESIGN TEAM PROJECT NO.  
CONSULTANT

nacht&lewis  
600 Q Street, Suite 100  
Sacramento, CA 95811  
www.nachtandlewis.com  
916.329.4000  
REGISTERED ARCHITECT  
No. C-20867  
RENEWAL DATE:  
1/31/19  
STATE OF CALIFORNIA  
ARCHITECT


ARCHITECT

| INITIAL BOX |                            |                   |          |
|-------------|----------------------------|-------------------|----------|
| NO.         | DWG BY                     | DATE              | REVIEWED |
|             |                            |                   |          |
|             |                            |                   |          |
|             |                            |                   |          |
| REVISIONS   |                            |                   |          |
| NO.         | DESCRIPTION                | DATE              | REV'D    |
|             | 100% design development    | 7/6/16            |          |
|             | 75% construction documents | 9/20/16           |          |
|             | DSA submittal              | 12/31/16          |          |
|             | DSA approval               | 02/23/17          |          |
|             |                            |                   |          |
|             |                            |                   |          |
| DATE        |                            | February 23, 2017 |          |
| JOB NO.     |                            | Y1538.00          |          |
| SHEET TITLE |                            |                   |          |

Fire Protection Site Plan  
SHEET NO.  
FP0.3  
SHEET \_\_\_\_ OF \_\_\_\_ TOTAL



ONE AND ONE-HALF INCH = ONE FOOT  
ONE INCH = ONE FOOT  
THREE-QUARTERS INCH = ONE FOOT  
ONE-HALF INCH = ONE FOOT  
ONE-QUARTER INCH = ONE FOOT  
ONE-EIGHTH INCH = ONE FOOT  
ONE-SIXTEENTH INCH = ONE FOOT  
ONE INCH = TWENTY FEET

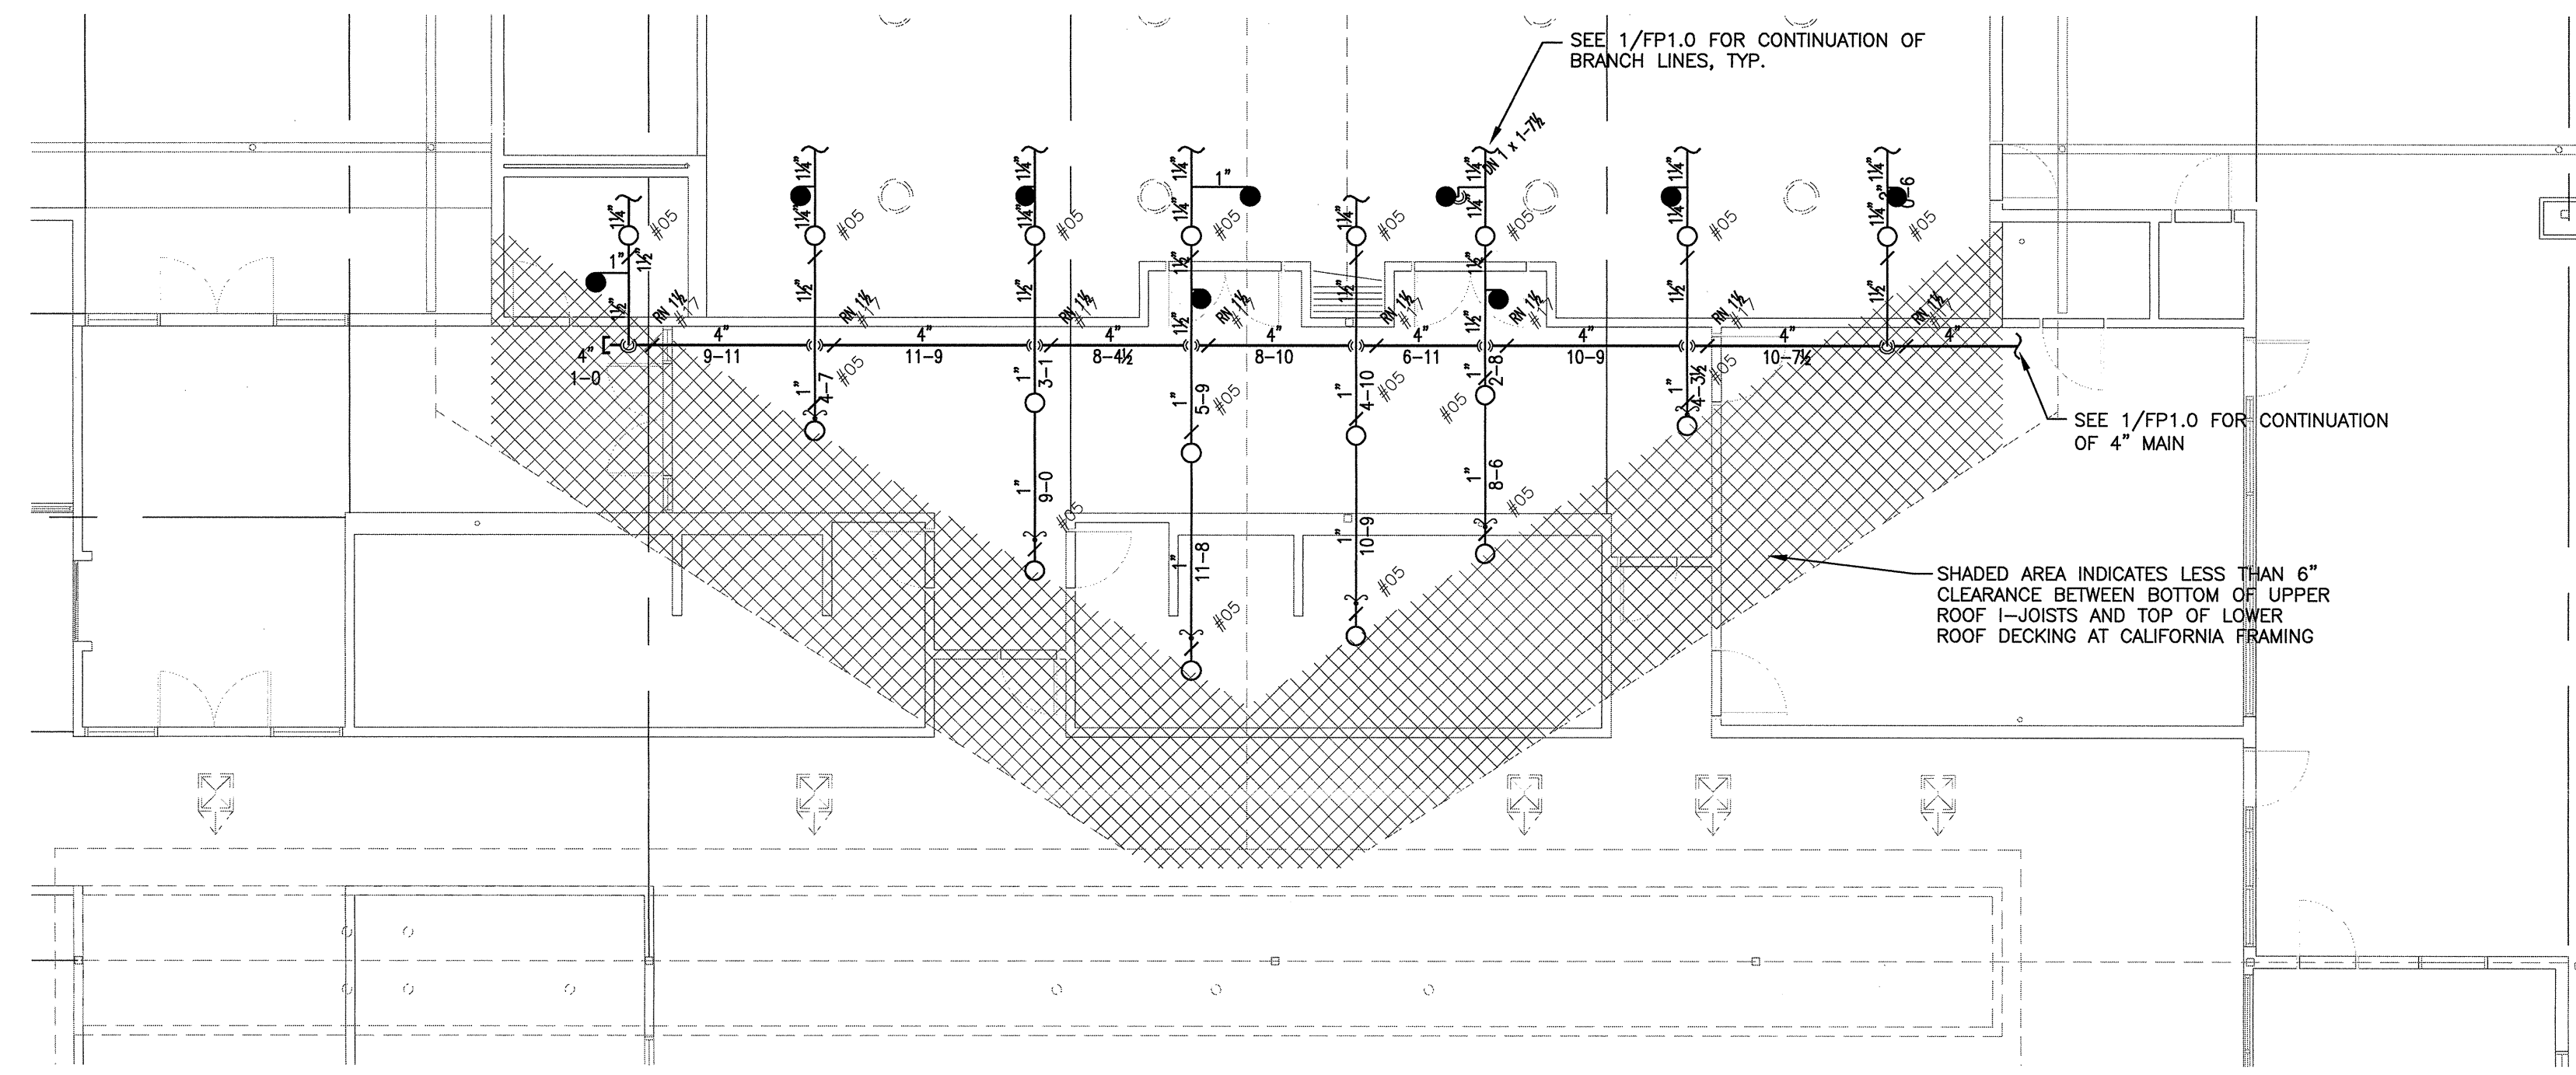


FIRE PROTECTION ATTIC PLAN

SCALE : 1/8"=1'-0"

2  
FP1.0

| Sprinkler Head Schedule                |       |        |          |                           | Note    |
|----------------------------------------|-------|--------|----------|---------------------------|---------|
| Symbol                                 | Count | Thread | K-Factor | Description               |         |
| ○                                      | 136   | 1/2"   | 5.6      | TY313 1/2 QR 200 B UP     |         |
| ⊗                                      | 60    | 1/2"   | 5.6      | TY313 1/2 QR 155 BLACK UP |         |
| ●                                      | 106   | 1/2"   | 5.6      | TY323 1/2 QR 155 WH PDR   | on Drop |
| 302 = Total Number of Heads This Floor |       |        |          |                           |         |

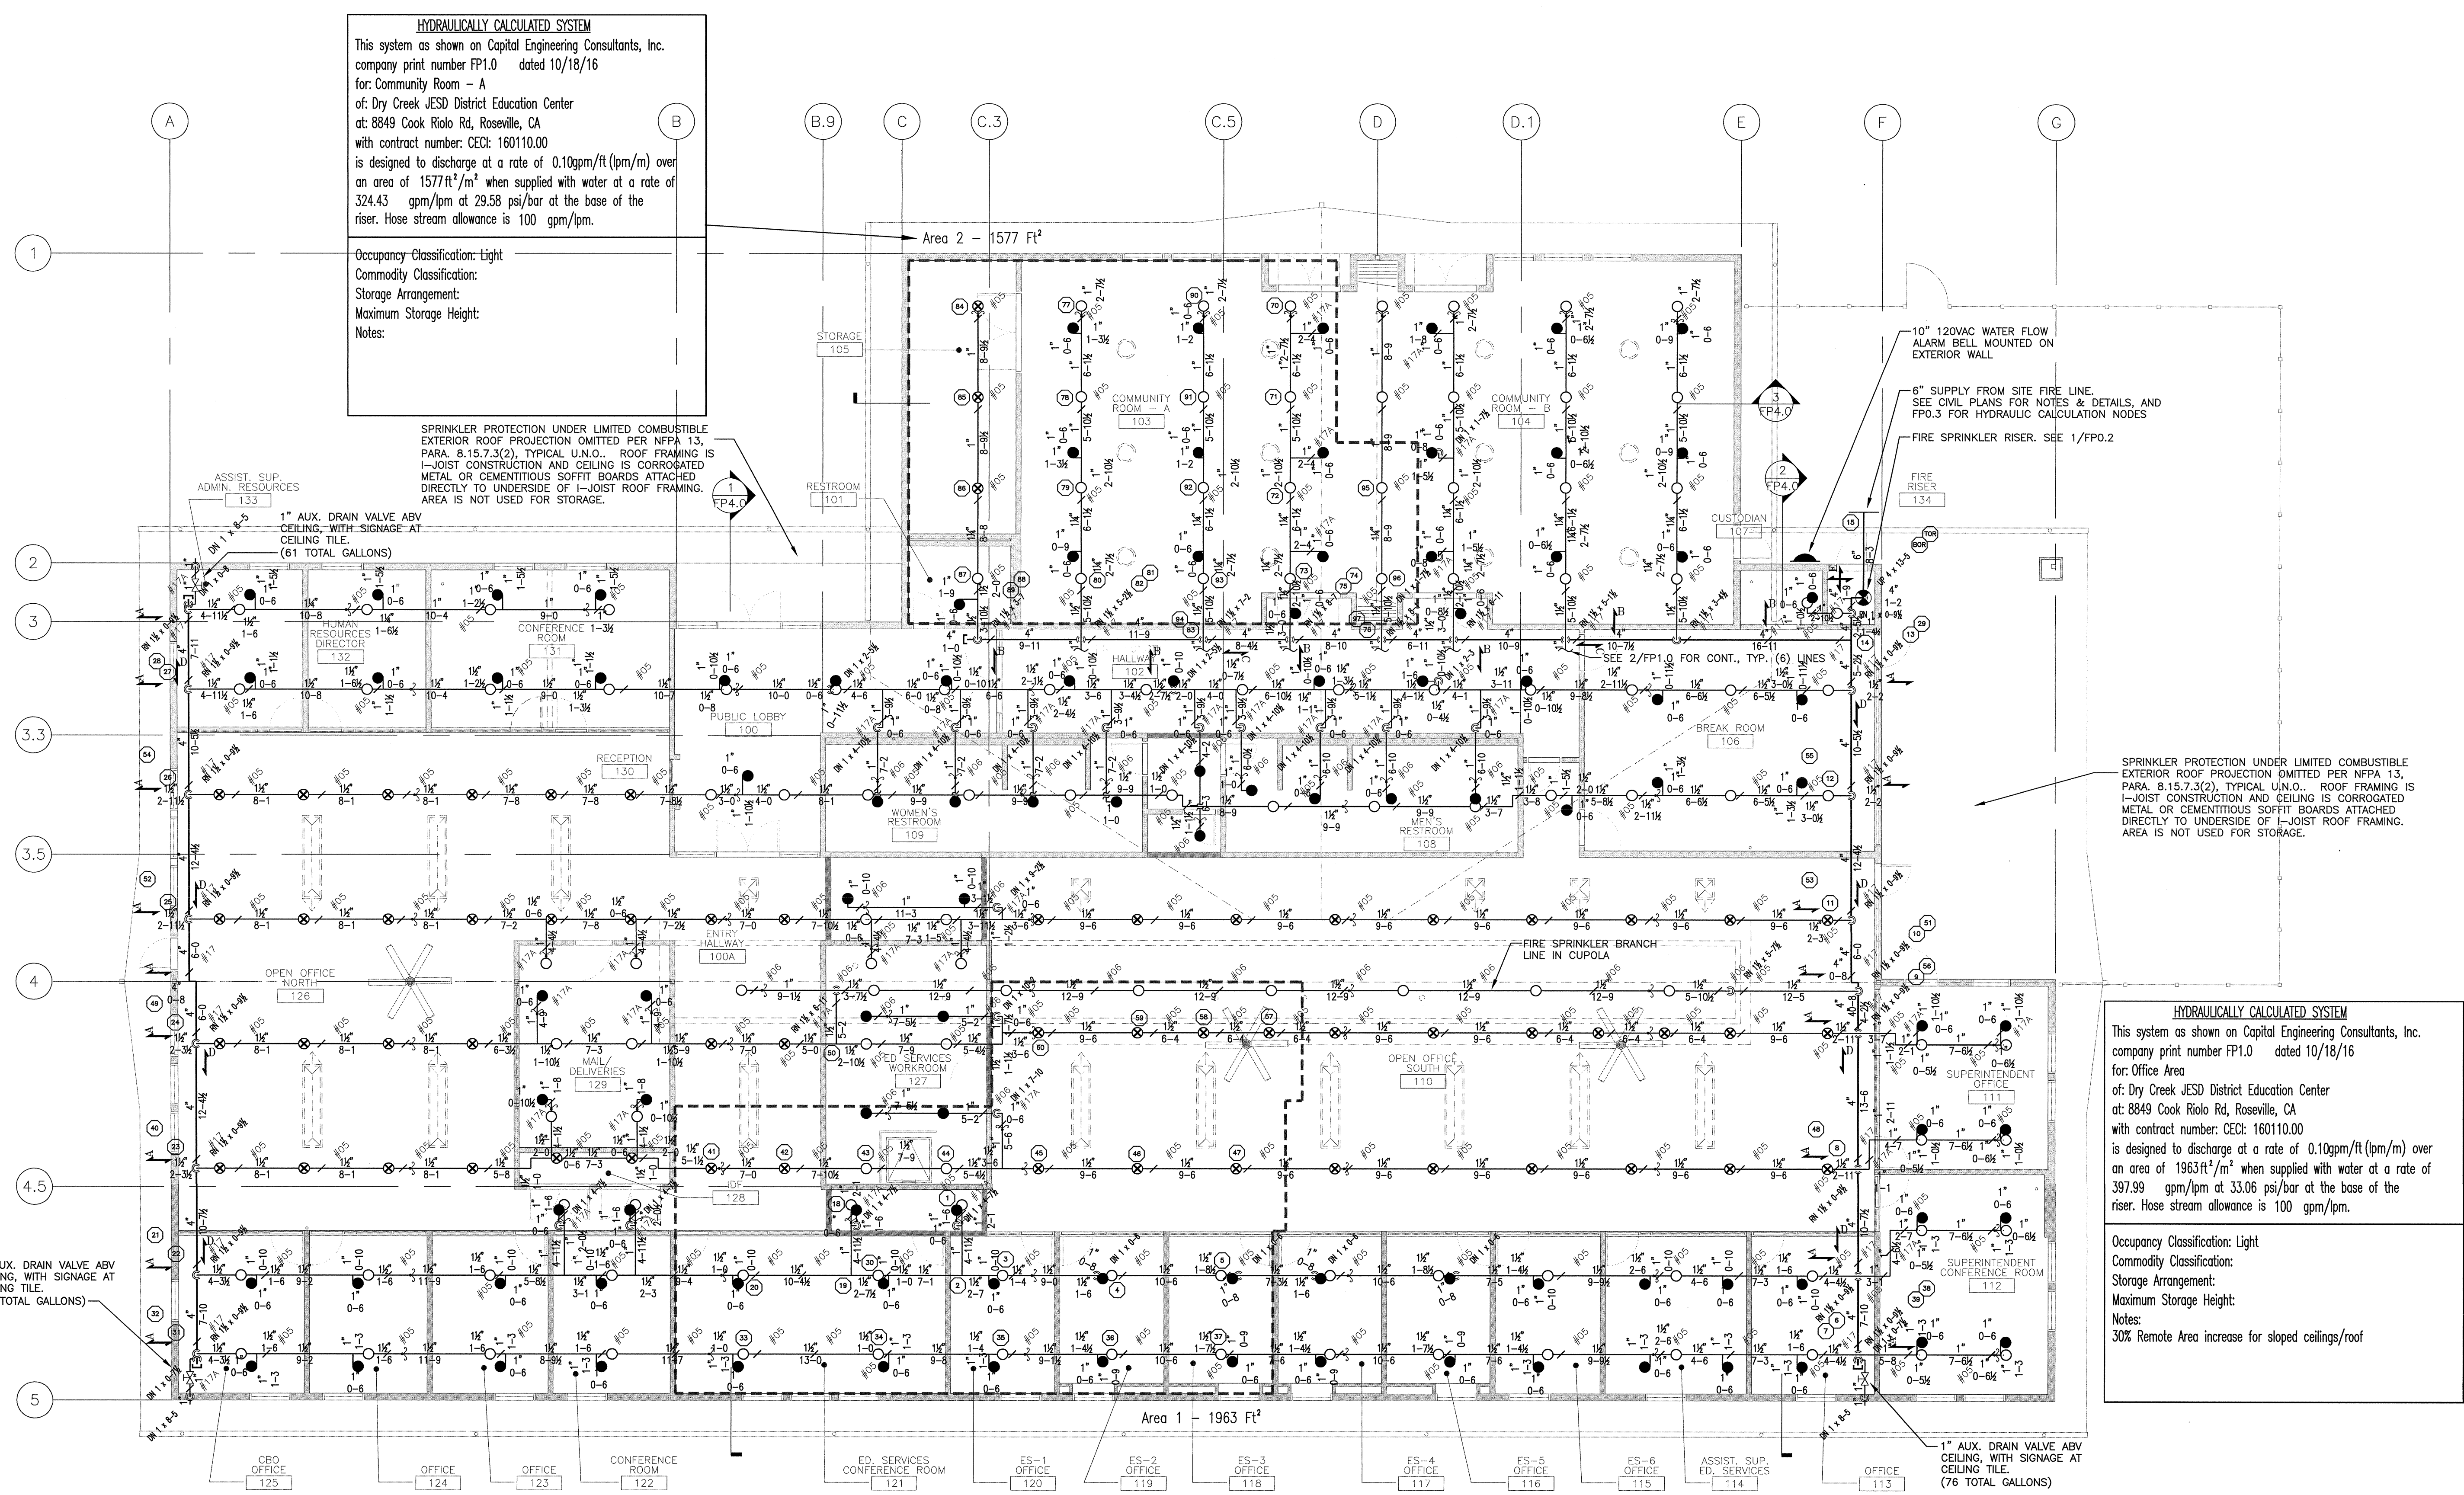

FIRE PROTECTION FLOOR PLAN

SCALE : 1/8"=1'-0"

1  
FP1.0

**HYDRAULICALLY CALCULATED SYSTEM**  
This system as shown on Capital Engineering Consultants, Inc. company print number FP1.0 dated 10/18/16 for: Office Area of: Dry Creek JESD District Education Center at: 8849 Cook Riolo Rd, Roseville, CA with contract number: CEC: 160110.00 is designed to discharge at a rate of 0.10gpm/ft² (lpm/m) over an area of 1963ft²/m² when supplied with water at a rate of 397.99 gpm/lpm at 33.06 psi/bar at the base of the riser. Hose stream allowance is 100 gpm/lpm.

Occupancy Classification: Light  
Commodity Classification:  
Storage Arrangement:  
Maximum Storage Height:  
Notes:  
30% Remote Area increase for sloped ceilings/roof

Dry Creek Joint Elementary School District  
District Education Center  
8849 Cook Riolo Road, Roseville, CA 95747  
Dry Creek Joint Elementary School District

FILE NO. 31-15  
IDENTIFICATION STAMP DIV. OF THE  
STATE ARCHITECT OFFICE OF  
REGULATION SERVICES  
APPLICATION NO.  
02-115496  
AC: TMA, FLS, HMC, SS, JPC  
DATE: 1/23/19 CJA

DIVISION OF THE STATE ARCHITECT  
revision date: by:

REGISTERED PROFESSIONAL ENGINEER  
THOMAS A. DAVIS  
No. 22841  
MECHANICAL  
STATE OF CALIFORNIA  
DATE SIGNED: 2/15/2017

CAPITAL ENGINEERING  
CONSULTANTS, INC.  
RANCHO CORDOVA, CALIFORNIA  
RL  
PM - DESIGN TEAM  
160110.00  
PROJECT NO.

CONSULTANT

nacht&lewis  
600 Q Street, Suite 100  
Sacramento, CA 95811  
www.nachtandlewis.com  
916.329.4000

REGISTERED ARCHITECT  
BRIAN J. WATKINS  
No. C-28667  
RENEWAL DATE:  
1/31/19  
STATE OF CALIFORNIA

ARCHITECT

| INITIAL BOX |        |      |          |
|-------------|--------|------|----------|
| NO.         | DWG BY | DATE | REVIEWED |
|             |        |      |          |
|             |        |      |          |

| REVISIONS |             |      |     |
|-----------|-------------|------|-----|
| NO.       | DESCRIPTION | DATE | REV |
|           |             |      |     |
|           |             |      |     |
|           |             |      |     |


DATE February 23, 2017  
JOB NO. Y1538.00  
SHEET TITLE

Fire Protection Floor Plan

SHEET NO.  
FP1.0  
SHEET \_\_\_\_ OF \_\_\_\_ TOTAL



ONE INCH = TWENTY FEET  
ONE-SIXTEENTH INCH = ONE FOOT  
ONE-EIGHTH INCH = ONE FOOT  
ONE-FOURTH INCH = ONE FOOT  
ONE-HALF INCH = ONE FOOT  
THREE-QUARTERS INCH = ONE FOOT  
ONE INCH = ONE FOOT  
ONE AND ONE-HALF INCH = ONE FOOT

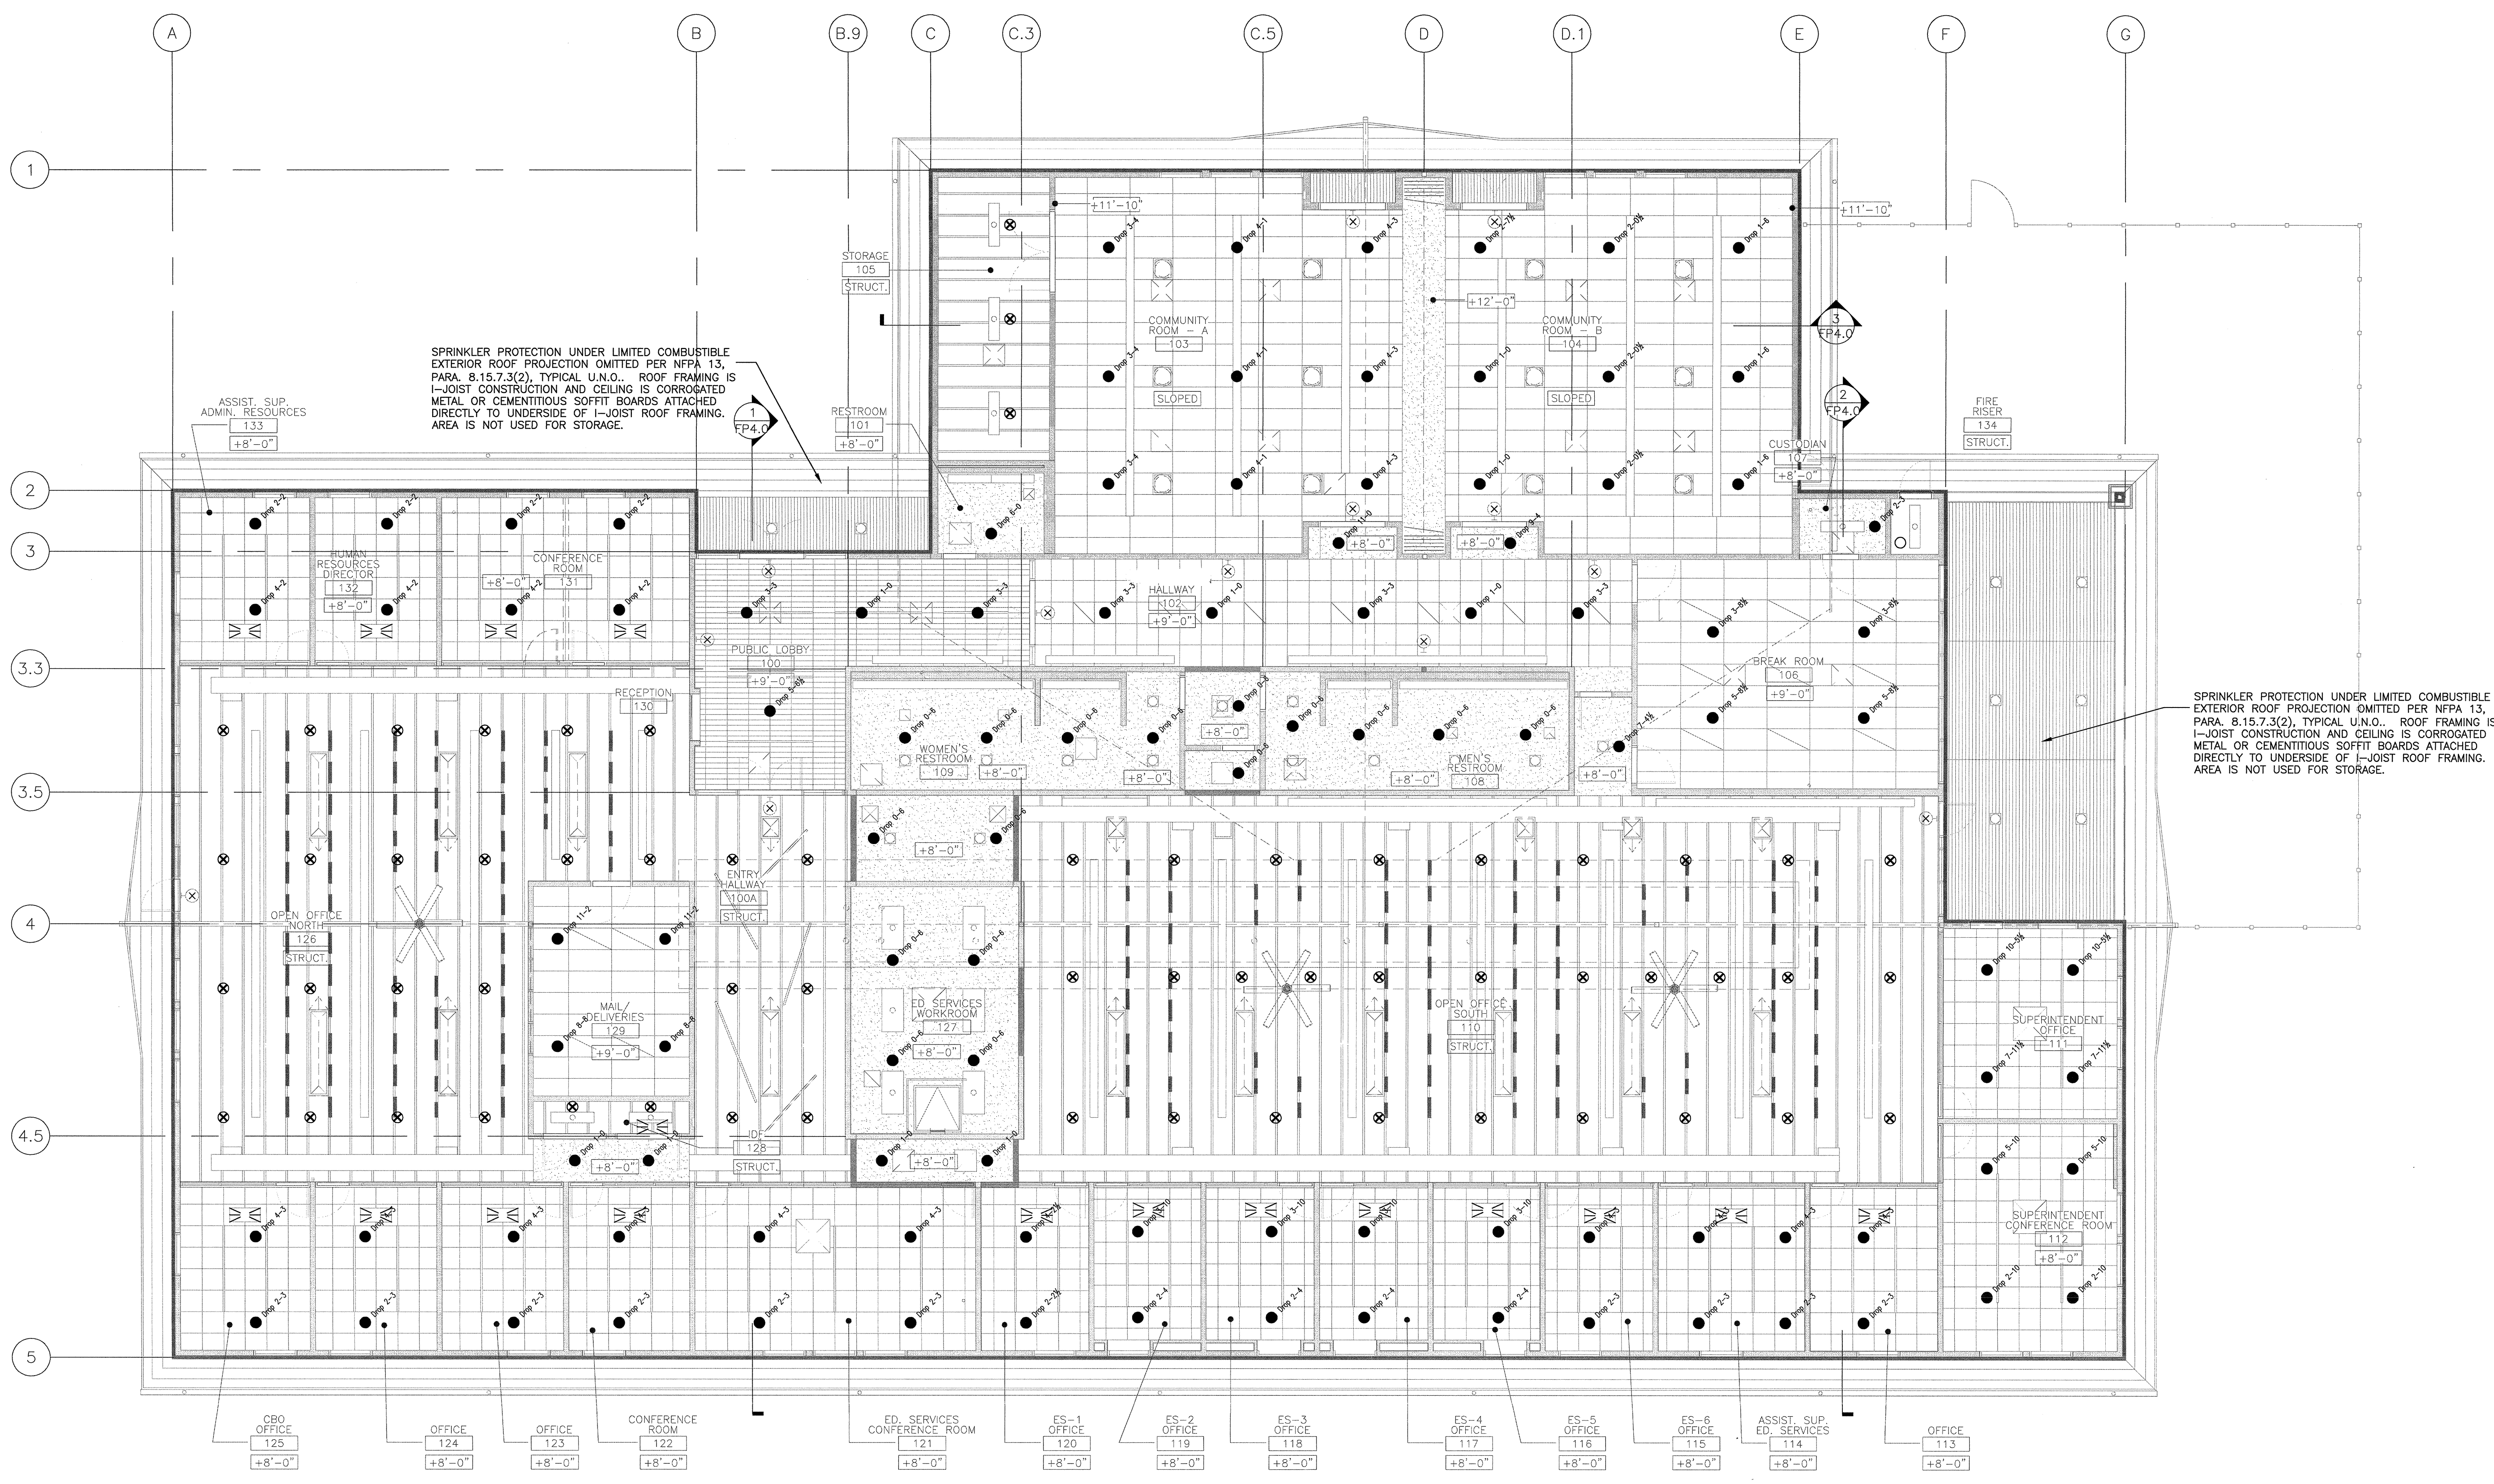

FIRE PROTECTION REFLECTED CEILING PLAN  
SCALE : 1/8"=1'-0"  
1  
FP2.0

| Sprinkler Head Schedule                |       |        |          |                           |         |
|----------------------------------------|-------|--------|----------|---------------------------|---------|
| Symbol                                 | Count | Thread | K-Factor | Description               | Note    |
| ○                                      | 136   | 1/2"   | 5.6      | TY313 1/2 QR 200 B UP     |         |
| ⊗                                      | 60    | 1/2"   | 5.6      | TY313 1/2 QR 155 BLACK UP |         |
| ●                                      | 106   | 1/2"   | 5.6      | TY323 1/2 QR 155 WH PDR   | on Drop |
| 302 = Total Number of Heads This Floor |       |        |          |                           |         |

Dry Creek Joint Elementary School District  
District Education Center  
8849 Cook Riolo Road, Roseville, CA 95747  
Dry Creek Joint Elementary School District

FILE NO. 31-15  
IDENTIFICATION STAMP DIV. OF THE  
STATE ARCHITECT OFFICE OF  
REGULATION SERVICES  
APPLICATION NO.  
02-115496  
AC TM FL SS  
DATE 2/15/2017

DIVISION OF THE STATE ARCHITECT  
revision date: by:

REGISTERED PROFESSIONAL ENGINEER  
THOMAS A. BOWEN  
No. 22894  
EXPIRATION DATE 12/31/16  
STATE OF CALIFORNIA  
DATE SIGNED: 2/15/2017

CAPITAL ENGINEERING  
CONSULTANTS, INC.  
RANCHO CORDOVA, CALIFORNIA  
RL  
PM - DESIGN TEAM  
160110.00  
PROJECT NO.

CONSULTANT

nacht&lewis  
600 Q Street, Suite 100  
Sacramento, CA 95811  
www.nachtandlewis.com  
916.329.4000

REGISTERED ARCHITECT  
MICHAEL J. MAYER  
No. C-29667  
RENEWAL DATE: 1/31/19  
STATE OF CALIFORNIA

ARCHITECT

INITIAL BOX

| NO. | DWG BY | DATE | REVIEWED |
|-----|--------|------|----------|
|     |        |      |          |
|     |        |      |          |

REVISIONS

| NO. | DESCRIPTION                | DATE     | REV |
|-----|----------------------------|----------|-----|
|     | 100% design development    | 7/8/16   |     |
|     | 75% construction documents | 9/29/16  |     |
|     | DSA submittal              | 12/21/16 |     |
|     | DSA approval               | 02/23/17 |     |

DATE February 23, 2017

JOB NO. Y1538.00

SHEET TITLE

Fire Protection  
Reflected Ceiling  
Plan




SHEET NO.

FP2.0

SHEET OF TOTAL



ONE INCH = TWENTY FEET  
ONE-SIXTEENTH INCH = ONE FOOT  
ONE-EIGHTH INCH = ONE FOOT  
ONE-FOURTH INCH = ONE FOOT  
ONE-HALF INCH = ONE FOOT  
THREE-QUARTERS INCH = ONE FOOT  
ONE INCH = ONE FOOT  
ONE AND ONE-HALF INCH = ONE FOOT

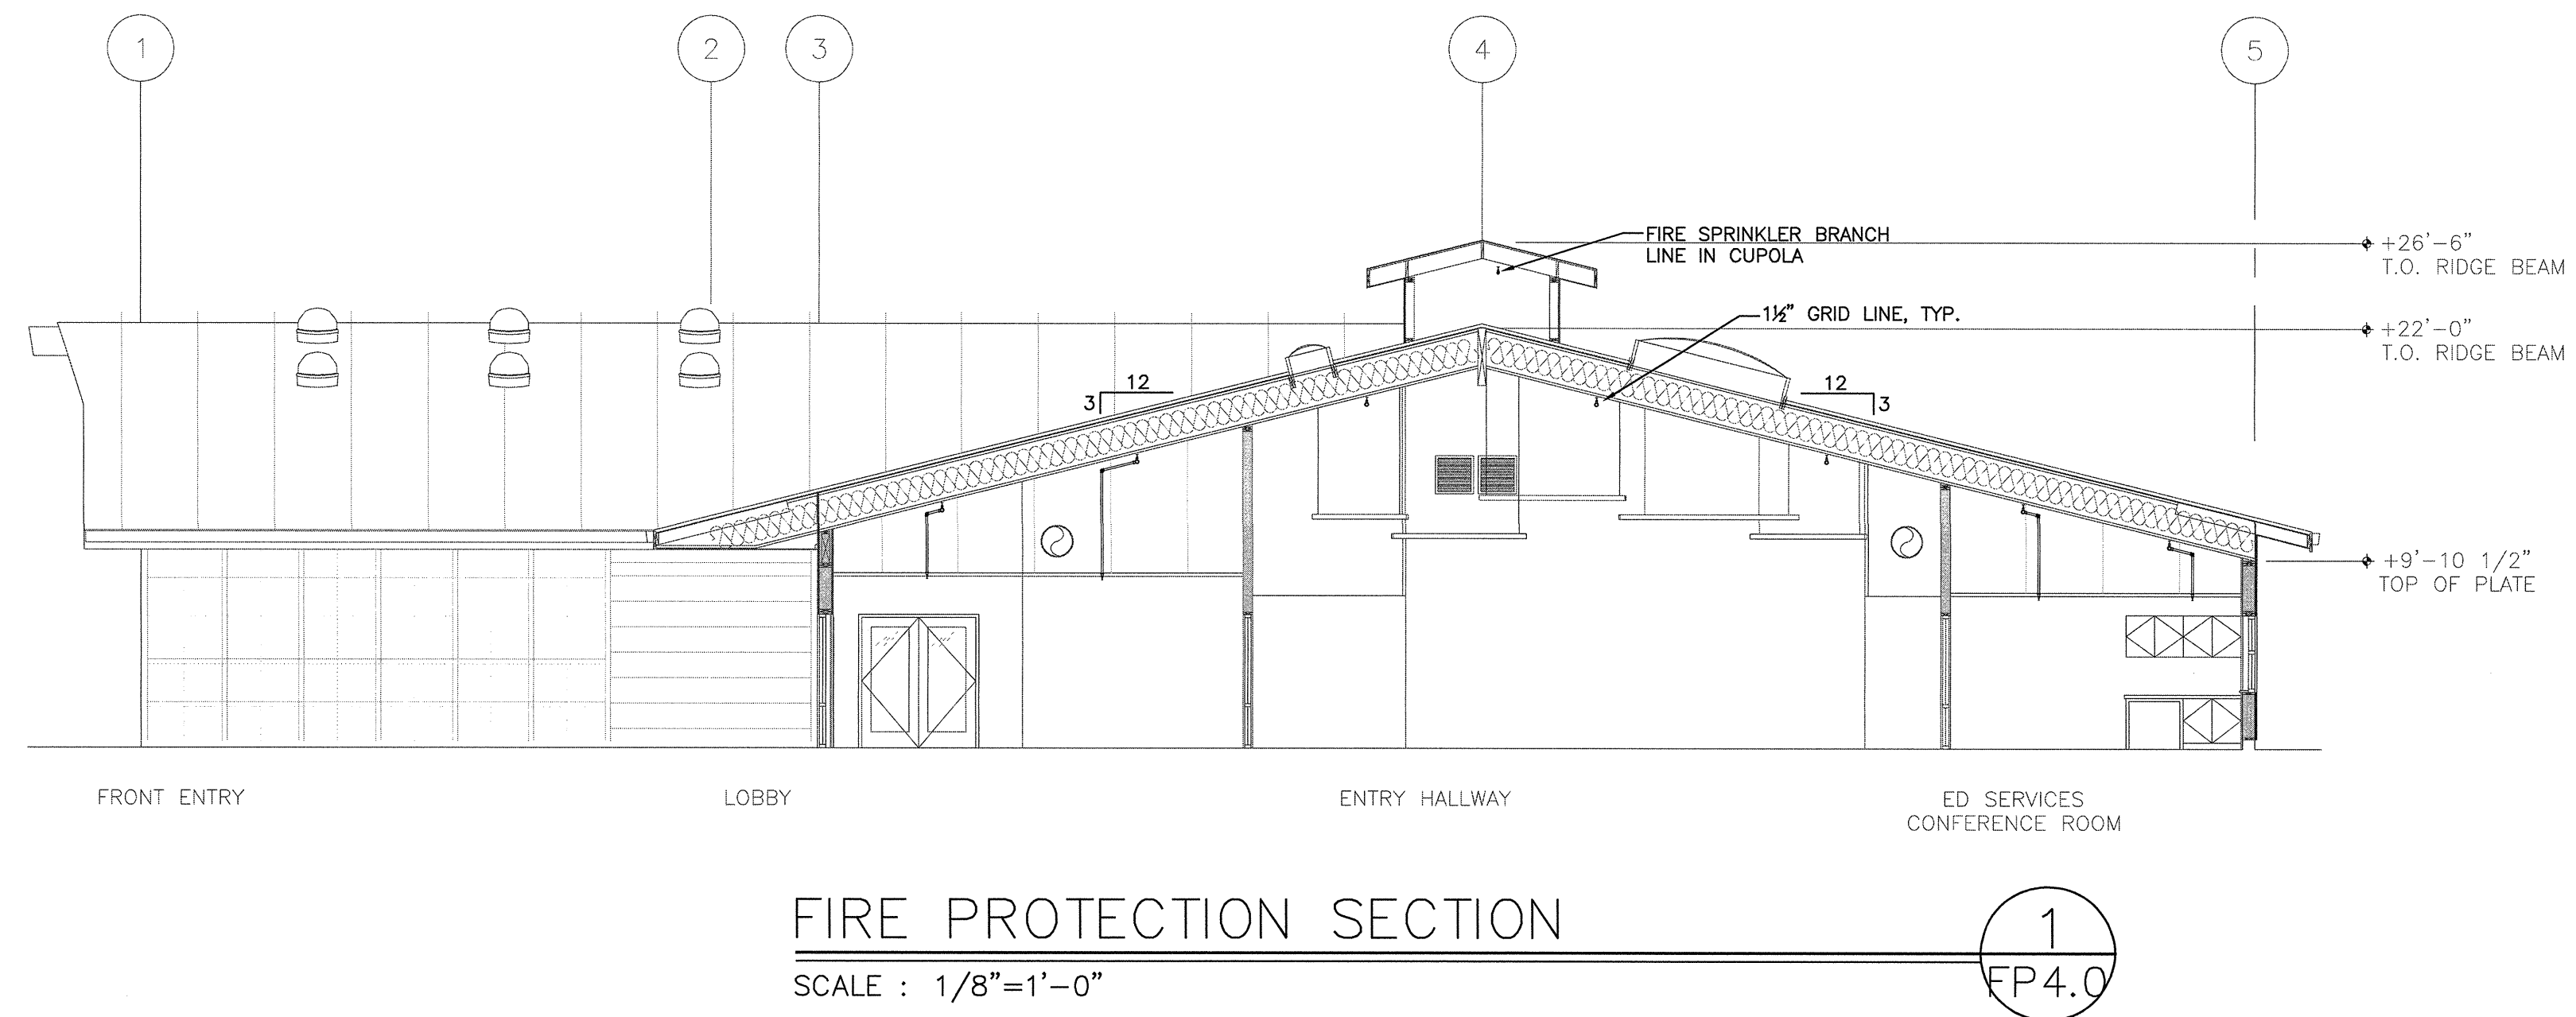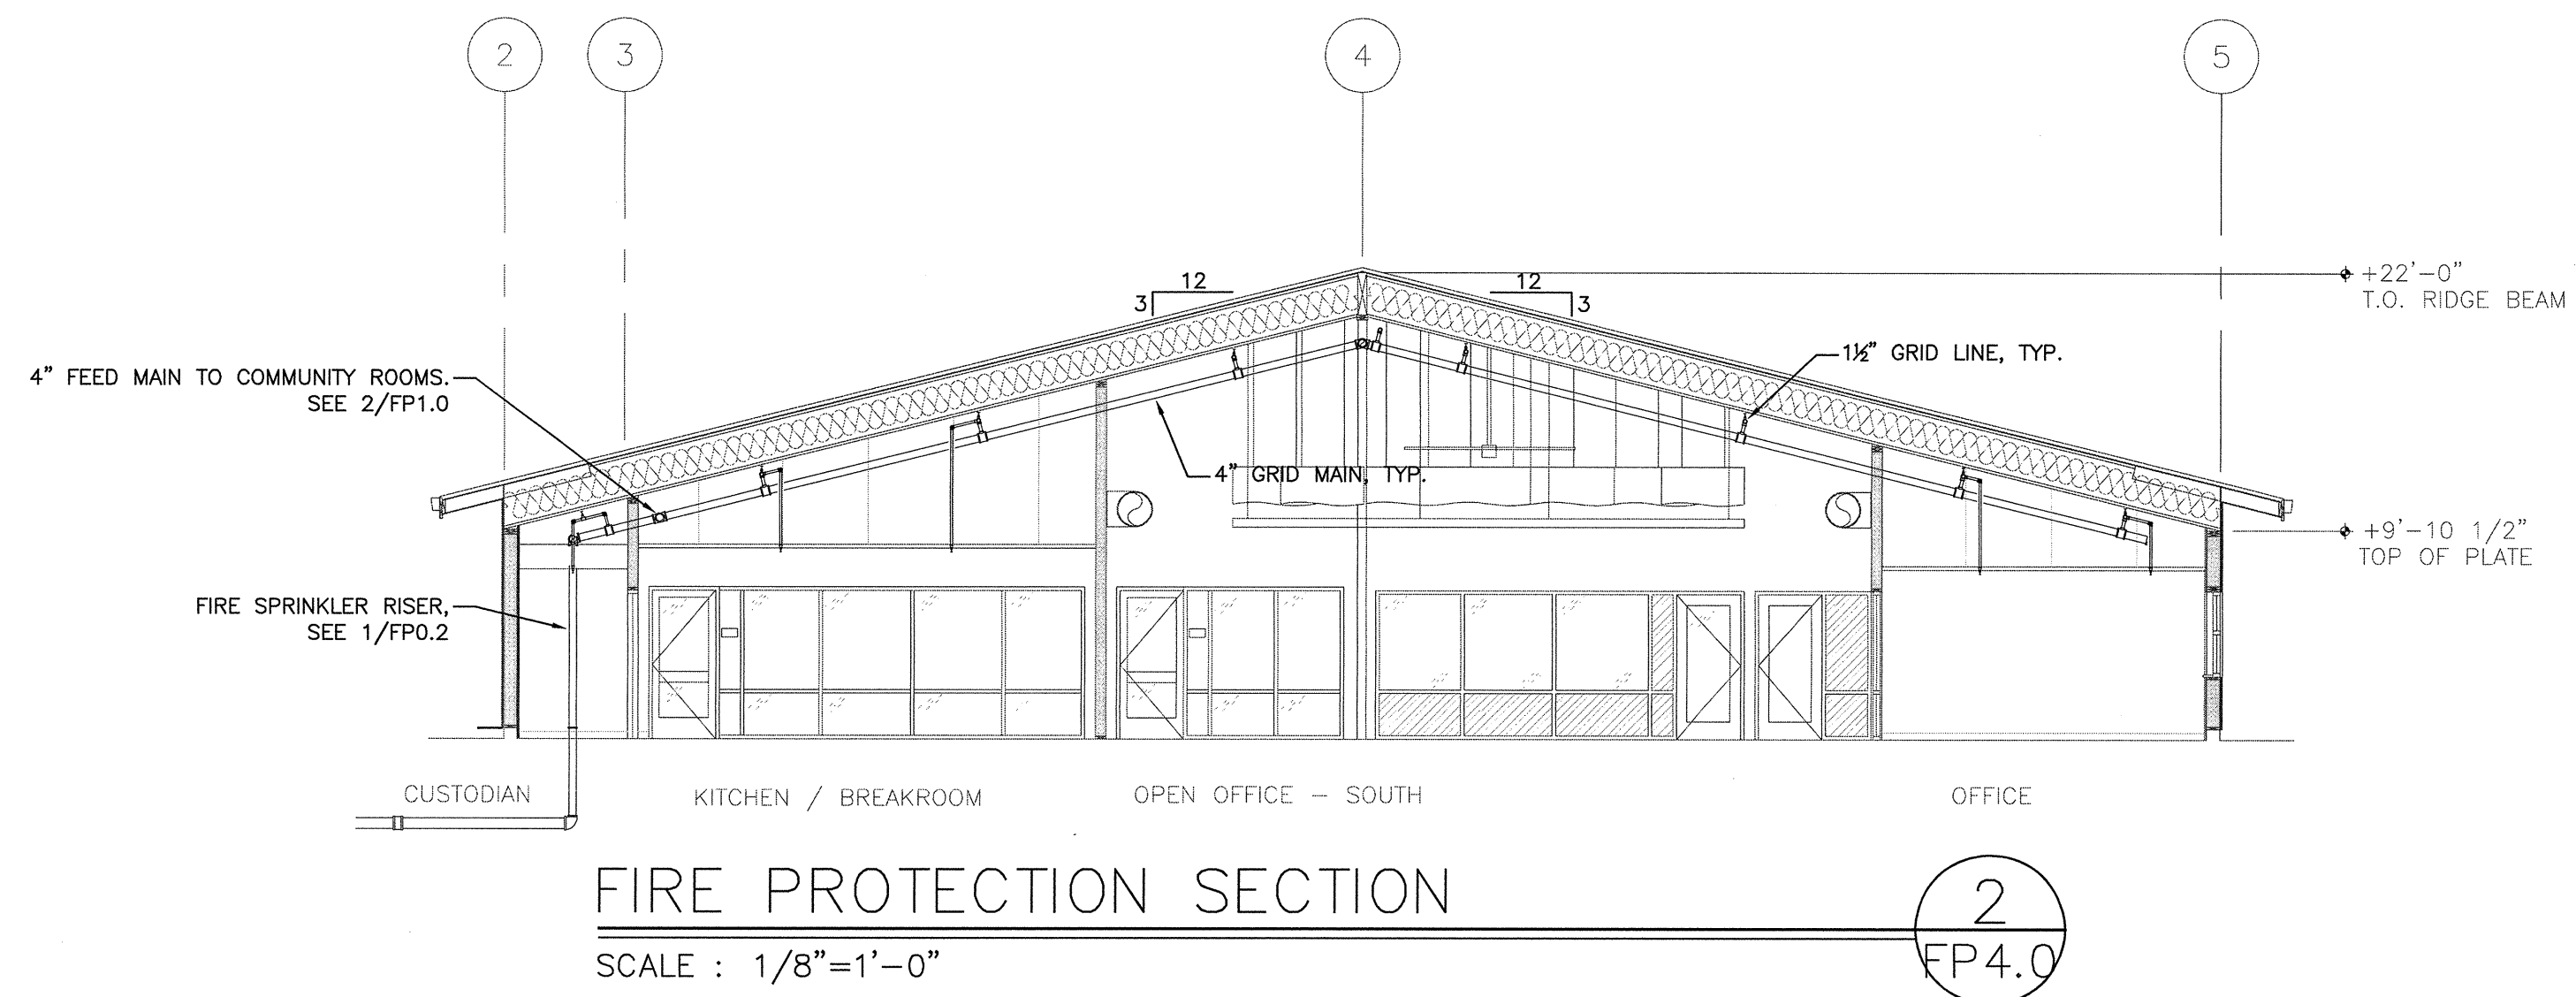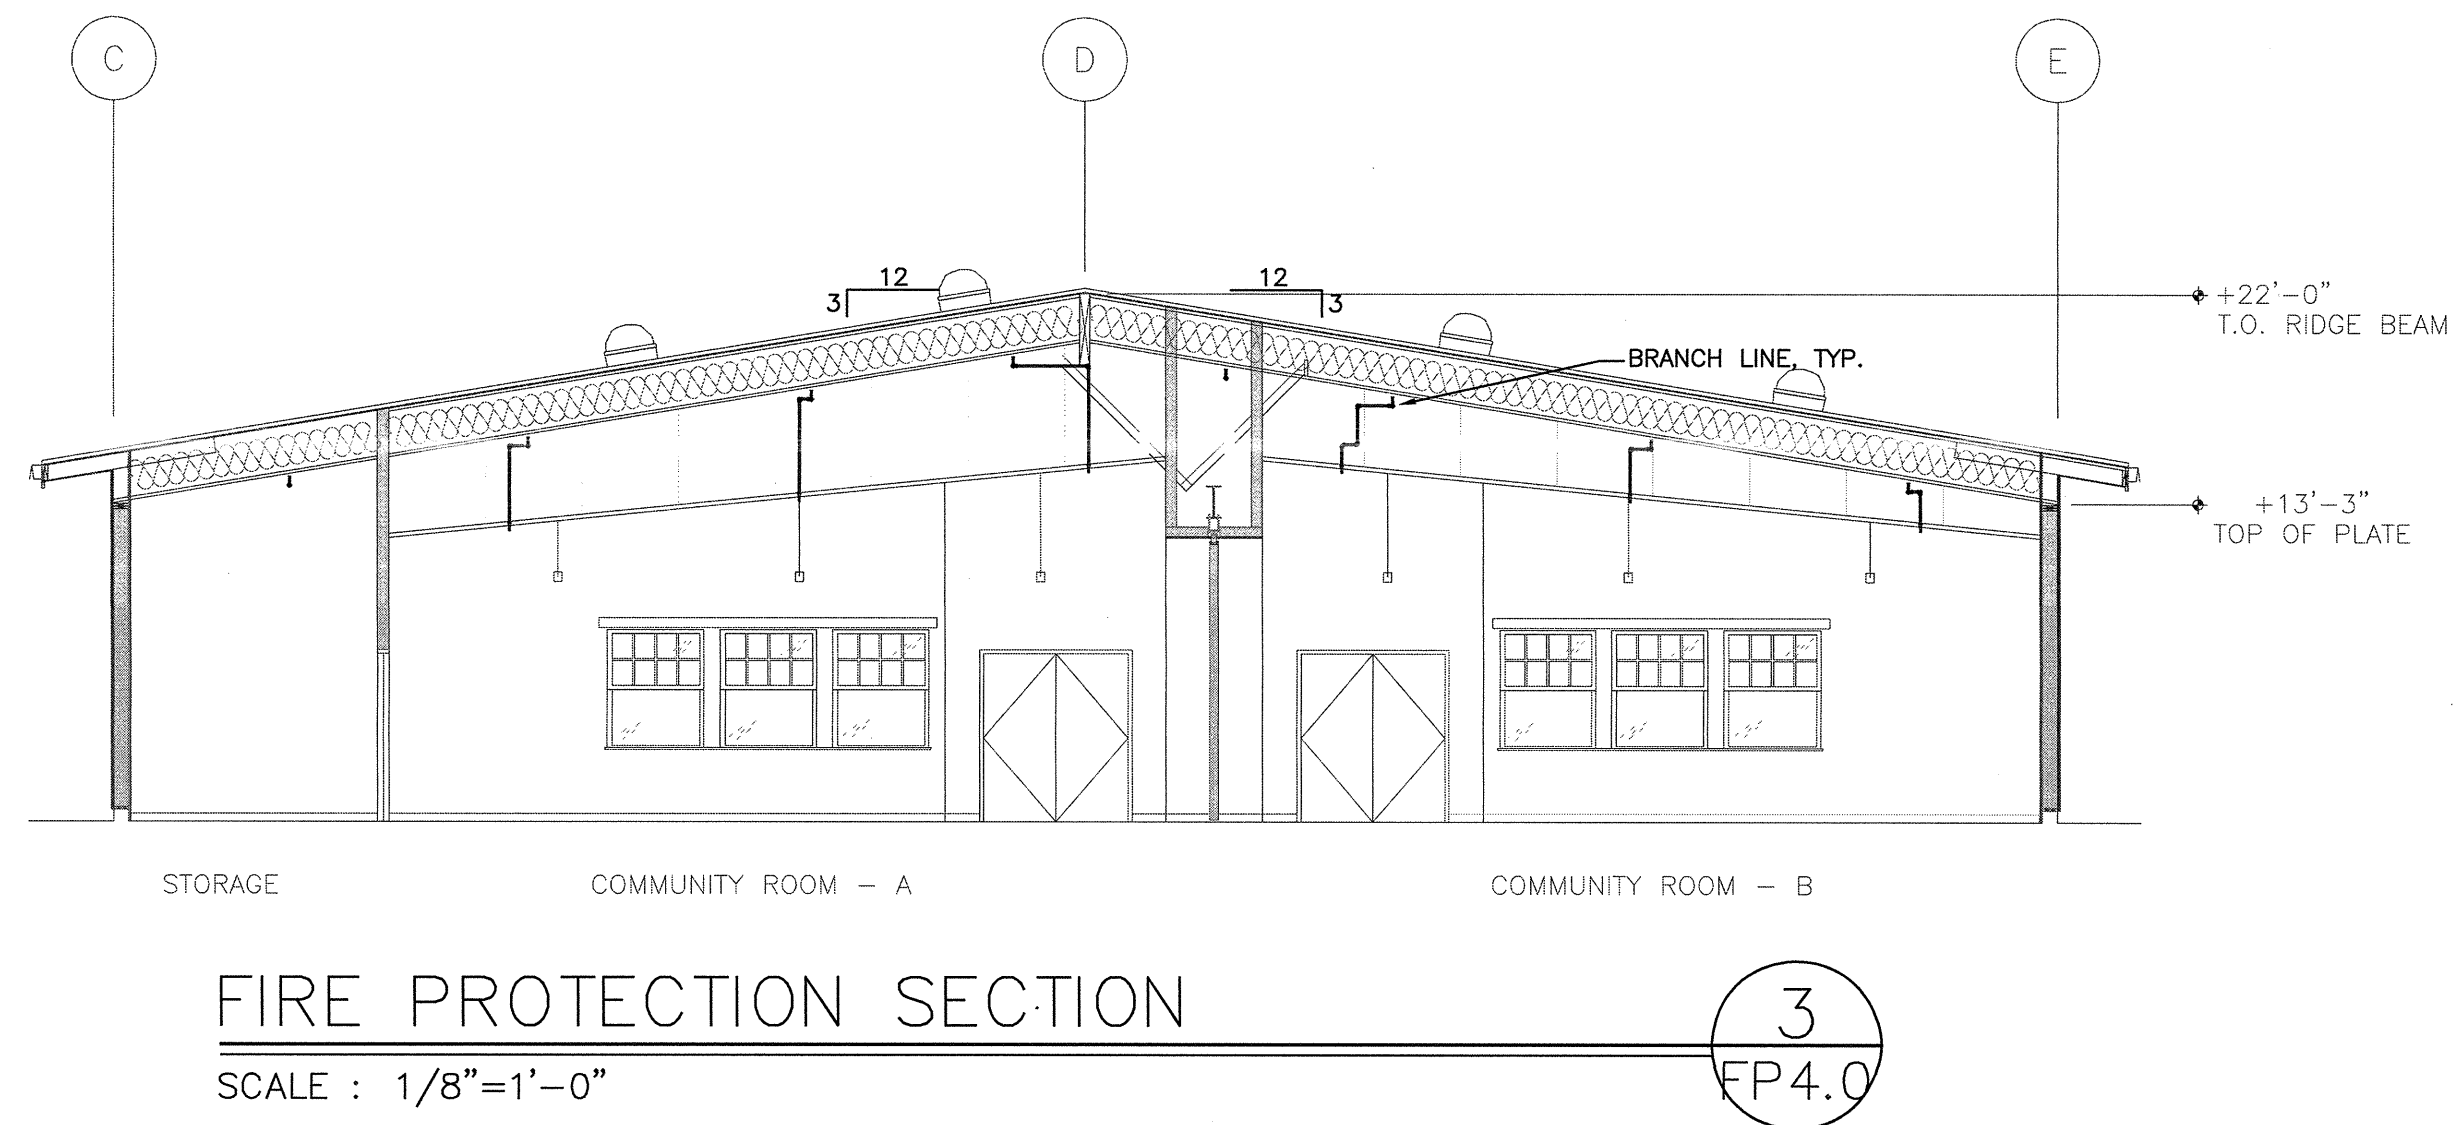

FILE NO. 31-15  
IDENTIFICATION STAMP DIV. OF THE  
STATE ARCHITECT OFFICE OF  
REGULATION SERVICES  
APPLICATION NO.  
02-115496  
AC TM FLS HPS SS BZ  
DATE 2/23/17 CCR

DIVISION OF THE STATE ARCHITECT  
revision date: by:

REGISTERED PROFESSIONAL ENGINEER  
THOMAS A. DAVIS  
No. 22843  
MECHANICAL  
STATE OF CALIFORNIA  
DATE SIGNED: 2/15/2017

CAPITAL ENGINEERING  
CONSULTANTS, INC.  
RANCHO CORDOVA, CALIFORNIA  
RL 160110.00  
PM - DESIGN TEAM PROJECT NO.

CONSULTANT

nacht&lewis  
600 Q Street, Suite 100  
Sacramento, CA 95811  
www.nachtandlewis.com  
916.329.4000

REGISTERED ARCHITECT  
BRIAN J. MATHIAS  
No. C-26667  
RENEWAL DATE:  
1/31/19  
STATE OF CALIFORNIA

ARCHITECT

| INITIAL BOX |        |      |          |
|-------------|--------|------|----------|
| NO.         | DWG BY | DATE | REVIEWED |
|             |        |      |          |
|             |        |      |          |

| REVISIONS |                            |          |       |
|-----------|----------------------------|----------|-------|
| NO.       | DESCRIPTION                | DATE     | REV'D |
|           | 100% design development    | 7/8/16   |       |
|           | 75% construction documents | 9/29/16  |       |
|           | DSA submittal              | 12/31/16 |       |
|           | DSA approval               | 02/23/17 |       |


DATE February 23, 2017  
JOB NO. Y1538.00  
SHEET TITLE

Fire Protection  
Sections

SHEET NO.  
FP4.0  
SHEET \_\_\_\_ OF \_\_\_\_ TOTAL



ONE INCH = TWENTY FEET  
ONE-SIXTEENTH INCH = ONE FOOT  
ONE-EIGHTH INCH = ONE FOOT  
ONE-FOURTH INCH = ONE FOOT  
ONE-HALF INCH = ONE FOOT  
THREE-QUARTERS INCH = ONE FOOT  
ONE INCH = ONE FOOT  
ONE AND ONE-HALF INCH = ONE FOOT

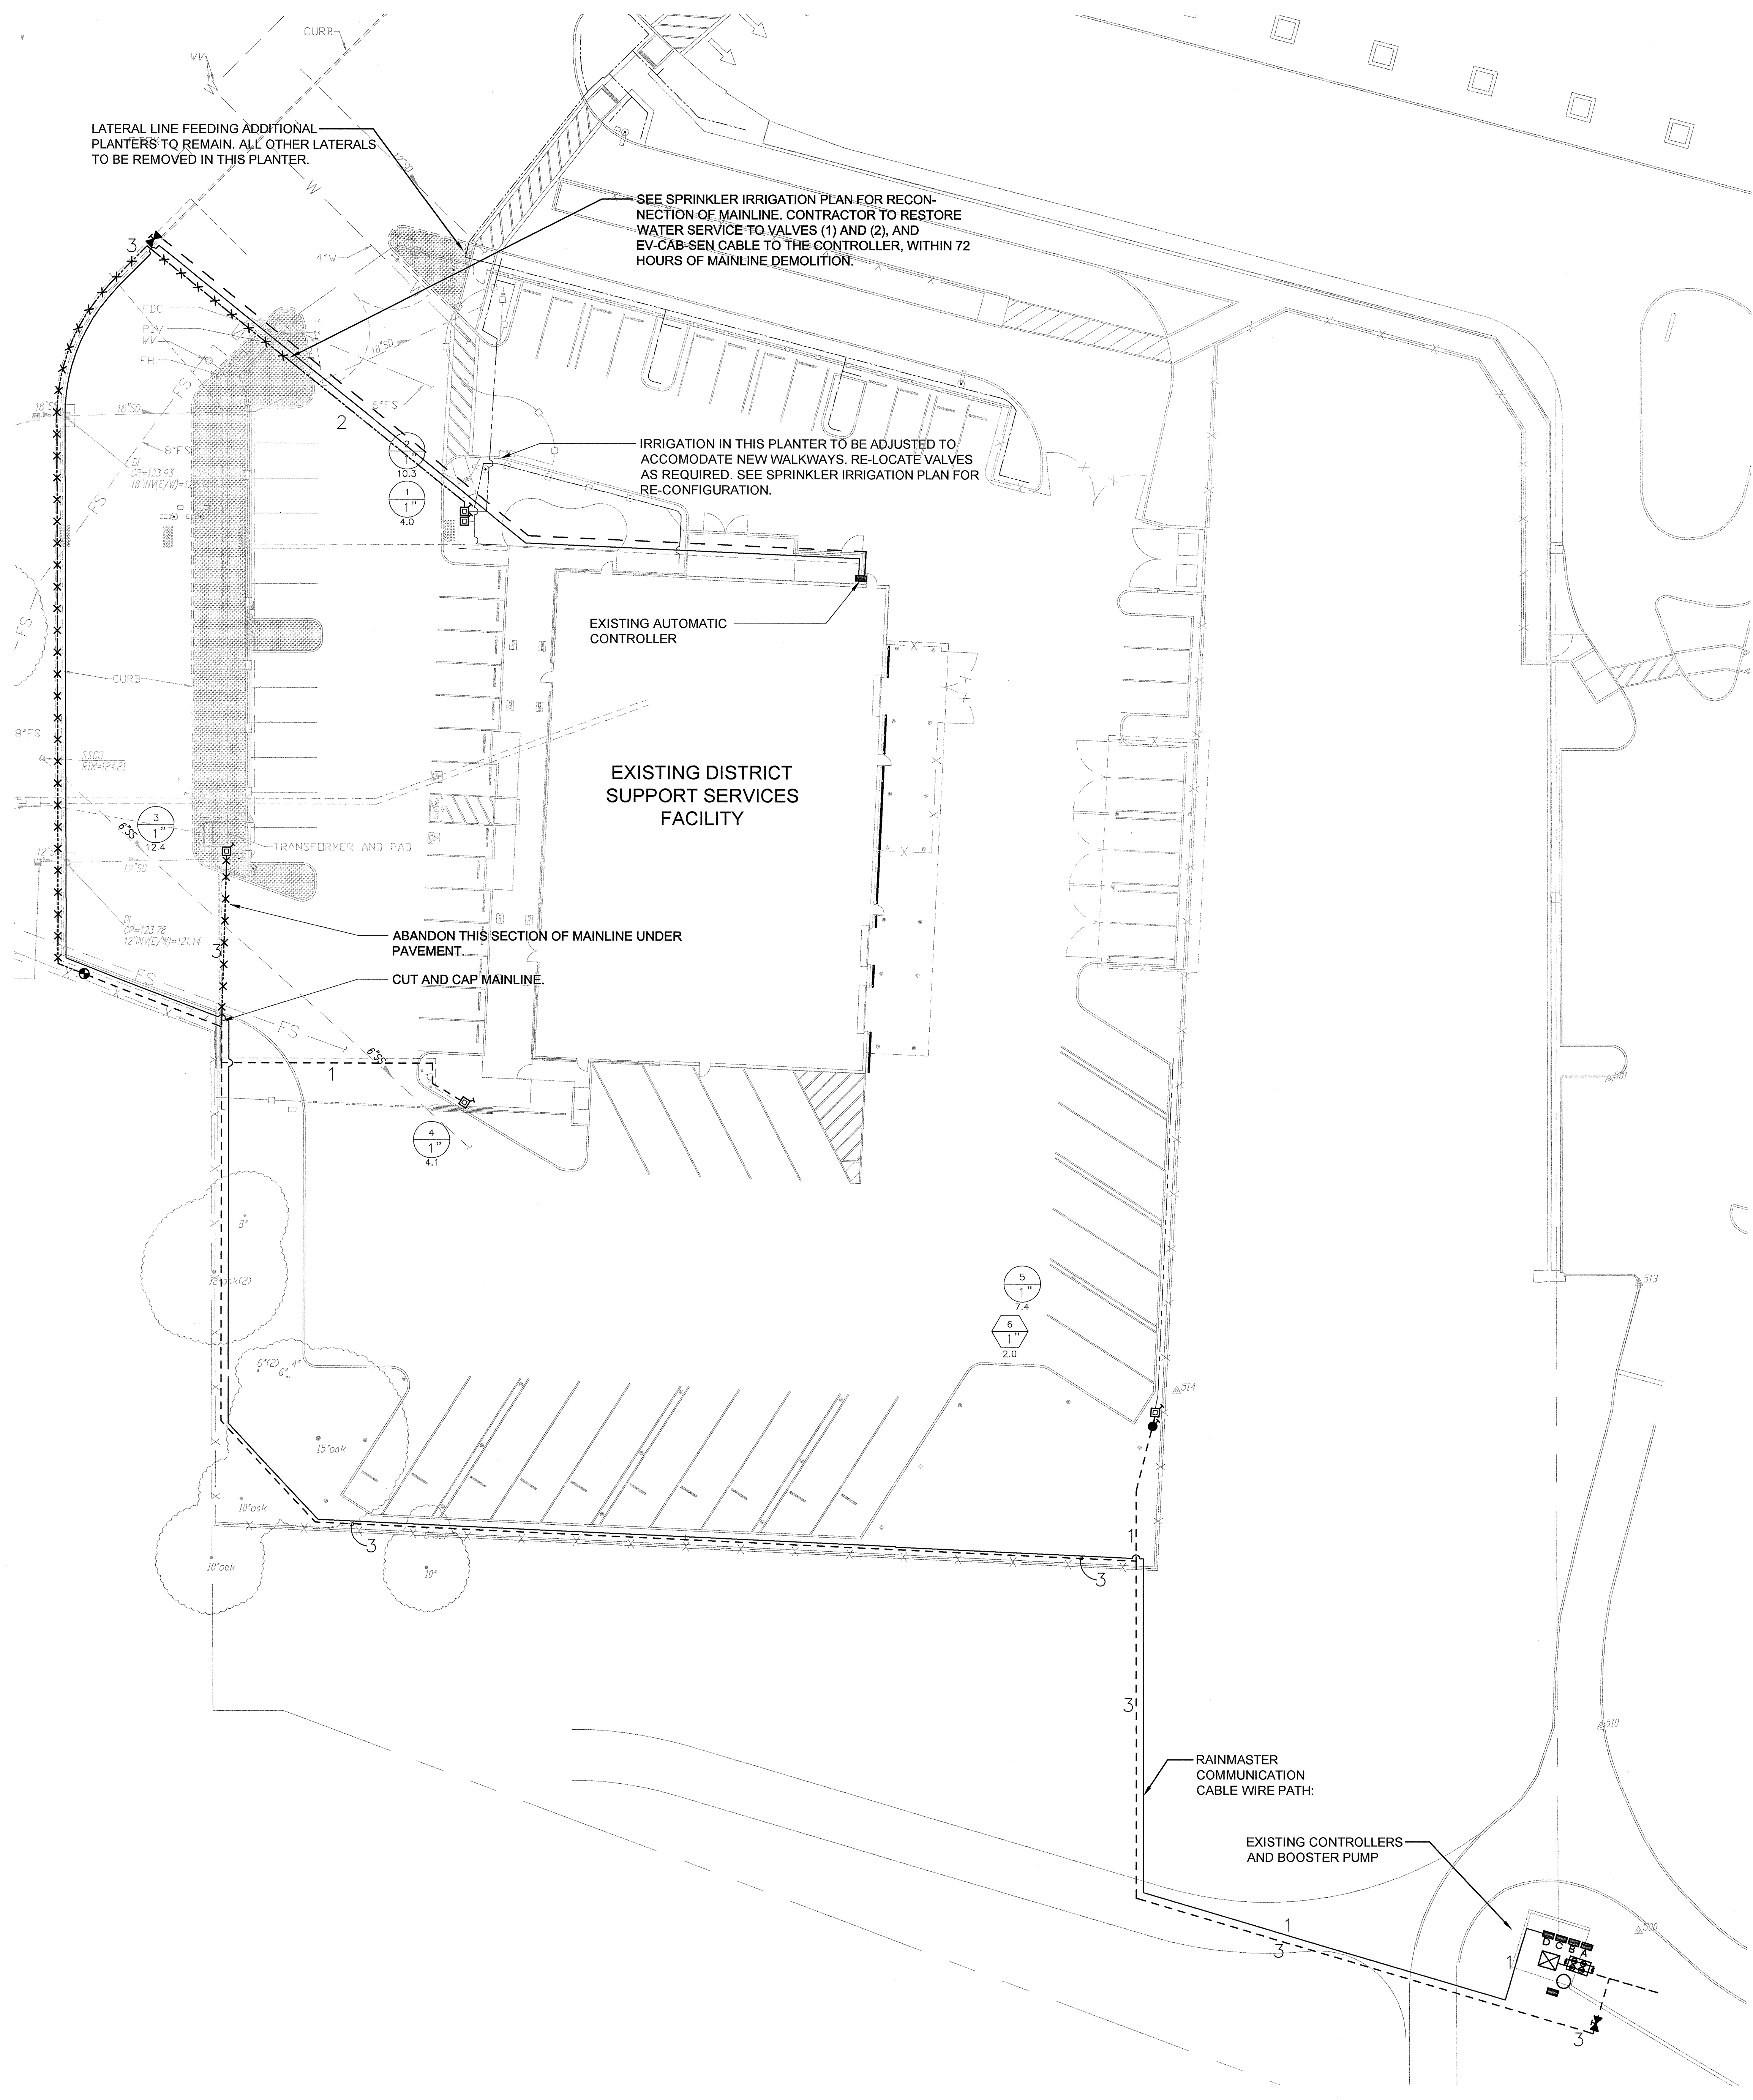

KEY

LANDSCAPE AND IRRIGATION DEMOLITION LEGEND

EXISTING AUTOMATIC CONTROLLER:  
FOR REFERENCE ONLY.  
RAINMASTER CENTRAL CONTROL SYSTEM: DX18 - 18 STATION CONTROLLER

RAINMASTER COMMUNICATION CABLE WIRE PATH:  
RAINMASTER EV-CAB-COM IN 1" SCHEDULE 40 CONDUIT.

CONTROL WIRE IN CONDUIT:  
(6) SPARE CONTROL WIRES IN CONDUIT.

EXISTING IRRIGATION SUPPLY LINE TO REMAIN:

EXISTING PRESSURE MAIN LINE TO REMOVE:  
REMOVE CONTROLS WIRES WITH MAINLINE, LOCATION APPROX. VERIFY ON SITE

EXISTING LATERAL LINE

AUTOMATIC CONTROL VALVE:  
FOR REFERENCE ONLY. LOCATION APPROXIMATE.

AUTOMATIC DRIP IRRIGATION VALVE:  
FOR REFERENCE ONLY. LOCATION APPROXIMATE.


EXISTING SUBSURFACE INLINE DRIP SYSTEM TO REMAIN:  
PVC SCHEDULE 40 LATERAL LINES SHOWN, NETAFIM TECHLINE CV NOT SHOWN.

EXISTING LANDSCAPE AND IRRIGATION TO BE REMOVED:  
REMOVE ALL EXISTING LANDSCAPE AND SUBSURFACE DRIP IRRIGATION, LATERALS, VALVES, AND ALL RELATED EQUIPMENT.

INDICATES EXISTING CONTROL VALVE AND STATION NUMBER

INDICATES EXISTING CONTROL VALVE SIZE

INDICATES EXISTING GALLONS PER MINUTE

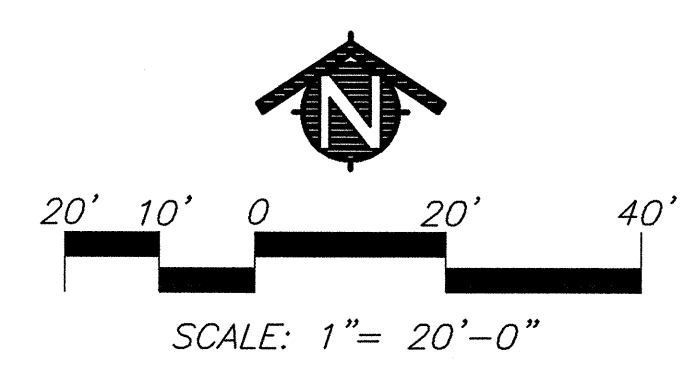

Dry Creek Joint Elementary School District  
District Education Center

8849 Cook Riolo Road, Roseville, CA 95747

Dry Creek Joint Elementary School District

FILE NO. 31-15

IDENTIFICATION STAMP DIV. OF THE  
STATE ARCHITECT OFFICE OF  
REGULATION SERVICES

APPLICATION NO.  
02-115456

DATE 7/23/17

DIVISION OF THE STATE ARCHITECT

revision date: by:

16-30

MTW group

CONSULTANT

nacht & lewis

600 Q Street, Suite 100  
Sacramento, CA 95811  
www.nachtlewis.com  
916.329.4000

ARCHITECT

INITIAL BOX

| NO. | DWG BY | DATE | REVIEWED |
|-----|--------|------|----------|
|     |        |      |          |
|     |        |      |          |
|     |        |      |          |

REVISIONS

| NO. | DESCRIPTION | DATE | REV'D |
|-----|-------------|------|-------|
|     |             |      |       |
|     |             |      |       |
|     |             |      |       |
|     |             |      |       |
|     |             |      |       |

DATE February 23, 2017

JOB NO. Y1538.00

SHEET TITLE

Landscape And  
Irrigation  
Demolition  
Plan


SHEET NO.

L0.1

SHEET 1 OF 7 TOTAL



ONE AND ONE-HALF INCH = ONE FOOT  
ONE INCH = ONE FOOT  
THREE-QUARTERS INCH = ONE FOOT  
ONE-HALF INCH = ONE FOOT  
ONE-QUARTER INCH = ONE FOOT  
ONE-EIGHTH INCH = ONE FOOT  
ONE-SIXTEENTH INCH = ONE FOOT  
ONE INCH = TWENTY FEET

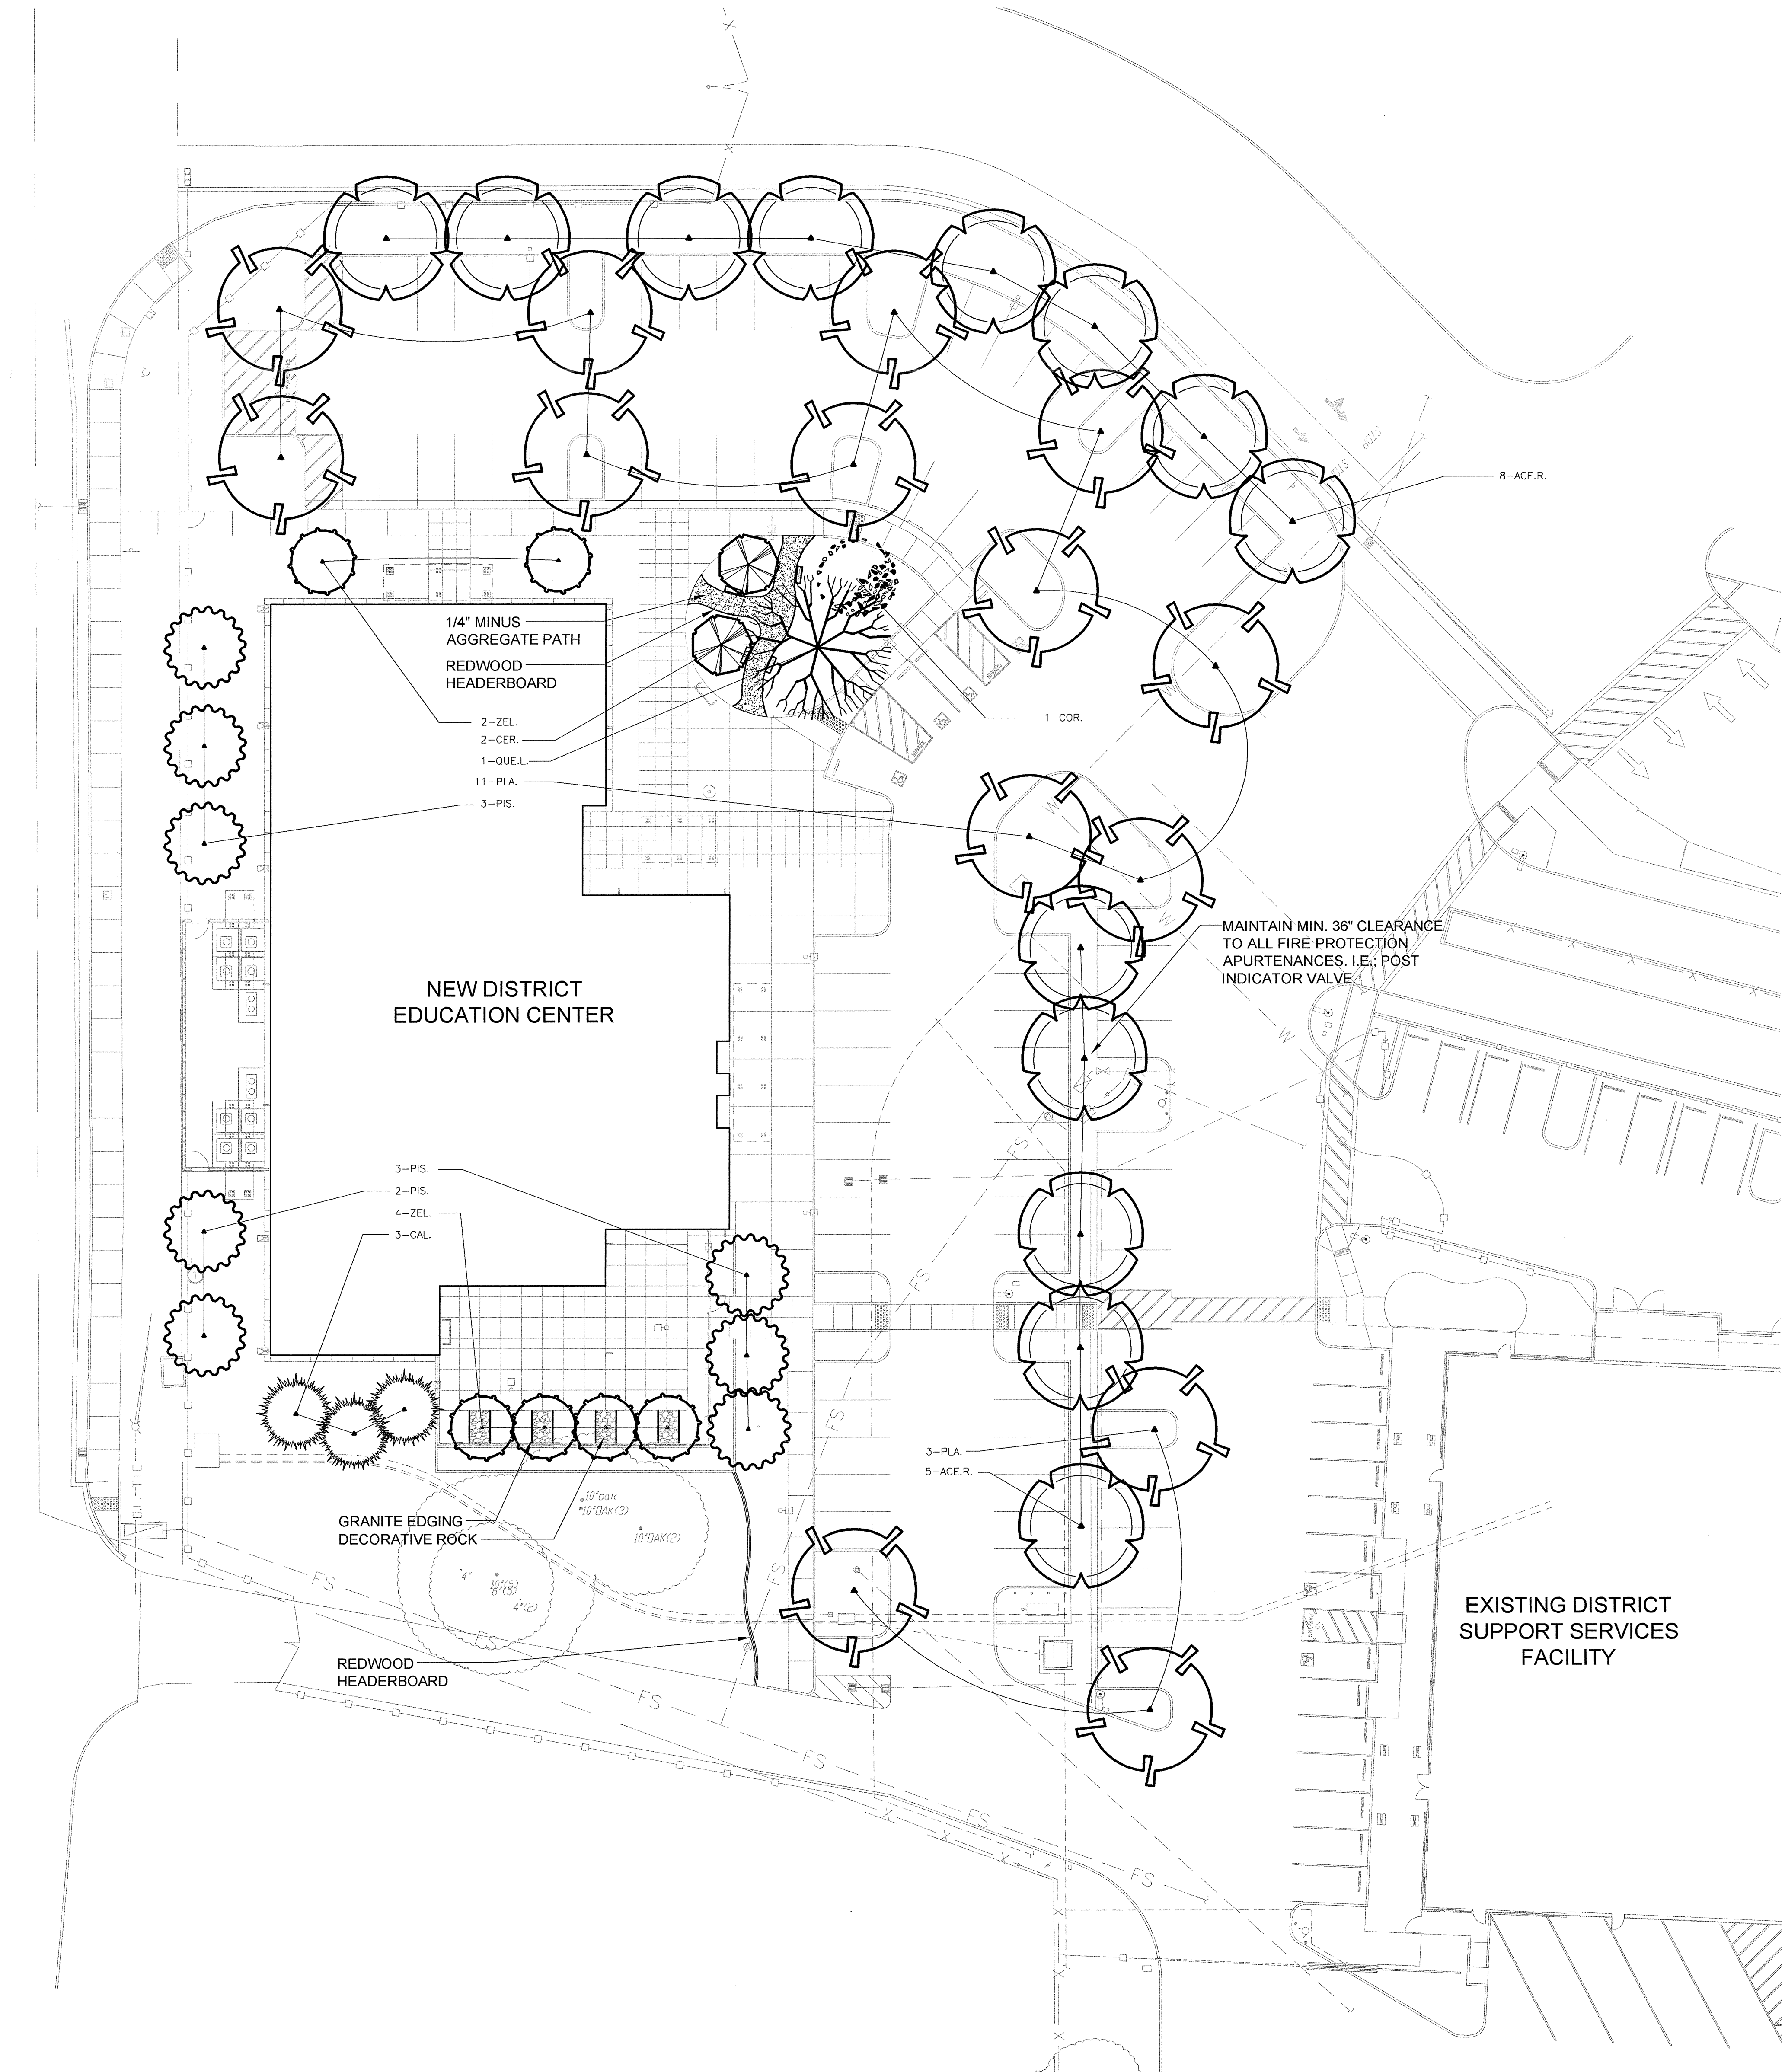

| KEY | LANDSCAPE LEGEND                                         |
|-----|----------------------------------------------------------|
|     | TREES - NOT ALL SYMBOLS SHOWN                            |
|     | GRANITE EDGING. DETAIL 6, L4.1                           |
|     | 2\"-3\" ROUND BLACK MEXICAN BEACH PEBBLE. DETAIL 6, L4.1 |
|     | 1/4\" MINUS AGGREGATE PATH.                              |
|     | REDWOOD HEADERBOARD                                      |

| PLANT MATERIAL LIST |          |        |                                                                 |
|---------------------|----------|--------|-----------------------------------------------------------------|
| SIZE                | QUANTITY | KEY    | BOTANICAL NAME ... COMMON NAME                                  |
| TREES:              |          |        |                                                                 |
| 15 G.C.             | 13       | ACE.R. | ACER RUBRUM "OCTOBER GLORY" ... RED MAPLE                       |
| 15 G.C.             | 3        | AL.    | ALCORNUS DECURRENS ... INCENSE CEDAR                            |
| 36\"/>              | 2        | CER.   | CERCIS CANADENSIS ... EASTERN REDBUD                            |
| 36\"/>              | 1        | COR.   | CORNUS KOUSA ... DOGWOOD                                        |
| 15 G.C.             | 8        | PIS.   | PISTACIA CHINENSIS "KEITH DAVEY" ... FRUITLESS CHINESE PISTACHE |
| 15 G.C.             | 14       | PLA.   | PLATANUS ACERIFOLIA "COLUMBIA" ... LONDON PLANE TREE            |
| 48\"/>              | 1        | QUE.L. | QUERCUS LOBATA ... VALLEY OAK                                   |
| 15 G.C.             | 6        | ZEL.   | ZELKOVA MUSASHINO ... COLUMNER ZELKOVA                          |

GENERAL LANDSCAPE REQUIREMENTS/NOTES

- NO PLANTING SHALL BE STARTED UNTIL SPRINKLER IRRIGATION SYSTEM HAS BEEN TESTED BY CONTRACTOR IN PRESENCE OF OWNER'S REPRESENTATIVE AND NOTED DEFICIENCIES CORRECTED.
- NO PLANTING SHALL BE STARTED UNTIL SOIL PREPARATION AND FINISH GRADING OPERATIONS HAVE BEEN COMPLETED AND APPROVED BY THE OWNER'S REPRESENTATIVE.
- QUANTITIES SHOWN ON PLANT MATERIAL LIST ARE APPROXIMATE. PROVIDE QUANTITIES INDICATED ON LANDSCAPE PLAN.
- PLANT MATERIAL IS SUBJECT TO APPROVAL OF OWNER'S REPRESENTATIVE.
- SEE SHEET L4.1 FOR PLANTING INSTALLATION DETAILS.

ENVIRONMENTAL REQUIREMENTS:

GENERAL: PROCEED WITH WORK IN ORDERLY AND TIMELY MANNER TO COMPLETE INSTALLATION OF LANDSCAPING WITHIN CONTRACT LIMITS.

PROTECTION:

EXISTING CONSTRUCTION: EXECUTE WORK IN AN ORDERLY AND CAREFUL MANNER TO PROTECT NEW CONCRETE WALKS, WORK OF OTHER TRADES, AND OTHER IMPROVEMENTS.

EXISTING UTILITIES: DETERMINE LOCATION OF UNDERGROUND UTILITIES AND PERFORM WORK IN A MANNER WHICH WILL AVOID POSSIBLE DAMAGE. HAND EXCAVATE, AS REQUIRED, TO MINIMIZE POSSIBILITY OF DAMAGE TO UNDERGROUND UTILITIES. MAINTAIN GRADE STAKES SET BY OTHERS UNTIL REMOVAL IS MUTUALLY AGREED UPON BY ALL PARTIES CONCERNED. BE RESPONSIBLE FOR PROTECTION OF EXISTING UTILITIES WITHIN CONSTRUCTION AREA. REPAIR DAMAGE TO UTILITIES THAT OCCUR AS A RESULT OF OPERATIONS OF THIS WORK.

LANDSCAPING: PROTECT LANDSCAPE WORK AND MATERIALS FROM DAMAGE DUE TO LANDSCAPE OPERATIONS, OPERATIONS BY OTHER CONTRACTORS AND TRADES AND TRESPASSERS. MAINTAIN PROTECTION DURING INSTALLATION AND MAINTENANCE PERIODS. TREAT, REPAIR OR REPLACE DAMAGED LANDSCAPE WORK AS DIRECTED AT NO ADDITIONAL COST TO CONTRACT.

ADVERSE CONDITIONS: WHEN CONDITIONS DETRIMENTAL TO SOIL OR PLANT GROWTH ARE ENCOUNTERED, SUCH AS RUBBLE FILL, ADVERSE DRAINAGE CONDITIONS, OR OBSTRUCTIONS, NOTIFY OWNER'S REPRESENTATIVE BEFORE STARTING WORK.

PLANTING AND TURF INSTALLATION SEASONS AND CONDITIONS

NO WORK SHALL BE DONE WHEN GROUND IS FROZEN, SNOW COVERED, TOO WET OR IN AN OTHERWISE UNSUITABLE CONDITION FOR AMENDING SOIL, FINISH GRADING OR PLANTING.

SOIL TESTING/SOIL IMPROVEMENT:

SEE SPECIFICATIONS 32 90 00, SECTION 3.02 SOIL TESTING AND SECTION 3.03 PREPARATION.

SOIL PERCOLATION


EXCAVATE 10 PLANTING PITS IN RANDOM AREAS OF SITE. FILL EXCAVATED PLANTING PITS WITH WATER TO 1/2 DEPTH OF PIT. PITS SHOULD DRAIN WITHIN 4 HOURS. IF PLANTING PITS DO NOT DRAIN, NOTIFY INSPECTOR IMMEDIATELY. PLANTING SHALL NOT BE STARTED UNTIL OWNER'S REPRESENTATIVE HAS RESOLVED A METHOD TO REMEDY DRAINAGE ISSUE.

PLANT MATERIAL STANDARDS

PLANTS SHALL BE IN ACCORDANCE WITH AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI) ANSI Z60.1 - AMERICAN STANDARD FOR NURSERY STOCK, EXCEPT AS OTHERWISE STATED IN SPECIFICATIONS OR SHOWN ON DRAWINGS. WHERE DRAWINGS OR SPECIFICATIONS ARE IN CONFLICT WITH ANSI Z60.1, DRAWINGS AND SPECIFICATIONS SHALL PREVAIL. PRUNE, THIN OUT AND SHAPE TREES IN ACCORDANCE WITH ANSI STANDARD HORTICULTURAL PRACTICE. PRUNE TREES TO RETAIN REQUIRED HEIGHT AND SPREAD. UNLESS OTHERWISE DIRECTED BY LANDSCAPE ARCHITECT, DO NOT CUT TREE LEADERS, AND REMOVE ONLY INJURED OR DEAD BRANCHES FROM FLOWERING TREES.

EXISTING LANDSCAPE AND SPRINKLER IRRIGATION SYSTEM

WORK LIMITS OF THIS PROJECT EXTEND INTO AREAS THAT WERE PREVIOUSLY DEVELOPED UNDER OTHER CONTRACTS. PRIOR TO START OF WORK, CONTRACTOR SHALL MEET WITH OWNER'S REPRESENTATIVE TO LOCATE ALL CONNECTIONS CALLED FOR ON DRAWINGS. WORK LIMITS/FENCING SHALL BE LAID OUT BY CONTRACTOR AND VERIFIED BY OWNER'S REPRESENTATIVE. FENCE TO BE INSTALLED AND IRRIGATION SYSTEM SHALL BE TESTED WITH CONTRACTOR, INSPECTOR, AND OWNER'S REPRESENTATIVE PRESENT. DEFICIENCIES SHALL BE NOTED AT THIS TIME AND ARE THE RESPONSIBILITY OF OWNER. AT COMPLETION OF WORK, SYSTEM WILL AGAIN BE TESTED. DEFICIENCIES NOTED AT THIS TIME THAT WERE NOT NOTED PREVIOUSLY WILL BE RESPONSIBILITY OF CONTRACTOR. EXISTING LANDSCAPE THAT HAS BEEN DAMAGED DUE TO CONSTRUCTION SHALL BE RESTORED TO ORIGINAL CONDITION BY CONTRACTOR AT NO ADDITIONAL COST TO OWNER. PRIOR TO MAKING ANY CONNECTION TO MAIN LINE, CONTRACTOR SHALL NOTIFY OWNER 1 WEEK IN ADVANCE SO ADJUSTMENTS TO EXISTING WATERING PROGRAMS CAN BE MADE.

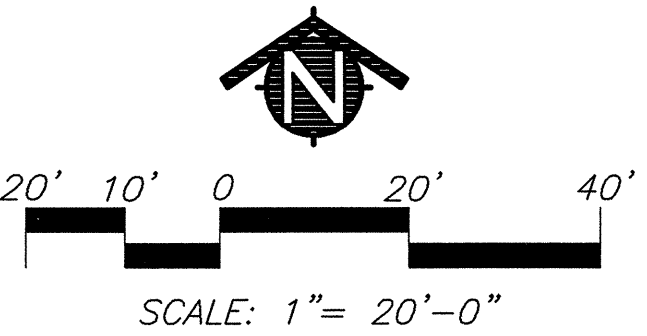

Dry Creek Joint Elementary School District  
District Education Center

8849 Cook Riolo Road, Roseville, CA 95747  
Dry Creek Joint Elementary School District

FILE NO. 31-15  
IDENTIFICATION STAMP DIV. OF THE  
STATE ARCHITECT OFFICE OF  
REGULATION SERVICES  
APPLICATION NO.  
02-115456  
AC: MTW FLS: FLS SS: FLS  
DATE: 2/23/17

DIVISION OF THE STATE ARCHITECT  
revision date: \_\_\_\_\_ by: \_\_\_\_\_

16-30  
  
MTW group  
5453  
1/23/17  
STATE OF CALIFORNIA  
CONSULTANT

nacht & lewis  
600 Q Street, Suite 100  
Sacramento, CA 95811  
www.nachtandlewis.com  
916.829.4000  
No. C-20897  
RENEWAL DATE:  
1/31/19  
ARCHITECT

| INITIAL BOX |        |      |          |
|-------------|--------|------|----------|
| NO.         | DWG BY | DATE | REVIEWED |
|             |        |      |          |
|             |        |      |          |
|             |        |      |          |

| REVISIONS |                            |          |     |
|-----------|----------------------------|----------|-----|
| NO.       | DESCRIPTION                | DATE     | REV |
|           | 100% design development    | 7/9/16   |     |
|           | 75% construction documents | 9/20/16  |     |
|           | DSA submittal              | 12/31/16 |     |
|           | DSA approval               | 02/23/17 |     |
|           |                            |          |     |
|           |                            |          |     |

DATE February 23, 2017  
JOB NO. Y1538.00  
SHEET TITLE

Tree  
Planting  
Plan

SHEET NO.  
L1.1  
SHEET 2 OF 7 TOTAL