

WIRING BY TEMPERATURE CONTROL CONTRACTOR (TCC)


WIRING BY ELECTRICAL CONTRACTOR (EC)

THESE CONTROL DIAGRAMS ARE DIAGRAMMATIC AND DO NOT DEPICT ALL CONTROL WIRES, RELAYS OR COMPONENTS OF A COMPLETE SYSTEM. IT IS THE RESPONSIBILITY OF THE TEMPERATURE CONTROLS CONTRACTOR TO PROVIDE A COMPLETE AND FUNCTIONAL CONTROL SYSTEM AT NO ADDITIONAL COST TO THE OWNER.

NOTE: ALL CONTROL WIRING SHALL BE RUN IN CONDUIT.



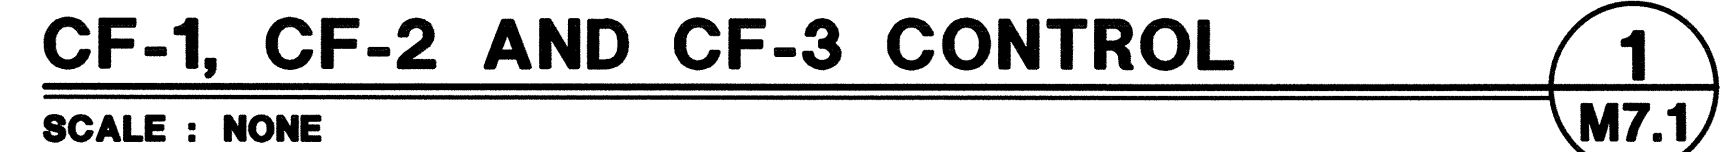RELIEF VENTILATOR INTERLOCK
RELIEF VENTILATOR SHALL BE INTERLOCKED WITH ECONOMIZER CONTROLLER THROUGH A 24VAC ENERGIZE SIGNAL. WHEN ECONOMIZER IS OPEN, RELIEF DAMPER MUST OPEN.



Dry Creek Joint Elementary School District

SHEET ____ OF ____ TOTAL


Dry Creek JESD

CITY MULTI
SYSTEM SCHEMATIC DWG.

DIAGRAM DISPLAY	SYMBOL DESCRIPTION	LEGEND
---	---	POWER WIRE
---	---	CONTROL WIRE
---	---	REF. PIPE

CONT.No	PAGE
---------	------

PIPING LIST		
SYMBOL	BRANCH PIPE	MODEL NAME
J1	Reducer	
SYMBOL LIQUID PIPE/GAS PIPE SIZE		
P1	1/4	/ 1/2
P2	3/8	/ 5/8
P3	3/4	/ 1-1/8
P4	5/8	/ 3/4

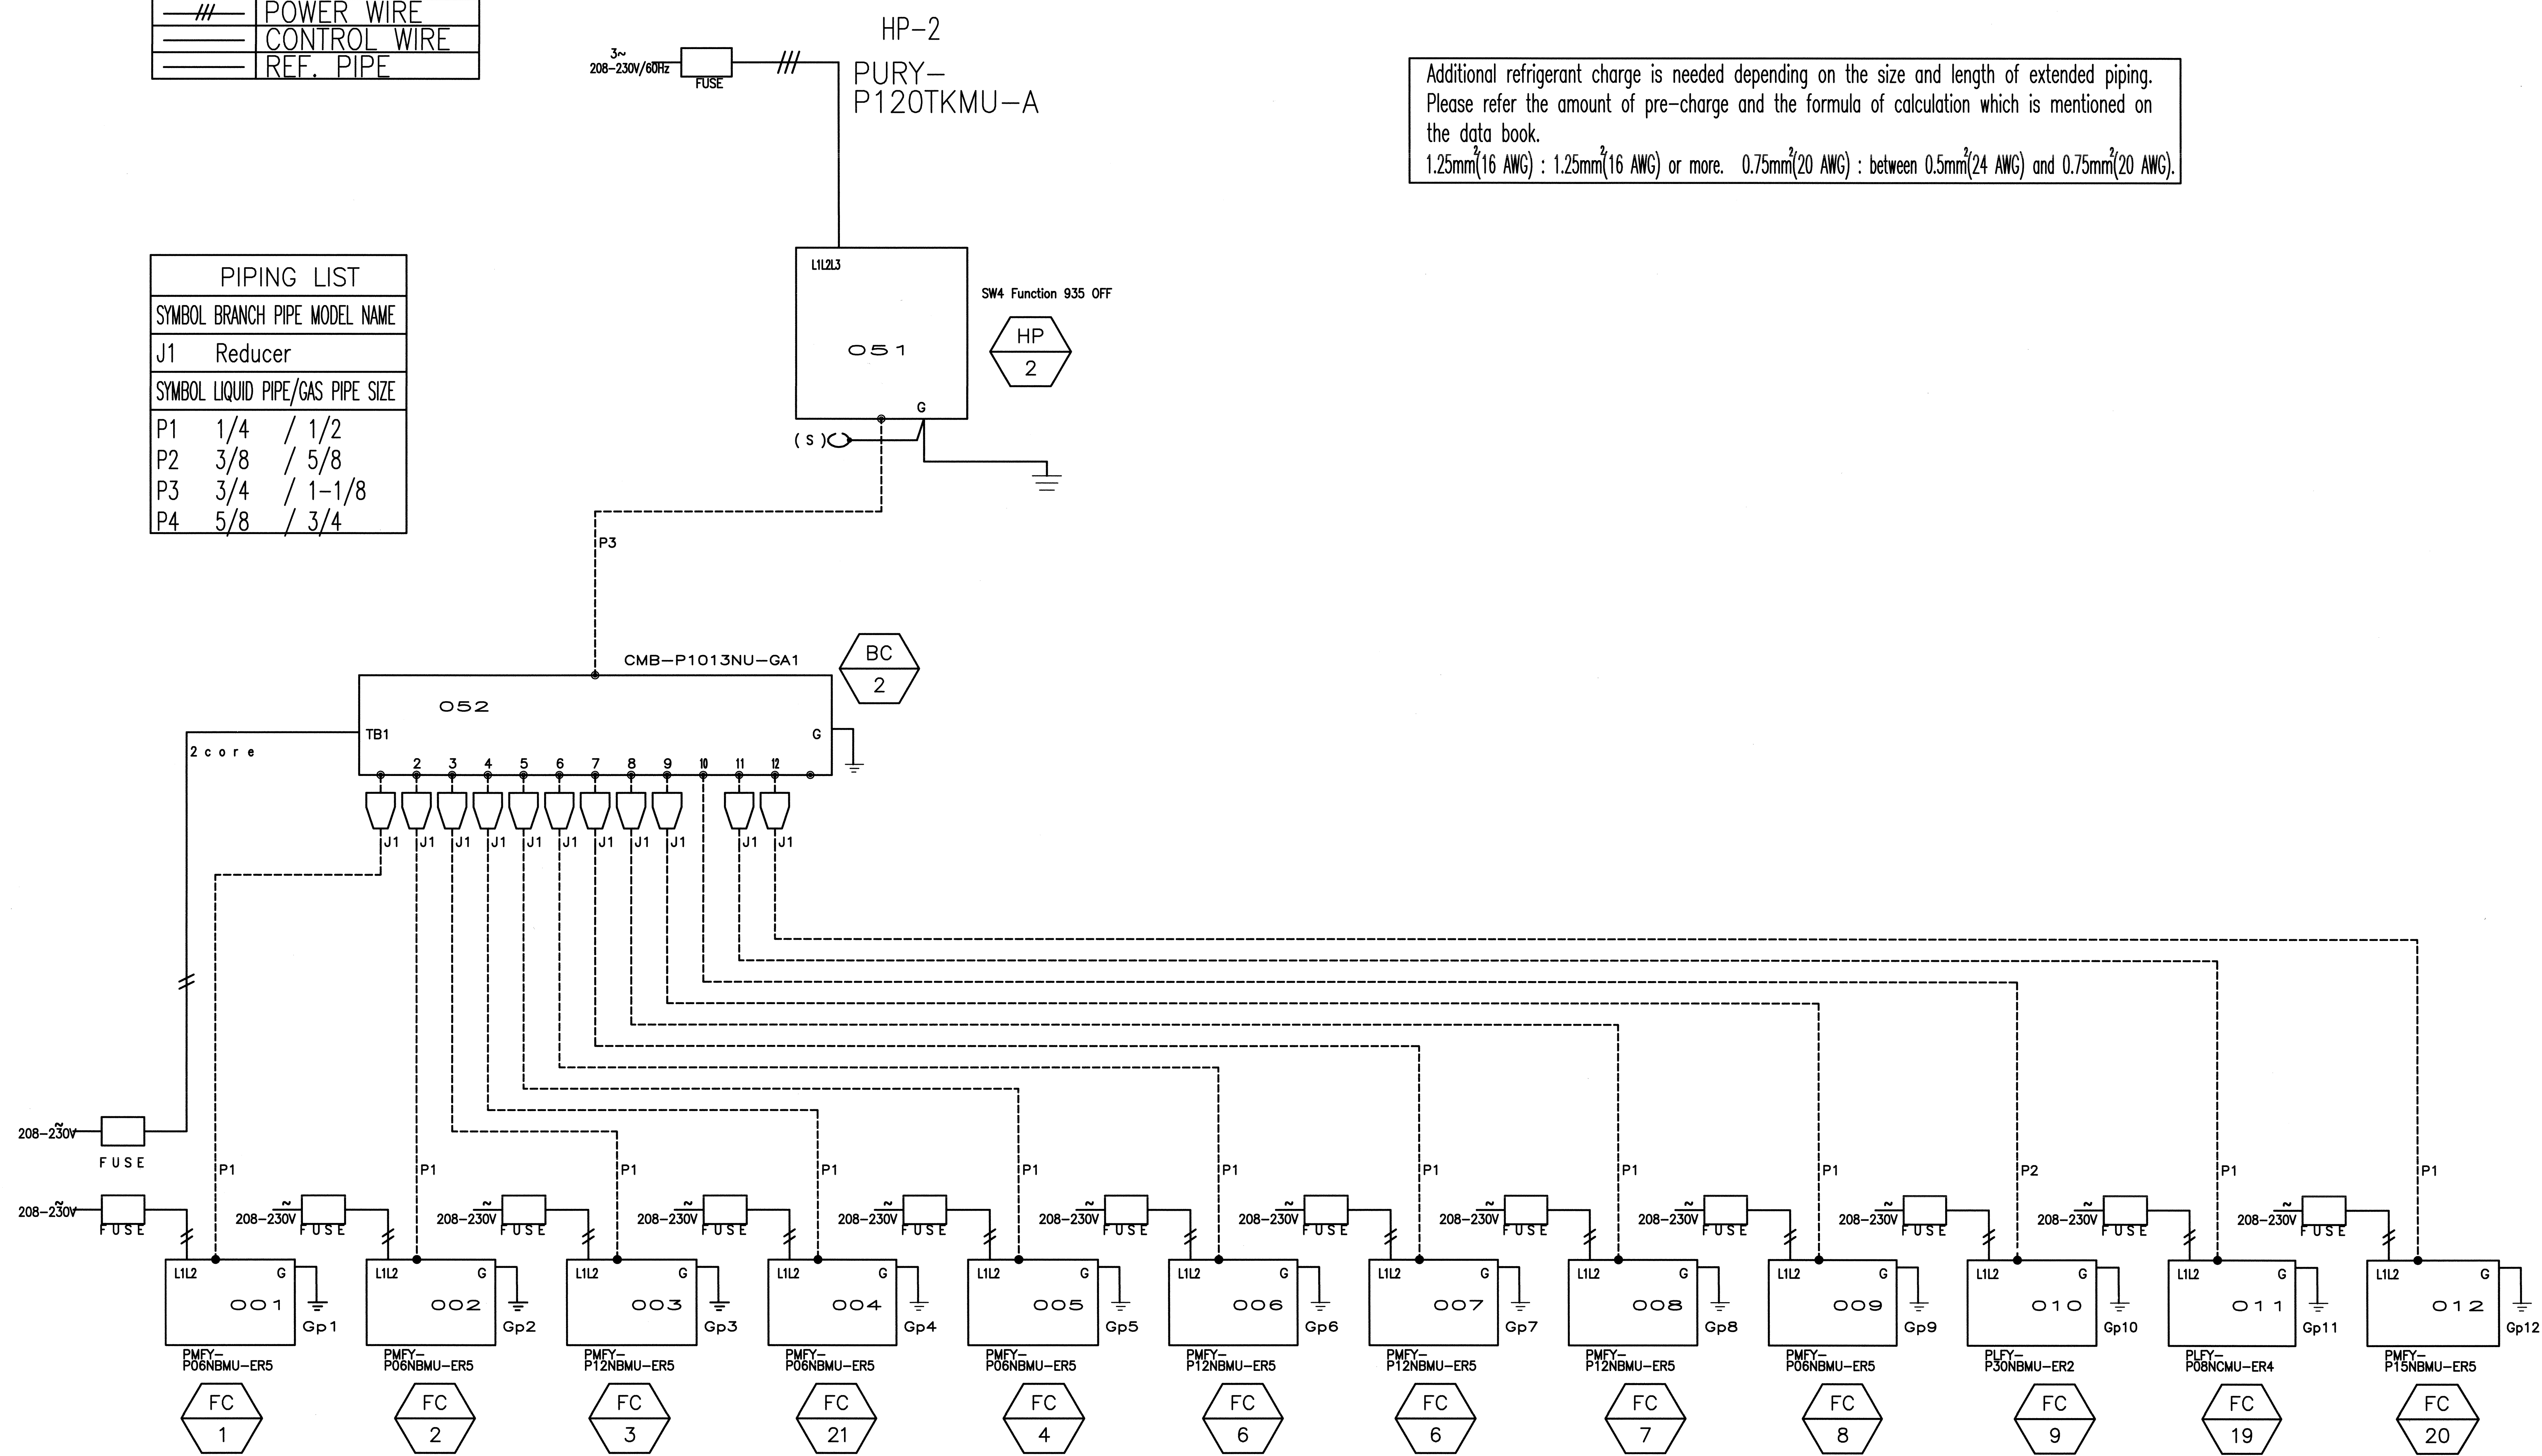

Additional refrigerant charge is needed depending on the size and length of extended piping.
Please refer the amount of pre-charge and the formula of calculation which is mentioned on the data book.
1.25mm²(16 AWG) : 1.25mm²(16 AWG) or more. 0.75mm²(20 AWG) : between 0.5mm²(24 AWG) and 0.75mm²(20 AWG).

MECHANICAL CONTROL/ PIPING DIAGRAM 1
SCALE : M7.2

REMARKS
Comments:

Dry Creek Joint Elementary School District
District Education Center
8849 Cook Riolo Road, Roseville, CA 95747
Dry Creek Joint Elementary School District

FILE NO. 31-15
IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-115496
AC TM FLSS SS ED
DATE 1/22/17 CEA

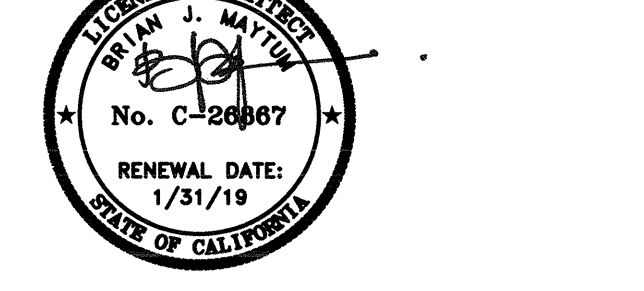
DIVISION OF THE STATE ARCHITECT
revision date: by:



CAPITAL ENGINEERING
CONSULTANTS, INC.
RANCHO CORDOVA, CALIFORNIA
FL 15010.00
PM - DESIGN TEAM PROJECT NO.

CONSULTANT

nacht&lewis
600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtandlewis.com
916.829.4000



ARCHITECT

INITIAL BOX			
NO.	DWG BY	DATE	REVIEWED

REVISIONS			
NO.	DESCRIPTION	DATE	REV'D
	100% design development	7/9/16	
	75% construction documents	9/20/16	
	DSA submittal	12/31/16	
	DSA approval	02/23/17	

DATE February 23, 2017
JOB NO. Y1538.00

SHEET TITLE

Mechanical
Control/ Piping
Diagram

SHEET NO.

M7.2

SHEET ____ OF ____ TOTAL


Dry Creek JESD

CITY MULTI
SYSTEM SCHEMATIC DWG.

DIAGRAM DISPLAY	SYMBOL DESCRIPTION	LEGEND
—#—	POWER WIRE	
—	CONTROL WIRE	
—	REF. PIPE	

CONT.No		PAGE	
---------	--	------	--

PIPING LIST		
SYMBOL	BRANCH PIPE	MODEL NAME
J1	Reducer	
SYMBOL	LIQUID PIPE/GAS PIPE	SIZE
P1	1/4	1/2
P2	3/8	5/8
P3	3/4	1-1/8
P4	5/8	3/4

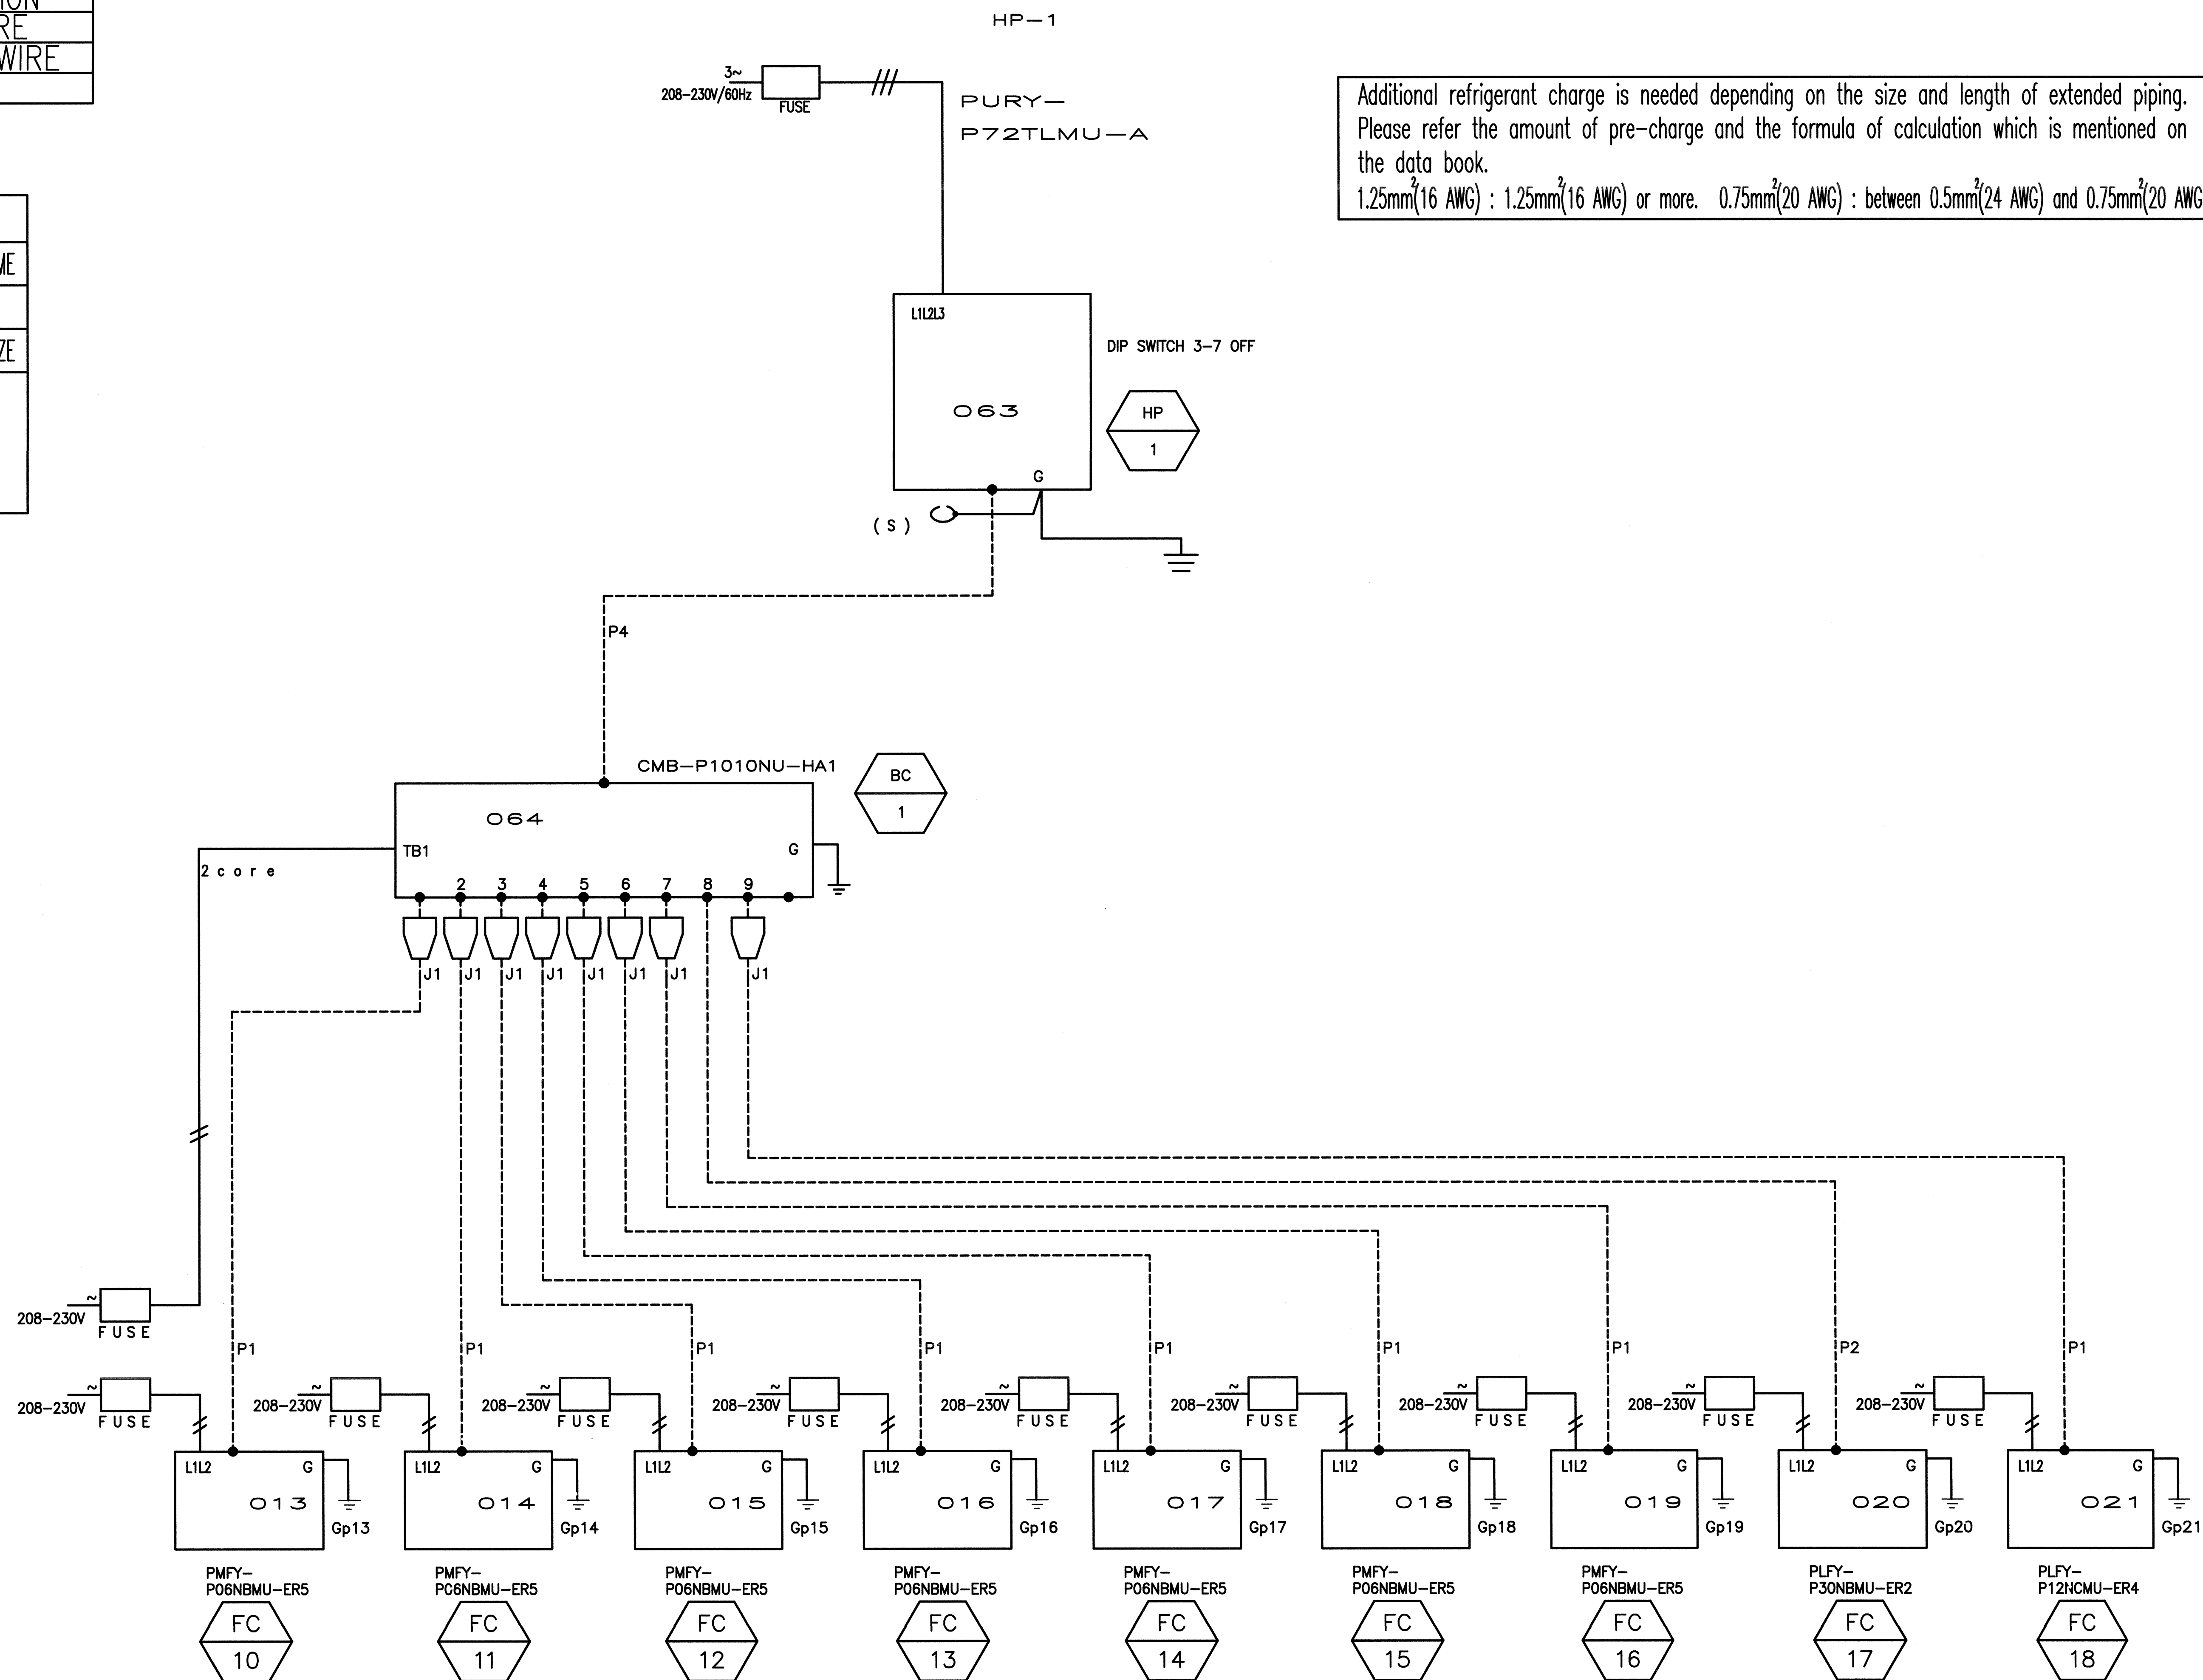

MECHANICAL CONTROL/ PIPING DIAGRAM 1
SCALE : NONE M7.3

Dry Creek Joint Elementary School District
District Education Center
8849 Cook Riolo Road, Roseville, CA 95747
Dry Creek Joint Elementary School District

FILE NO. 31-15
IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-115496
AC: TM FLS: HOS SS: BOD
DATE: 2/20/17 CEA

DIVISION OF THE STATE ARCHITECT
revision date: by:

REGISTERED PROFESSIONAL ENGINEER
M 22836
EXPIRES 9/30/19
STATE OF CALIFORNIA
DATE SIGNED: 2/15/2017

CAPITAL ENGINEERING
CONSULTANTS, INC.
RANCHO CORDOVA, CALIFORNIA
P.L. 16090.00
P.M. - DESIGN TEAM PROJECT NO.

CONSULTANT

nacht&lewis
600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtandlewis.com
916.329.4000

REGISTERED ARCHITECT
No. C-20487
RENEWAL DATE:
1/21/19
STATE OF CALIFORNIA

ARCHITECT

INITIAL BOX			
NO.	DWG BY	DATE	REVIEWED

REVISIONS			
NO.	DESCRIPTION	DATE	REV
	100% design development	7/9/16	
	75% construction documents	9/29/16	
	DSA submittal	12/31/16	
	DSA approval	02/23/17	

DATE February 23, 2017

JOB NO. Y1538.00

SHEET TITLE

Mechanical
Control/ Piping
Diagram


SHEET NO.

M7.3

SHEET ____ OF ____ TOTAL

ONE AND ONE-HALF INCH = ONE FOOT
THREE-QUARTERS INCH = ONE FOOT
ONE-HALF INCH = ONE FOOT
ONE-QUARTER INCH = ONE FOOT
ONE-EIGHTH INCH = ONE FOOT
ONE-SIXTEENTH INCH = ONE FOOT
ONE INCH = TWENTY FEET

ELECTRIC WATER HEATER SCHEDULE													
UNIT	LOCATION	"AO SMITH" MODEL NO.	STORAGE CAPACITY GALLONS	RECOVERY GALLONS @ 90°F RISE	MAX. TEMP SETTING	TOTAL WATTAGE	KW	VOLTAGE	AMPS	WEIGHT (FULL)	PIPING DETAIL	MOUNTING DETAIL	NOTES
EWH 1	ATTIC	DSE-100	100	82 GPH	110°F 120°F	18,000	18	208V/3ø	50.0	1144	2 P5.1	5 P5.1	SIMULTANEOUS DUAL ELEMENT OPERATION

CIRCULATING PUMP SCHEDULE								
UNIT	LOCATION	"B&O" MODEL NO.	GPM	FT OF HEAD	WATTS	VOLTAGE	CONTROLS	NOTES
 1	ATTIC	NBF-9U/LW	2	6.9	41	115V/1ø	TIME CLOCK	10 LBS SET TIME CLOCK TO TIMES DIRECTED BY DISTRICT

EXPANSION TANK SCHEDULE					
UNIT	LOCATION	"AMTROL" MODEL NO.	TANK VOLUME GALLONS	MAX. ACCEPT. VOLUME	NOTES
 1	ATTIC	ST-20V-C	8.0	0.40	12"ø x 19-1/2", 108 LBS. SUPPORT W/QUICK STRAP #2S-12






































GAS PRESSURE REGULATOR SCHEDULE						
UNIT	LOCATION	"MFR" MODEL NO.	MIN. CAPACITY (MBH)	INLET PRESSURE RANGE MAX/MIN	OUTLET PRESSURE	NOTES
 1	EAST END BUILDING	AMERICAN METER COMPANY SERIES 1813B	800	2 PSIG/1 PSIG	7" WC	PROVIDE WITH HI AND LOW PRESSURE TEST PORTS

WATER HAMMER ARRESTOR						
P.D.I. UNITS	A	B	C	D	E	F
FIXTURE UNITS	1-11	12-32	33-60	61-113	114-154	155-330
"ZURN"	#100	#200	#300	#400	#500	#600
"JR SMITH"	5005	5010	5020	5030	5040	5050

- ### PLUMBING GENERAL NOTES
- SEE ARCHITECTURAL DRAWINGS FOR BUILDING DIMENSIONS AND EXACT LOCATIONS OF PLUMBING FIXTURES.
 - COORDINATE LOCATION OF PIPING WITH OTHER TRADES ON THIS PROJECT.
 - CONCEAL ALL PIPING IN WALL FURRING, PARTITIONS, ETC., EXCEPT AT MECHANICAL ROOMS.
 - PROVIDE BALL VALVES ON WATER PIPE BRANCHES TO EQUIPMENT AND PLUMBING FIXTURES. PROVIDE ACCESS PANELS WHEN LOCATED IN FURRED SPACES OR ABOVE NON-REMOVABLE CEILINGS. ALL VALVES SHALL BE FULL LINE SIZE.
 - SEAL ALL PIPE PENETRATIONS THRU FLOORS WATERTIGHT.
 - PROVIDE GAS SHUT-OFF VALVE, UNION AND DIRT LEG AT EACH GAS CONNECTION TO MECHANICAL EQUIPMENT.
 - DOMESTIC HOT WATER HEATERS SHALL BE SEISMICALLY SECURED TO BUILDING STRUCTURE WITH ADEQUATE STRUCTURAL SUPPORT WITH ANCHOR BOLTS TO WITHSTAND 0.28 LATERAL AND VERTICAL LOADS.
 - PRIOR TO ANY SOLENOID VALVE, QUICK CLOSING VALVE, ETC. PROVIDE AND INSTALL SHOCK ABSORBER OF REQUIRED SIZE.
 - PENETRATIONS OF RATED ASSEMBLIES SHALL BE FIRE-STOPPED. FIRE STOPPING SHALL BE AN APPROVED MATERIAL OF THE ENFORCING AGENCY.
 - OFFSET VENTS THRU ROOF 10 FEET MINIMUM FROM AIR INTAKES AND 4 FEET FROM OUTSIDE WALLS.
 - CONDENSATE DRAIN LINE CONNECTIONS TO MECHANICAL UNITS SHALL INCLUDE MINIMUM 4" DEEP "P" TRAP AND CLEANOUTS AT ALL OFFSETS.
 - ALL MECHANICAL UNITS ARE SHOWN FOR REFERENCE AND COORDINATION ONLY. SEE "M" SHEETS.
 - OFFSET ALL RISERS AND DROPS TO AVOID PENETRATIONS AT TOP PLATES.
 - FIELD VERIFY EXACT SIZES, LOCATIONS AND ELEVATIONS OF ALL PIPING CONNECTIONS, OTHER WORK, ETC., PRIOR TO TRENCHING OR INSTALLING OF ANY NEW WORK.
 - BUILDING SEWER, WATER AND STORM DRAIN RUN APPROXIMATELY 5' MIN. FROM BUILDING SECTION 22 00 50, 22 10 00 AND 22 50 00 APPLIES TO UTILITIES IN THE BUILDING, UNDER THE BUILDING AND TO 5' OUTSIDE THE BUILDING, BEYOND THE 5' OUTSIDE OF THE BUILDING SECTION 33 00 00 GOVERNS.

- ### MEP COMPONENT ANCHORAGE NOTE
- ALL MECHANICAL, PLUMBING, AND ELECTRICAL COMPONENTS SHALL BE ANCHORED AND INSTALLED PER THE DETAILS ON THE DSA APPROVED CONSTRUCTION DOCUMENTS. WHERE NO DETAIL IS INDICATED, THE FOLLOWING COMPONENTS SHALL BE ANCHORED OR BRACED TO MEET THE FORCE AND DISPLACEMENT REQUIREMENTS PRESCRIBED IN THE 2013 CBC, SECTIONS 1616A.1.18 THROUGH 1616A.1.26 AND ASCE 7-10 CHAPTER 13, 26 AND 30.
- ALL PERMANENT EQUIPMENT AND COMPONENTS.
 - TEMPORARY OR MOVABLE EQUIPMENT THAT IS PERMANENTLY ATTACHED (e.g. HARD WIRED) TO THE BUILDING UTILITY SERVICES SUCH AS ELECTRICITY, GAS OR WATER.
 - MOVABLE EQUIPMENT WHICH IS STATIONED IN ONE PLACE FOR MORE THAN 8 HOURS AND HEAVIER THAN 400 POUNDS ARE REQUIRED TO BE ANCHORED WITH TEMPORARY ATTACHMENTS.
- THE FOLLOWING MECHANICAL AND ELECTRICAL COMPONENTS SHALL BE POSITIVELY ATTACHED TO THE STRUCTURE, BUT THE ATTACHMENT NEED NOT BE DETAILED ON THE PLANS. THESE COMPONENTS SHALL HAVE FLEXIBLE CONNECTIONS PROVIDED BETWEEN THE COMPONENT AND ASSOCIATED DUCTWORK, PIPING, AND CONDUIT.
- A. COMPONENTS WEIGHING LESS THAN 400 POUNDS AND HAVE A CENTER OF MASS LOCATED 4 FEET OR LESS ABOVE THE ADJACENT FLOOR OR ROOF LEVEL THAT DIRECTLY SUPPORT THE COMPONENT.
- B. COMPONENTS WEIGHING LESS THAN 20 POUNDS, OR IN THE CASE OF DISTRIBUTION SYSTEMS, LESS THAN 8 POUNDS PER FOOT, WHICH ARE SUSPENDED FROM A ROOF OR FLOOR OR HUNG FROM A WALL.
- FOR THOSE ELEMENTS THAT DO NOT REQUIRE DETAILS ON THE APPROVED DRAWINGS, THE INSTALLATION SHALL BE SUBJECT TO THE APPROVAL OF THE DESIGN PROFESSIONAL IN GENERAL RESPONSIBLE CHARGE OR STRUCTURAL ENGINEER DELEGATED RESPONSIBILITY AND THE DSA DISTRICT STRUCTURAL ENGINEER. THE PROJECT INSPECTOR WILL VERIFY THAT ALL COMPONENTS AND EQUIPMENT HAVE BEEN ANCHORED IN ACCORDANCE WITH ABOVE REQUIREMENTS.

- ### PIPING, DUCTWORK & ELECTRICAL DISTRIBUTION SYSTEM BRACING NOTE
- PIPING, DUCTWORK, AND ELECTRICAL DISTRIBUTION SYSTEMS SHALL BE BRACED TO COMPLY WITH THE FORCES AND DISPLACEMENTS PRESCRIBED IN ASCE 7-10 SECTION 13.3 AS DEFINED IN ASCE 7-10 SECTION 13.6.5.6, 13.6.7, 13.6.8, AND 2013 CBC, SECTIONS 1616A.1.23, 1616A.1.24, 1616A.1.25 AND 1616A.1.26.
- THE METHOD OF SHOWING BRACING AND ATTACHMENTS TO THE STRUCTURE FOR THE IDENTIFIED DISTRIBUTION SYSTEM ARE AS NOTED BELOW. WHEN BRACING AND ATTACHMENTS ARE BASED ON PREAPPROVED INSTALLATION GUIDE (e.g., SMACNA OR OSHPD OPM), COPIES OF THE BRACING SYSTEM INSTALLATION GUIDE OR MANUAL SHALL BE AVAILABLE ON THE JOBSITE PRIOR TO THE START OF AND DURING THE HANGING AND BRACING OF THE DISTRIBUTION SYSTEMS. THE STRUCTURAL ENGINEER OF RECORD SHALL VERIFY THE ADEQUACY OF THE STRUCTURE TO SUPPORT THE HANGER AND BRACE LOADS.
- MECHANICAL PIPING (MP), MECHANICAL DUCTS (MD), PLUMBING PIPING (PP), ELECTRICAL DISTRIBUTION SYSTEMS (E):
- MP□ MD□ PP□ E□ OPTION 1: DETAILED ON THE APPROVED DRAWINGS WITH PROJECT SPECIFIC NOTES AND DETAILS
- MP□ MD□ PP□ E□ OPTION 2: SHALL COMPLY WITH THE APPLICABLE OSHPD PRE-APPROVED (OPM #) #0043-13
- MP□ MD□ PP□ E□ OPTION 3: SHALL COMPLY WITH THE SMACNA SEISMIC RESTRAINT MANUAL, OSHPD EDITION (2009), INCLUDING ANY ADDENDA, FASTENERS AND OTHER ATTACHMENTS NOT SPECIFICALLY IDENTIFIED IN THE SMACNA SEISMIC RESTRAINT MANUAL, OSHPD EDITION, ARE DETAILED ON THE APPROVED DRAWINGS WITH PROJECT SPECIFIC NOTES AND DETAILS. THE DETAILS SHALL ACCOUNT FOR THE APPLICABLE SEISMIC HAZARD LEVEL "B" AND CONNECTION LEVEL "2" FOR THE PROJECT AND CONDITIONS.

PLUMBING LEGEND		
SYMBOL	ABBREVIATION	DESCRIPTION
	ABC	ABOVE CEILING
	AF	ABOVE FINISHED FLOOR
	AFG	ABOVE FINISHED GRADE
	AF, BF	ABOVE FLOOR, BELOW FLOOR
	AD, AP	ACCESS DOOR, ACCESS PANEL
	ANV	ANGLE VALVE
	AQ	AQUASTAT
	AD	AREA DRAIN
	BFP, RP, DCV	BACKFLOW PREVENTER, REDUCED PRESSURE, DOUBLE CHECK VALVE
	BV	BALL VALVE
		BRANCH - TOP CONNECTION
		BRANCH - BOTTOM CONNECTION
		BRANCH - SIDE CONNECTION
	BFV	BUTTERFLY VALVE
	CBV	CALIBRATED BALANCE VALVE
	CB, RD	CATCH BASIN, ROOF DRAIN
		CENTER LINE
	CG	CHASSIS GREASE
	CKV	CHECK VALVE
	CP	CIRCULATING PUMP
	CW	COLD WATER
	CWR	COLD WATER RISE
	CWD	COLD WATER DROP
	CWH, HWH, VWH	COLD WATER HEADER, HOT WATER HEADER, VENT HEADER
	CR	CONCENTRIC REDUCER
	CD	CONDENSATE DRAIN LINE
	PCD	PUMPED CONDENSATE DRAIN
	CO	CLEANOUT
		DEGREES FAHRENHEIT
		DIAMETER, SQUARE (FEET)
	F	FIRE PROTECTION WATER SUPPLY
	FU	FIXTURE UNIT
	FC	FLEXIBLE CONNECTOR
	CO	FLOOR CLEANOUT
	FD	FLOOR DRAIN
	FS	FLOOR SINK
		FLOW IN DIRECTION OF ARROW
	FLV	FLOW LIMITING VALVE
		FLUSH VALVE, FLUSH TANK
		FROM ABOVE, TO ABOVE
		FROM BELOW, TO BELOW
	GSCK, PC	GAS COCK, PLUG COCK
	G	GAS - LOW PRESSURE
	MG	GAS - MEDIUM PRESSURE
	HG	GAS - HIGH PRESSURE
	GPR	GAS PRESSURE REGULATOR VALVE
	GPR	GAS PRESSURE REGULATOR
	GM	GAS METER
		GAS SEISMIC VALVE
	GV	GATE VALVE
	GPM	GALLONS PER MINUTE
	GLV	GLOBE VALVE
	CO	GRADE CLEANOUT
	HD	HOPPER DRAIN, HUB DRAIN
	HB	HOSE BIBB
	HW	HOT WATER PIPING
	HWR	HOT WATER PIPING RISE
	HWD	HOT WATER PIPING DROP
	HW	HOT WATER PIPING WITH HEAT TRACE TAPE
	HWRT	HOT WATER RETURN
	HWRT(R)	HOT WATER RETURN RISE
	HWRT(D)	HOT WATER RETURN DROP
	() HW	HOT WATER (TEMP. °F)
	() HWRT	HOT WATER RETURN (TEMP. °F)
	D	INDIRECT DRAIN, CONDENSATE DRAIN
	(N), (E)	NEW, EXISTING
	(NTS)	NOT TO SCALE
	OH	OVERHEAD
	OF	OVERFLOW RAINWATER LEADER
	OFD	OVERFLOW DRAIN
	AN	PIPE ANCHOR
		PIPE GUIDE
		PIPE IN SLEEVE
	PT	PITCH DOWN IN DIRECTION OF FLOW
	PT	PLUGGED TEE
	POC	POINT OF CONNECTION, NEW TO EXISTING
	PG	PRESSURE GAUGE
	P & TRV	PRESSURE & TEMPERATURE RELIEF VALVE PIPING
	PRV	PRESSURE REDUCING VALVE
	PD	PUMP DISCHARGE LINE
	RWL	RAINWATER LEADER
	WB	RECESSED BOX HOSE BIBB OR WALL HYDRANT
	RV or PATRV	RELIEF VALVE OR PRESSURE & TEMPERATURE RELIEF VALVE
	RET	RETURN
	RE, IE	RLM ELEVATION, INVERT ELEVATION
	(R), (D)	RISE, DROP
		RISER DOWN (ELBOW)
		RISER UP (ELBOW)
		RISE OR DROP
	R, D	ROOF DRAIN
	S, W	SOIL, WASTE OR SANITARY SEWER BELOW FLOOR
		SOLENOID VALVE WITH MOTOR ACTUATOR
	SD	STORM DRAIN
	STR	STRAINER
	T	TEMPERED WATER SUPPLY
	TH	THERMOMETER
	TP	TRAP PRIMER
		TRAP PRIMER PIPING
		TWO WAY CONTROL VALVE
	TYP	TYPICAL
	UN	UNION OR FLANGE
	AV	VALVE WITH MOTOR ACTUATOR
		VALVE IN RISER (TYPE AS INDICATED OR NOTED)
	VB	VALVE IN VALVE BOX (VALVE TYPE SYMBOL AS REQUIRED FOR VALVE TYPE USED)
	V	VENT PIPING
		VENT, VENT RISER, VENT THRU ROOF
	WCO	WALL CLEANOUT
	WHA	WATER HAMMER ARRESTOR
	WM	WATER METER
	PIV	POST INDICATOR VALVE
	FH	FIRE HYDRANT
	FDC	FIRE DEPARTMENT CONNECTION

Dry Creek Joint Elementary School District
District Education Center

8849 Cook Riolo Road, Roseville, CA 95747

Dry Creek Joint Elementary School District

FILE NO. 31-15

IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-115496
AC. TM FLS. HWS. LRS
DATE 2/23/19 CEA

DIVISION OF THE STATE ARCHITECT
revision date: _____ by: _____

REGISTERED PROFESSIONAL ENGINEER
M 22836
EXPIRES 9/30/19
RENEWAL DATE 2/23/19

CAPITAL ENGINEERING
CONSULTANTS, INC.
RANCHO CORDOVA, CALIFORNIA
FL 5010.00
PM - DESIGN TEAM PROJECT NO.

CONSULTANT

nacht&lewis

600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtandlewis.com
916.329.4000

REGISTERED ARCHITECT
No. C-26867
RENEWAL DATE 1/31/19
STATE OF CALIFORNIA

ARCHITECT

INITIAL BOX

NO.	DWG BY	DATE	REVIEWED

REVISIONS

NO.	DESCRIPTION	DATE	REV'D

DATE February 23, 2017

JOB NO. Y1538.00


SHEET TITLE

Plumbing
Legends and Notes

SHEET NO.

P0.1

SHEET ____ OF ____ TOTAL



FILE NO. 31-15

IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES

APPLICATION NO.
02-115496

AC TM FLS None SS B2

DATE 2/23/17 CEAZ

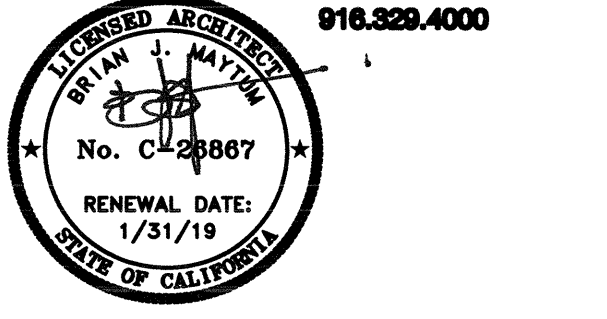
VISION OF THE STATE ARCHITECT

ision date: _____ by: _____



CONSULTANT

nacht&lewis
600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtlewis.com
916.329.4000



ARCHITECT

INITIAL BOX			
NO.	DWG BY	DATE	REVIEWED

REVISIONS			
NO.	DESCRIPTION	DATE	REV'D
	100% design development	7/6/16	
	75% construction documents	9/20/16	
	DSA submittal	12/31/16	
	DSA approval	02/23/17	

DATE February 23, 2017

JOB NO. Y1538.00

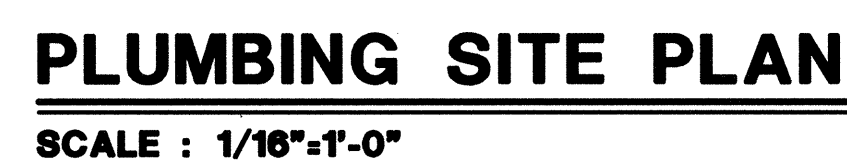
SHEET TITLE

Plumbing Fixture Specification & Connection Schedule


SHEET NO. _____

P0.2

SHEET ____ OF ____ TOTAL





2
P1.0



Dry Creek Joint Elementary School District

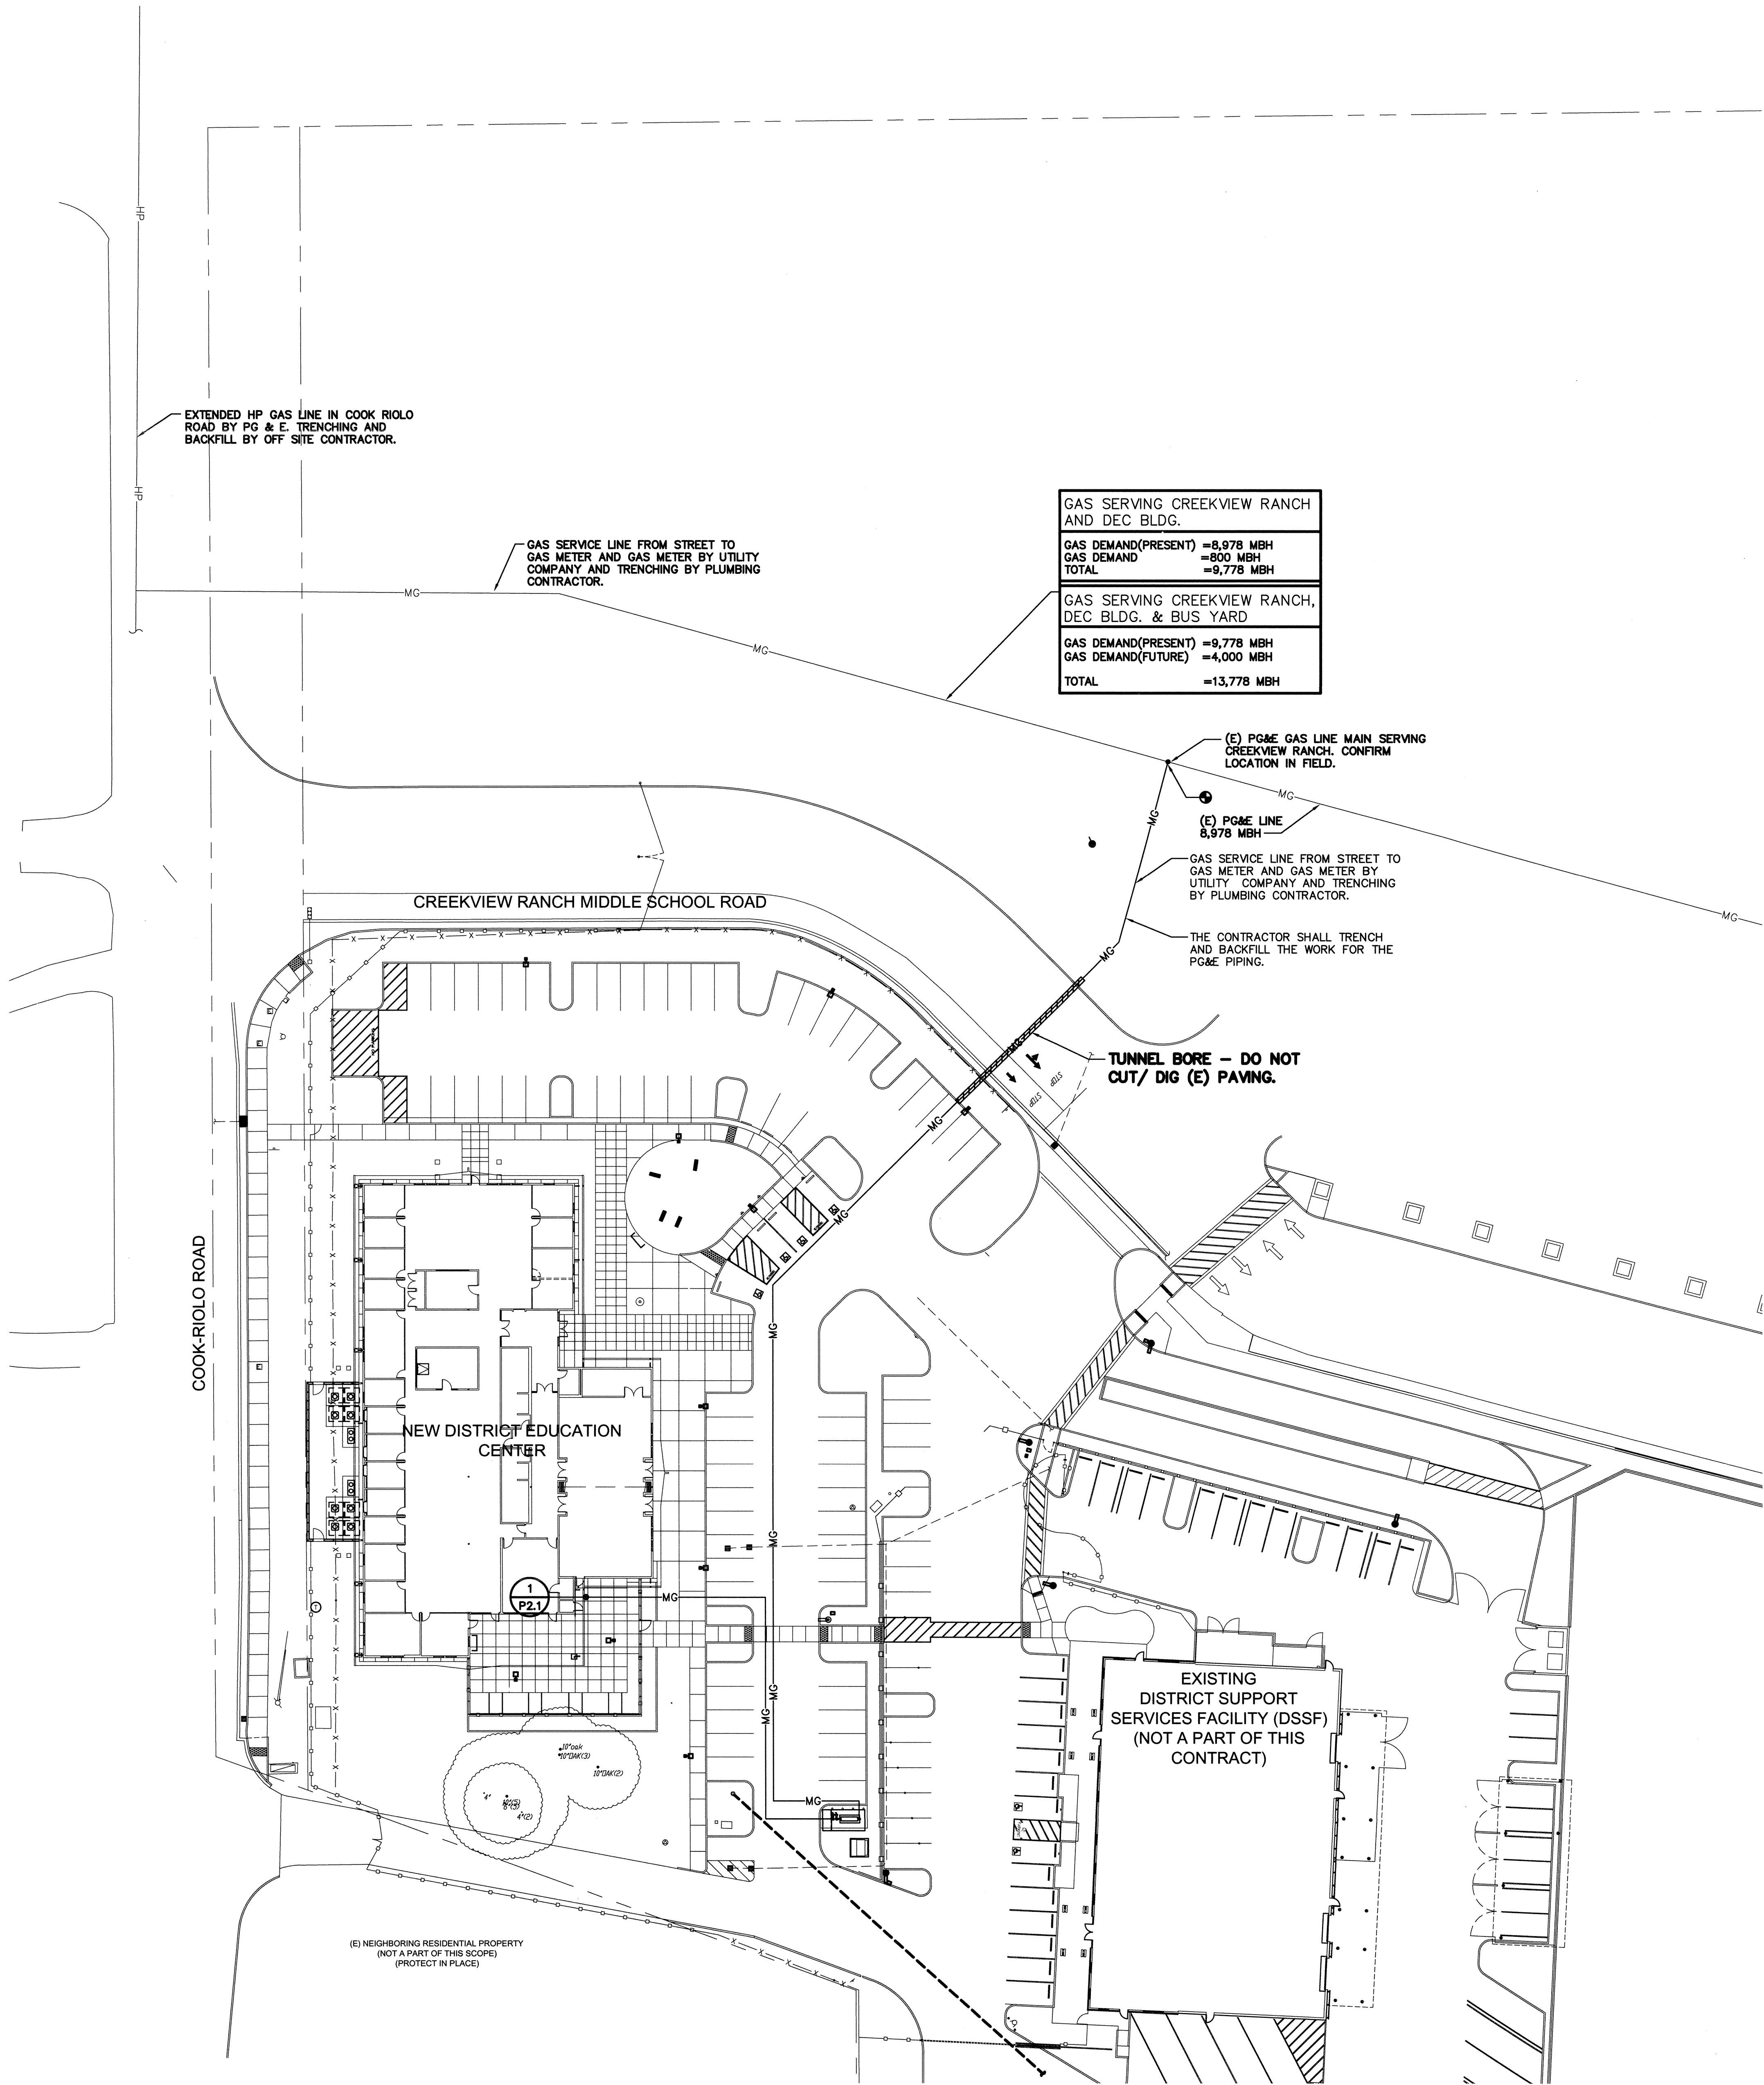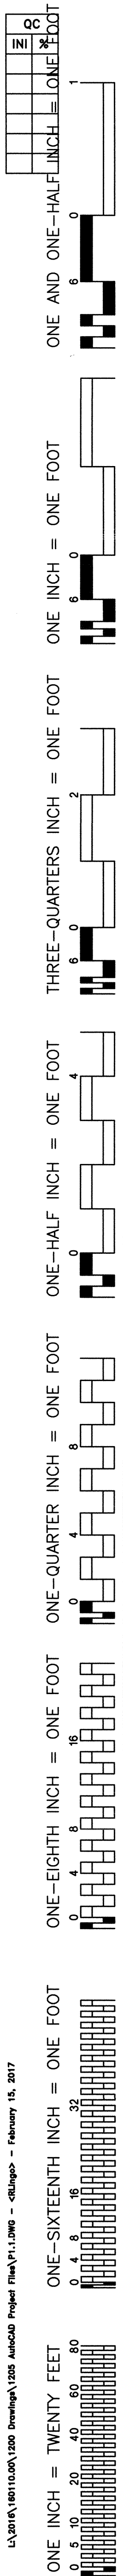SHEET ____ OF ____ TOTAL



GAS SERVING CREEKVIEW RANCH AND DEC BLDG.	
GAS DEMAND(PRESENT)	=8,978 MBH
GAS DEMAND	=800 MBH
TOTAL	=9,778 MBH
GAS SERVING CREEKVIEW RANCH, DEC BLDG. & BUS YARD	
GAS DEMAND(PRESENT)	=9,778 MBH
GAS DEMAND(FUTURE)	=4,000 MBH
TOTAL	=13,778 MBH

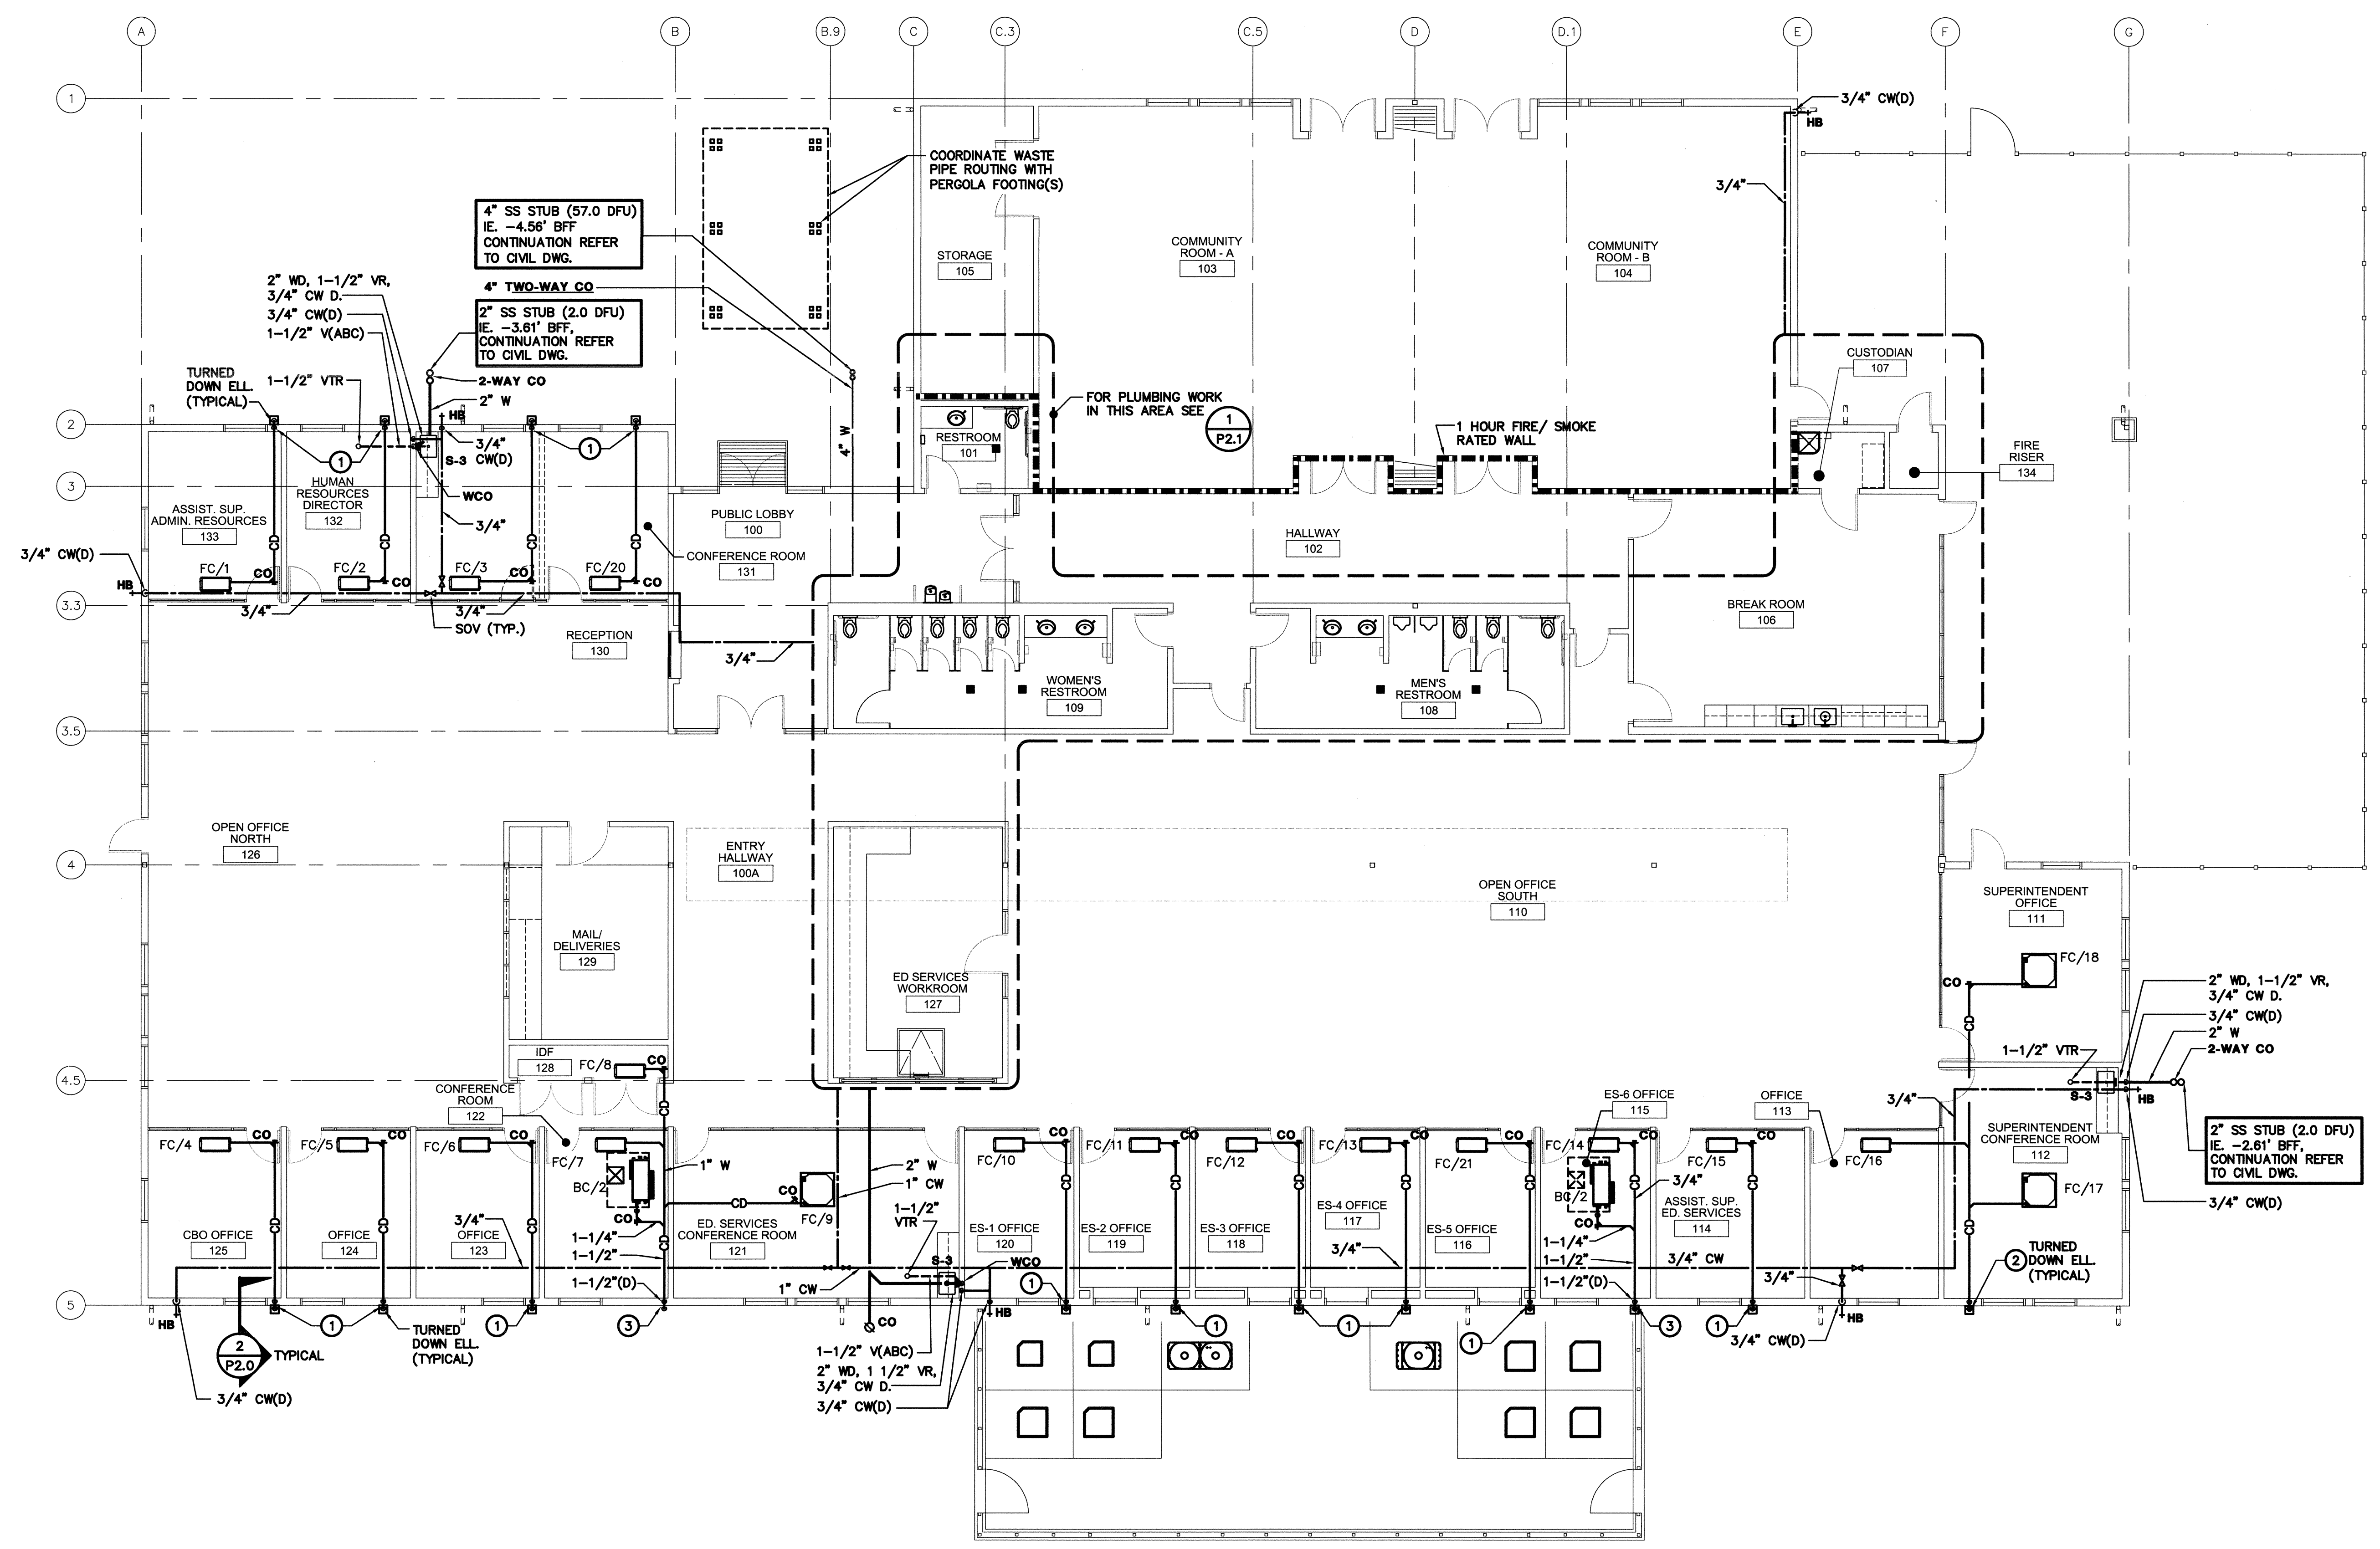
PLUMBING GAS SITE CONNECTION PLAN **1**
SCALE : 1"=30'-0"
NOTE. 1. SEE SHEET P1.0 FOR ADDITIONAL SITE PLUMBING INFORMATION.

Dry Creek Joint Elementary School District
District Education Center
8849 Cook Riolo Road, Roseville, CA 95747
Dry Creek Joint Elementary School District

FILE NO. 31-15
IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES
APPLICATION NO.
02-115496
AC. TR. FLS. DATE SS. RE.
DATE 2/23/17
DIVISION OF THE STATE ARCHITECT
revision date: by:
CONSULTANT
CAPITAL ENGINEERING
CONSULTANTS, INC.
RANCHO CORDOVA, CALIFORNIA
FL 15010.00
PM - DESIGN TEAM PROJECT NO.

nacht&lewis
600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtandlewis.com
916.328.4000
ARCHITECT
INITIAL BOX
NO. DWG BY DATE REVIEWED
REVISIONS
NO. DESCRIPTION DATE REV'D
100% design development 7/6/16
75% construction documents 9/20/16
DSA submittal 12/31/16
DSA approval 02/23/17
DATE February 23, 2017
JOB NO. Y1538.00
SHEET TITLE
Plumbing
Gas Site
Connection Plan
SHEET NO.
P1.1
SHEET OF TOTAL

ONE AND ONE-HALF INCH = ONE FOOT
THREE-QUARTERS INCH = ONE FOOT
ONE-HALF INCH = ONE FOOT
ONE-QUARTER INCH = ONE FOOT
ONE-EIGHTH INCH = ONE FOOT
ONE-SIXTEENTH INCH = ONE FOOT
ONE INCH = TWENTY FEET



GENERAL NOTES

1. NOT ALL BUILDING FOOTINGS ARE SHOWN. FOR FOOTINGS SEE STRUCTURAL DRAWINGS.

2. NOT ALL PERGOLA FOOTINGS ARE SHOWN. FOR FOOTINGS SEE ARCHITECTURAL AND STRUCTURAL DRAWINGS.

SHEET NOTES

1 3/4" CD DROP WITHIN WALL, EXIT WALL AT 12" AFG WITH TURNED DOWN ELL. FOR TYPICAL DETAIL SEE 2/P2.0.

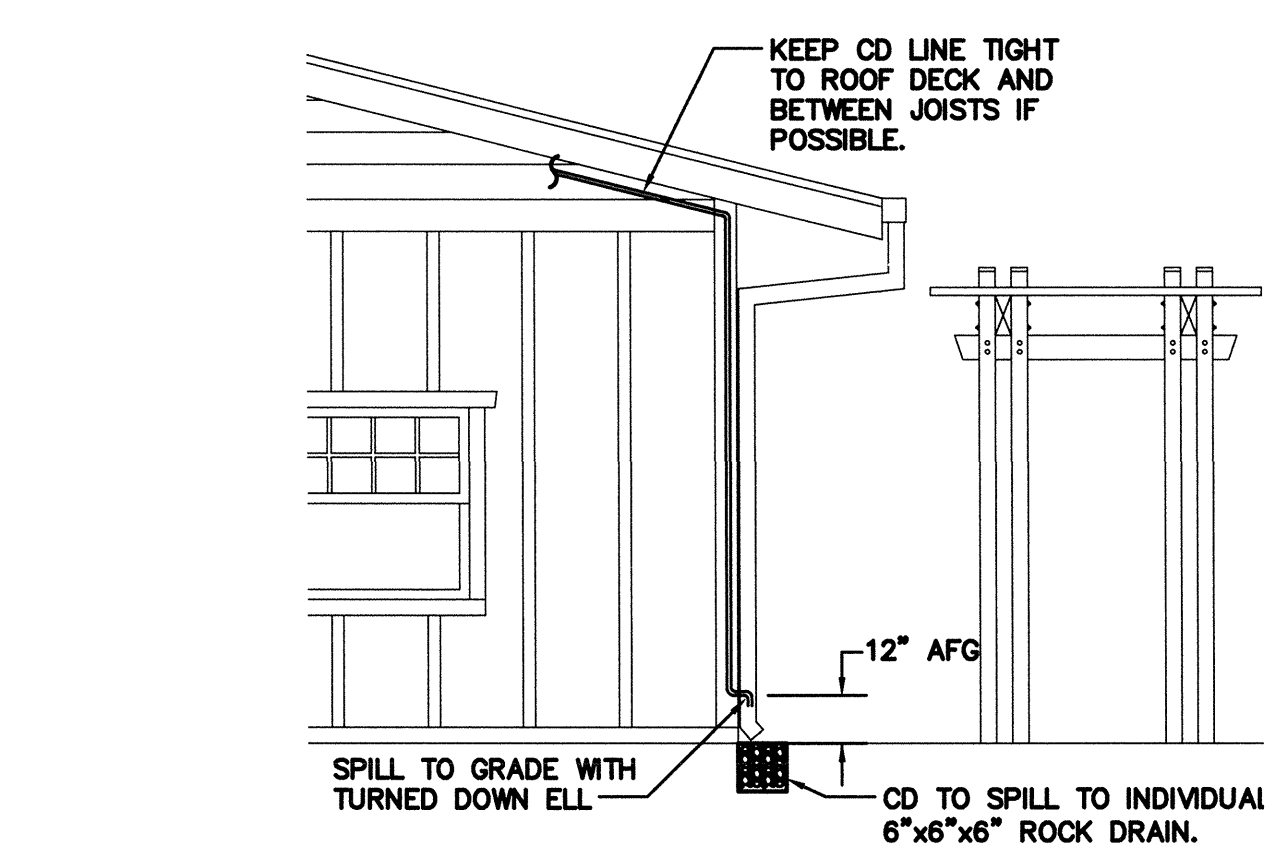
2 1" CD DROP WITHIN WALL, EXIT WALL AT 12" AFG WITH TURNED DOWN ELL. FOR TYPICAL DETAIL SEE 2/P2.0.

3 1-1/2" CD DROP WITHIN WALL, EXIT WALL AT 12" AFG WITH TURNED DOWN ELL. FOR TYPICAL DETAIL SEE 2/P2.0.

PLUMBING FLOOR PLAN

SCALE : 1/8"=1'-0"

1
P2.0



PLUMBING TYPICAL CONDENSATE DRAIN (CD) SPILL TO GRADE.

SCALE : NONE

2
P2.0

FILE NO. 31-15

IDENTIFICATION STAMP DIV. OF THE
STATE ARCHITECT OFFICE OF
REGULATION SERVICES

APPLICATION NO.
02-115496

AC TM FLS JMS SS *[Signature]*
DATE 7/22/19 CA2

DIVISION OF THE STATE ARCHITECT

revision date: _____ by: _____

REGISTERED PROFESSIONAL ENGINEER

M 22836
EXPIRES 9/30/19

DATE SIGNED: 2/15/2017

CAPITAL ENGINEERING CONSULTANTS, INC.
RANCHO CORDOVA, CALIFORNIA

FL 162010.00
PM - DESIGN TEAM PROJECT NO.

CONSULTANT

nacht&lewis

600 Q Street, Suite 100
Sacramento, CA 95811
www.nachtlewis.com
916.829.4000

REGISTERED ARCHITECT

No. C-39867

RENEWAL DATE: 1/31/19

STATE OF CALIFORNIA

ARCHITECT

INITIAL BOX

NO.	DWG BY	DATE	REVIEWED

REVISIONS

NO.	DESCRIPTION	DATE	REV'D

DATE February 23, 2017

JOB NO. Y1538.00

SHEET TITLE

Plumbing
Floor Plan

SHEET NO.

P2.0

SHEET ____ OF ____ TOTAL